

Crosswise Convection Gas Convection Oven, 20 GN2/1

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____


260685 (ECF202GMSZ)

 Gas Convection Oven
 20x2/1GN, crosswise, Q
 Mark

Short Form Specification

Item No.

Main structure in stainless steel, with seamless joints in the oven cavity. Double-glazed door with tempered glass. Cavity lighting. Unique air-flow channel system. Semi-automatic cleaning cycle. Atmospheric burner.

Cooking cycles: air convection, convection/humidifier. Max. temperature of 300°C.

Functional level: base, manual.

"Cross-wise" pan rack suitable for 20x2/1GN or 40x1/1GN.

Supplied with n. 1 roll-in rack, 60mm pitch, and n. 2 roll-in rack slides.

Delivered with nozzles for G30-50 mbar.

Main Features

- IPx4 water protection.
- Racks can be easily removed without the need for special tools.
- Unique air-flow system guarantees perfect distribution of heat throughout the oven cavity.
- Maximum temperature of 300°C.
- Food temperature probe (available as accessory).
- Rapid cooling of oven cavity.
- Halogen lighting and "crosswise" pan supports allow clear and unobstructed view of the products being cooked.
- 5 Stage humidification control, to ensure perfect pastries and succulent roasts.
- Meets the requirements of CE, VDE and DVGW for safety.

Construction

- Access to all components from the front.
- Stainless steel oven cavity with rounded corners.
- Double-glazed door with tempered glass.
- External access door for electrical connections.
- All connections made on the left side below the oven.
- Integrated drain outlet.
- Q Mark model delivered with nozzles for G30-50 mbar.

Included Accessories

- 1 of 60mm pitch roll-in rack for 20x2/1GN PNC 922204

Optional Accessories

- Water softener with salt for ovens with automatic regeneration of resin PNC 921305
- Fat filter for gas 10 and 20 1/1 and 2/1 GN ovens (2 filters are necessary for 20-grid ovens) PNC 921700
- Probe for ovens 20x1/1 and 2/1GN PNC 921704
- Flue condenser for gas ovens 20x2/1GN PNC 921712
- Trolley for 20x2/1GN roll-in rack PNC 922134
- Base for 20x2/1GN roll-in rack PNC 922142
- External side spray unit (needs to be mounted outside and includes support to be mounted on the oven) PNC 922171
- Pair of baking tray support PNC 922173
- Pair of AISI 304 stainless steel grids, GN 2/1 PNC 922175
- 60mm pitch roll-in rack for 20x2/1GN PNC 922204

APPROVAL: _____



Electrolux
PROFESSIONAL

Crosswise Convection Gas Convection Oven, 20 GN2/1

- 80mm pitch roll-in rack for 20x2/1GN PNC 922206
- Pair of frying baskets PNC 922239
- Kit universal skewer rack and 6 short skewers for Lengthwise and Crosswise ovens PNC 922325
- Universal skewer rack PNC 922326
- 6 short skewers PNC 922328
- Volcano Smoker for lengthwise and crosswise oven PNC 922338




Crosswise Convection
Gas Convection Oven, 20 GN2/1


The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2023.06.08

Front

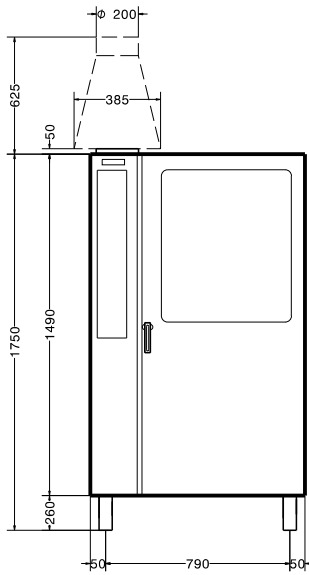


Side

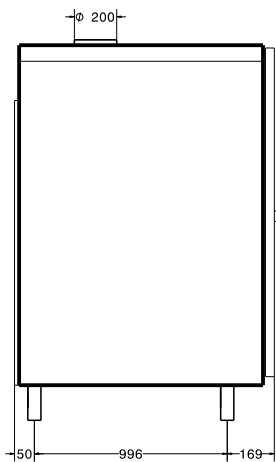

CW11 = Cold Water inlet 1 (cleaning) G = Gas connection
 CW12 = Cold Water Inlet 2 (steam generator)
 D = Drain
 EI = Electrical inlet (power)

Top

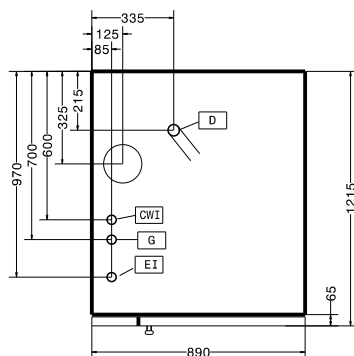

Electric

Supply voltage:
 260685 (ECF202GMSZ) 220-230 V/1 ph/60 Hz
Auxiliary: 1 kW
Electrical power max.: 1 kW

Gas

Gas Power: 50 kW

Capacity:

Shelf capacity: 20

Key Information:

External dimensions, Width: 890 mm
External dimensions, Depth: 1215 mm
External dimensions, Height: 1700 mm
Net weight: 311.8 kg
Height adjustment: 80/0 mm
Functional level: Basic
Type of grids: 2/1 Gastronorm
Runners pitch: 60 mm
Cooking cycles - air-convection: 300 °C
Internal dimensions, Width: 590 mm
Internal dimensions, Depth: 760 mm
Internal dimensions, Height: 1350 mm

Crosswise Convection
Gas Convection Oven, 20 GN2/1

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.