

Crosswise Convection Electric Convection Oven, 20 GN1/1

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA#		



260698 (EFCE21CSDS)

Convection Oven Crosswise 20x1/1GN, electric

Short Form Specification

Item No.

Convection oven with direct steam. Main structure in stainless steel. Cooking chamber with side lightning and drip tray. Double glass door. Heating via "Incoloy" armoured elements positioned on the convector unit. Electromechanical thermostat; temperature adjustable from 30° C to 300°C; visual display and thermometer. Timer from 0 to 120 minutes with acoustic alarm. 5-level humidity control.

Supplied with n. 1 "cross-wise" tray rack composed by 2 side hangers, 60 mm pitch, for 20x1/1GN grids.

Main Features

- Main switch/Cooking mode selector which can be used to set: ON/OFF, hot air without humidification and hot air with humidification (choice of 5 different humidity levels).
- Rapid cooling of oven cavity.
- Timer to set the cooking time, adjustable up to 120 minutes or for continuous operation with an acoustic alarm to show the cycle has finished. At the end of the set cooking time the heat and the fan are automatically switched off.
- Maximum temperature of 300°C.
- Perfect evenness: guarantees perfect distribution of heat throughout the oven cavity.
- Halogen lighting and "crosswise" pan supports allow clear and unobstructed view of the products being cooked.
- Food temperature probe (available as accessory).
- Drip tray to collect residual cooking juices and fat.
- Drip tray under the door to collect condensed liquid available as accessory.
- Manual valve to adjust the position of steam evacuation flap.
- Capacity: 20 GN 1/1 trays.

Construction

- Robust structure thanks to stainless steel construction.
- Cooking chamber in 430 AISI stainless steel.
- Double thermo-glazed door with open frame construction, for cool outside door panel. Swing hinged easy-release inner glass on door for easy cleaning.
- Ergonomic door handle.
- Integrated drain outlet.
- 1 pair of 60 mm pitch runners is supplied as standard.
- IPx4 water protection.

Included Accessories

• 1 of 60mm pitch roll-in rack for 20x1/1GN (included with the oven)

Optional Accessories

on the oven)

Pair of AISI 304 stainless steel grids, GN 1/1
Support for 1/2GN pan (2pcs)
Probe for ovens 20x1/1 and 2/1GN
Trolley for 20x1/1GN roll-in rack
Base for 20x1/1GN roll-in rack
External side spray unit (needs to be mounted outside and includes support to be mounted

APPROVAL:





Crosswise Convection Electric Convection Oven, 20 GN1/1

•	2 fat filters for 20 1/1 and 2/1 GN combi steamers (gas and electric) and convection ovens (electric)	PNC 922179	
•	60mm pitch roll-in rack for 20x1/1GN (included with the oven)	PNC 922203	
•	80mm pitch roll-in rack for 20x1/1GN	PNC 922205	
•	Pair of frying baskets	PNC 922239	
•	Kit universal skewer rack and 6 short skewers for Lengthwise and Crosswise ovens	PNC 922325	
•	Universal skewer rack	PNC 922326	
•	Volcano Smoker for lengthwise and crosswise oven	PNC 922338	












Crosswise Convection Electric Convection Oven, 20 GN1/1

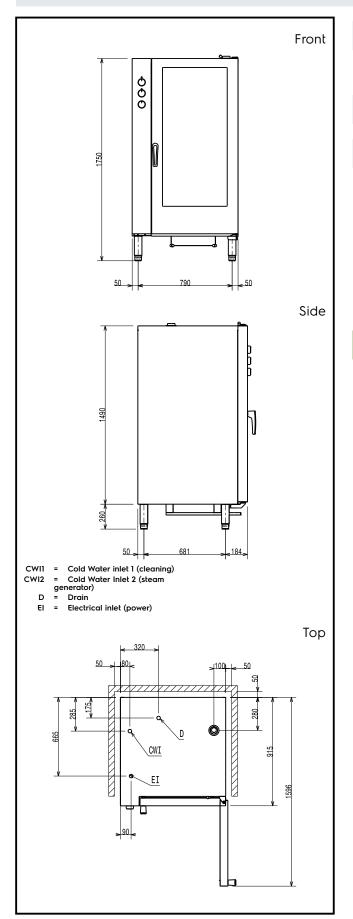

C E EC TECHE UK

Electric Supply voltage: 380-400 V/3N ph/50 Hz Auxiliary: 1 kW Electrical power, max: 34.5 kW Capacity: Trays type: 20 (GN 1/1) **Key Information:** External dimensions, Width: 890 mm External dimensions, Depth: 900 mm External dimensions, Height: 1700 mm Net weight: 215.5 kg Height adjustment: 80/0 mm Functional level: Basic Cooking cycles - airconvection: 300 °C

ISO Certificates

Internal dimensions, Width:

Internal dimensions, Depth:

Internal dimensions, Height:

ISO 9001; ISO 14001; ISO 15001; ISO 15001; ISO 15001

590 mm

503 mm

1350 mm

Crosswise Convection Electric Convection Oven, 20 GN1/1

