

# Crosswise Convection Gas Convection Oven, 10 GN1/1

ITEM #	
MODEL #	
MODEL #	
NAME #	
SIS #	
AIA#	



260819 (EFCG11CSAS)

Convection Oven Crosswise 10x1/1GN, gas

## **Short Form Specification**

## Item No.

Convection oven with direct steam. Main structure in stainless steel. Cooking chamber with side lightning and drip tray. Double glass door. Heating via atmospheric burners with flame failure device. Main burner with pilot light and piezoelectric ignition. Electromechanical thermostat; temperature adjustable from 30°C to 300°C. Timer from 0 to 120 minutes with acoustic alarm. 5-level humidity control.

Supplied with n. 1 "cross-wise" tray rack composed by 2 side hangers, 60 mm pitch, for 10x1/1GN grids.

## **Main Features**

- Main switch/Cooking mode selector which can be used to set: ON/OFF, hot air without humidification and hot air with humidification (choice of 5 different humidity levels).
- Rapid cooling of oven cavity.
- Timer to set the cooking time, adjustable up to 120 minutes or for continuous operation with an acoustic alarm to show the cycle has finished. At the end of the set cooking time the heat and the fan are automatically switched off.
- Maximum temperature of 300°C.
- Perfect evenness: guarantees perfect distribution of heat throughout the oven cavity.
- Halogen lighting and "crosswise" pan supports allow clear and unobstructed view of the products being cooked.
- Food temperature probe (available as accessory).
- Drip tray to collect residual cooking juices and fat.
- Drip tray under the door to collect condensed liquid available as accessory.
- Capacity: 10 GN 1/1 trays.

#### Construction

- Robust structure thanks to stainless steel construction.
- Cooking chamber in 430 AISI stainless steel.
- Double thermo-glazed door with open frame construction, for cool outside door panel. Swing hinged easy-release inner glass on door for easy cleaning.
- Ergonomic door handle.
- Integrated drain outlet.
- 1 pair of 60 mm pitch runners is supplied as standard.
- IPx4 water protection.

## **Included Accessories**

 1 of 60mm pitch side hangers 10x1/1GN gas oven (included with the oven)
 PNC 922122

## Optional Accessories

base

• Pair of AISI 304 stainless steel PNC 921101 🔲 grids, GN 1/1 PNC 921106 📮 • Support for 1/2GN pan (2pcs) Fat filter for gas 10 and 20 1/1 and PNC 921700  $\Box$ 2/1 GN ovens (2 filters are necessary for 20-grid ovens) Flue condenser for gas ovens PNC 921701 🚨 10x1/1-2/1 • Probe for ovens 6 and 10x1/1GN PNC 921702 🗆 • Guide kit for 1/1GN drain pan PNC 921713 🚨 • Pair of grids for whole chicken (8 PNC 922036 ☐ per grid - 1,2kg each), GN 1/1 Open base for 10 GN 1/1 PNC 922102 🚨 convection oven

Shelf guides for 10x1/1GN, ovens PNC 922106 □

### APPROVAL:





# **Crosswise Convection** Gas Convection Oven, 10 GN1/1

PNC 922109	
PNC 922114	
PNC 922116	
PNC 922122	
PNC 922127	
PNC 922130	
PNC 922170	
PNC 922171	
PNC 922239	
PNC 922266	
PNC 922325	
PNC 922326	
PNC 922338	
	PNC 922114 PNC 922116 PNC 922122 PNC 922127 PNC 922130 PNC 922170 PNC 922171 PNC 922171 PNC 922239 PNC 922266 PNC 922325












# **Crosswise Convection** Gas Convection Oven, 10 GN1/1

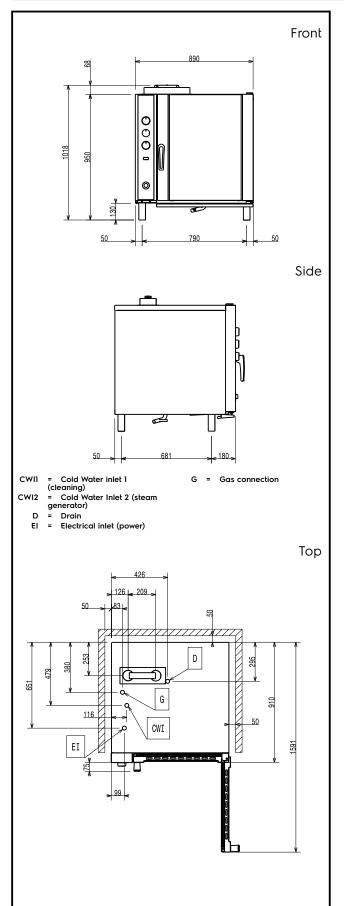

Electric Supply voltage: 220-230 V/1 ph/50 Hz Auxiliary: 0.35 kW Electrical power, max: 0.35 kW Gas Gas Power: 18.5 kW Capacity: Trays type: 10 (GN 1/1) **Key Information:** External dimensions, Width: 890 mm External dimensions, Depth: 900 mm 970 mm External dimensions, Height: Net weight: 136 kg Functional level: Basic Cooking cycles - air-convection: 300 °C Internal dimensions, Width: 590 mm Internal dimensions, Depth: 479 mm Internal dimensions, Height: 680 mm **ISO Certificates** 

ISO 9001; ISO 14001; ISO ISO Standards: 45001; ISO 50001









