



## Salamanders Ultra Rapid Electric Salamander, open on 3 sides - 600 mm



283011 (E0UUCEBOMOH)

Electric Salamander, Ultra Rapid, open on 3 sides, with Plate detection system, 600 mm, accepts GN 1/1

283012 (E0UUCDBOMOH)

Electric Salamander, Ultra Rapid, open on 3 sides, with Plate detection system, 600 mm, accepts GN 1/1

### Short Form Specification

#### Item No.

Constructed in AISI 304 stainless steel. Table top model can be hanged on the wall with wall brackets (optional). Open on 3 sides. 2 individually controlled cooking zones heated by high efficient infrared heating elements. No preheating needed, reduced heat emission in the kitchen. Control knob to set cooking time (from 0 to 99 minutes) showed on digital display. Touch-controlled plate detecting bar to activate heating elements. Air vents along the upper side for evacuating heat and smoke. Movable plate, sliding smoothly up and down along a rail system. Removable chromed steel cooking grid and stainless steel grease collecting container.

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_

### Main Features

- 2 independent high-efficient tungsten filament heating elements allowing to heat up a half or full cooking surface.
- Fast heat up: about 20 seconds to work at full performance.
- Cooking plate size: 600x350 mm accept GN 1/1.
- Touch-controlled plate detecting bar switches on the salamander when the plate is placed in the appliance and switches it off when the plate is removed.
- Control panel with a knob and digital display to set the cooking time.
- Timer can be set from 0 to 99 minutes and interrupts electricity supply at the end of cooking time.
- Set time can be stored to simplify the repetition of similar cooking cycles.
- START and STOP touch button.

### Construction

- Made of AISI 304 stainless steel.
- Air vents along the upper side for evacuating heat and smoke.
- Removable stainless steel drip tray.
- Movable upper plate.
- Chromium-plated steel grid with a safety stop to avoid accidental fall.
- Table top unit can be wall mounted with dedicated optional accessory.
- 4 rubber feet.

### Sustainability

- This model is compliant with Swiss Energy Efficiency Ordinance (730.02).



### Optional Accessories

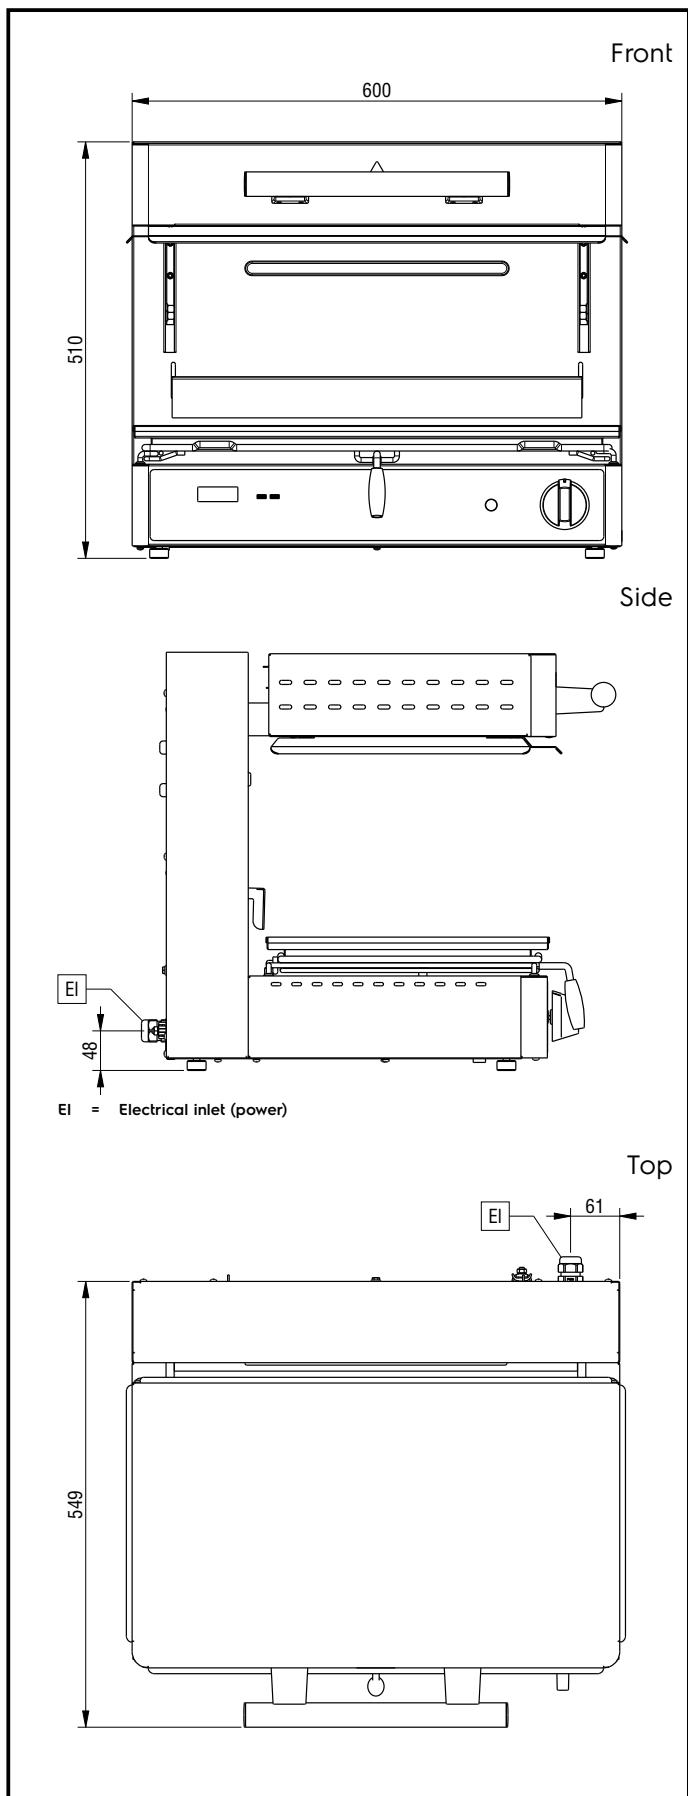
- Wall mounted brackets kit for salamanders open on 3 sides

PNC 283035

### APPROVAL:



Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)


**Electric**
**Supply voltage:**

283011 (E0UUCEBOMOH) 220-240 V/1 ph/50/60 Hz  
 283012 (E0UUUCDBOMOH) 380-415 V/3N ph/50/60 Hz

**Electrical power, max:**

4 kW

**Key Information:**

External dimensions, Width: 600 mm

External dimensions, Depth: 549 mm

External dimensions, Height: 510 mm

Net weight: 50 kg