

Ice Cuber 28kg/24h with 9kg bin - Air cooled, Self Contained

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____


730578 (RIMC32SA6)

 Ice Maker, cube, 28kg/24h,
 self-contained, 9kg ice
 collection bin included, air-
 cooled

Short Form Specification

Item No. _____

AISI 304 stainless steel exterior. Food grade ABS interior. Metal spray arms removable without the use of tools. Fully automatic in operation. Efficient air cooling system. Suitable for gravity drain only. Flexible water supply and drain hoses. A spray system produces solid, crystal clear ice cubes.

Rated output is at an ambient air temperature of 21°C and water supply temperature of 15°C.

Self-contained storage bin capacity: 9 Kg.

Main Features

- Fully automatic in operation.
- Operates over a wide range of temperatures.
- Suitable for gravity drain only.
- Rated output is at an ambient air temperature of 21°C and water supply temperature of 15°C.
- Compliant to CE requirements for safety.
- Compact dimensions of the ice cubers make them highly suitable for any location, particularly those where space is at a premium.
- The ice-making method (spray layering) guarantees crystalline, compact, hygienically pure ice cubes that are resistant to melting.
- Model available in air-cooled version.
- Ice cube cone shape with the trunk sides slightly squashed.
- Bin integrated as standard.


Construction

- AISI 304 stainless steel exterior.
- Plug as standard (schuko type).
- Stainless steel spray arms removable without the use of tools.
- Easy access to the main components for maintenance.
- Reliability guaranteed by the quality of the construction materials used (plastic flap on the front, top and sides in 304 AISI stainless steel) and the sophisticated product and process technology involved.
- The sprayers are easy to take away, permit a simple flowing and prevent limestone formation.
- 5mm feet.
- Internal ice cubes container in ABS.
- Environmentally friendly: R452a as refrigerant gas.


APPROVAL: _____



Front

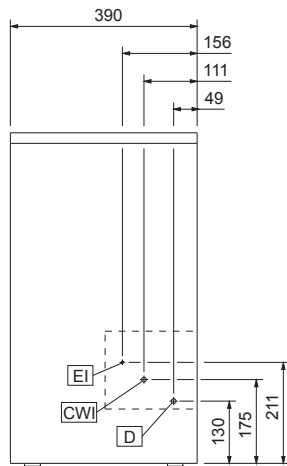


Side

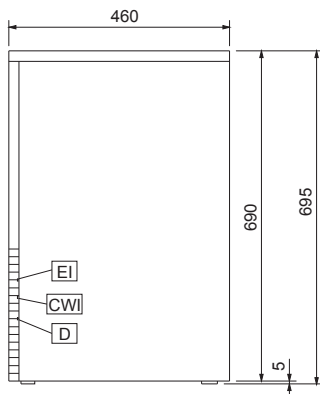

- CWI = Cold Water inlet 1 (cleaning)
- D = Drain
- EI = Electrical inlet (power)

Top

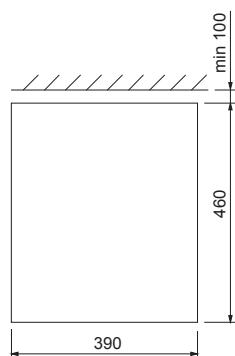

Electric

Supply voltage:

730578 (RIMC32SA6) 230 V/1N ph/60 Hz

Electrical power max.:

0.37 kW

Capacity:

Bin capacity:

9 kg

Key Information:

External dimensions, Width: 390 mm

External dimensions, Depth: 460 mm

External dimensions, Height: 695 mm

Net weight: 37 kg

Output: 28 kg/day

Sustainability

Refrigerant type:

R452A

