

## Pizza counters Bench Type Refrigerated Show Case 2400mm

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**291216 (ZVR2400H)**

 Bench type Refrigerated  
 Show Case 2400 mm

### Short Form Specification

**Item No.** \_\_\_\_\_

Constructed in 304 AISI stainless steel. Designed for use with 1/4GN and 1/2GN containers (not included). Built-in refrigeration unit. Refrigerant R290. Thermostatic temperature control. Temperature range: 0+10°C. CFC and HCFC free.

### Main Features

- Complies with main international certification bodies and is CE marked.
- Supplied for use without the protective glass panels (side, back and top) which must be ordered separately as accessories.
- Designed for use with the specific sets of stainless steel 1/4 and 1/2 GN containers (without lids) which are available as accessories.
- Showcase suitable to accommodate ¼ and ½ GN trays available as accessories.
- Tropicalized unit.

### Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Showcase provided with power supply cable exit on left or back sides to suit all type of installations.


### Sustainability

- Provided with its own integral, highly efficient refrigeration unit with low noise emission and reduced energy consumption. Temperature thermostatically controlled.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.

### Optional Accessories

- Glass panels for refrigerated showcase, 2400 mm PNC 291499
- GN containers for refrigerated 2400 mm show case - n. 6x1/4 + n. 3x1/2 h. 150 mm PNC 921853

**APPROVAL:** \_\_\_\_\_

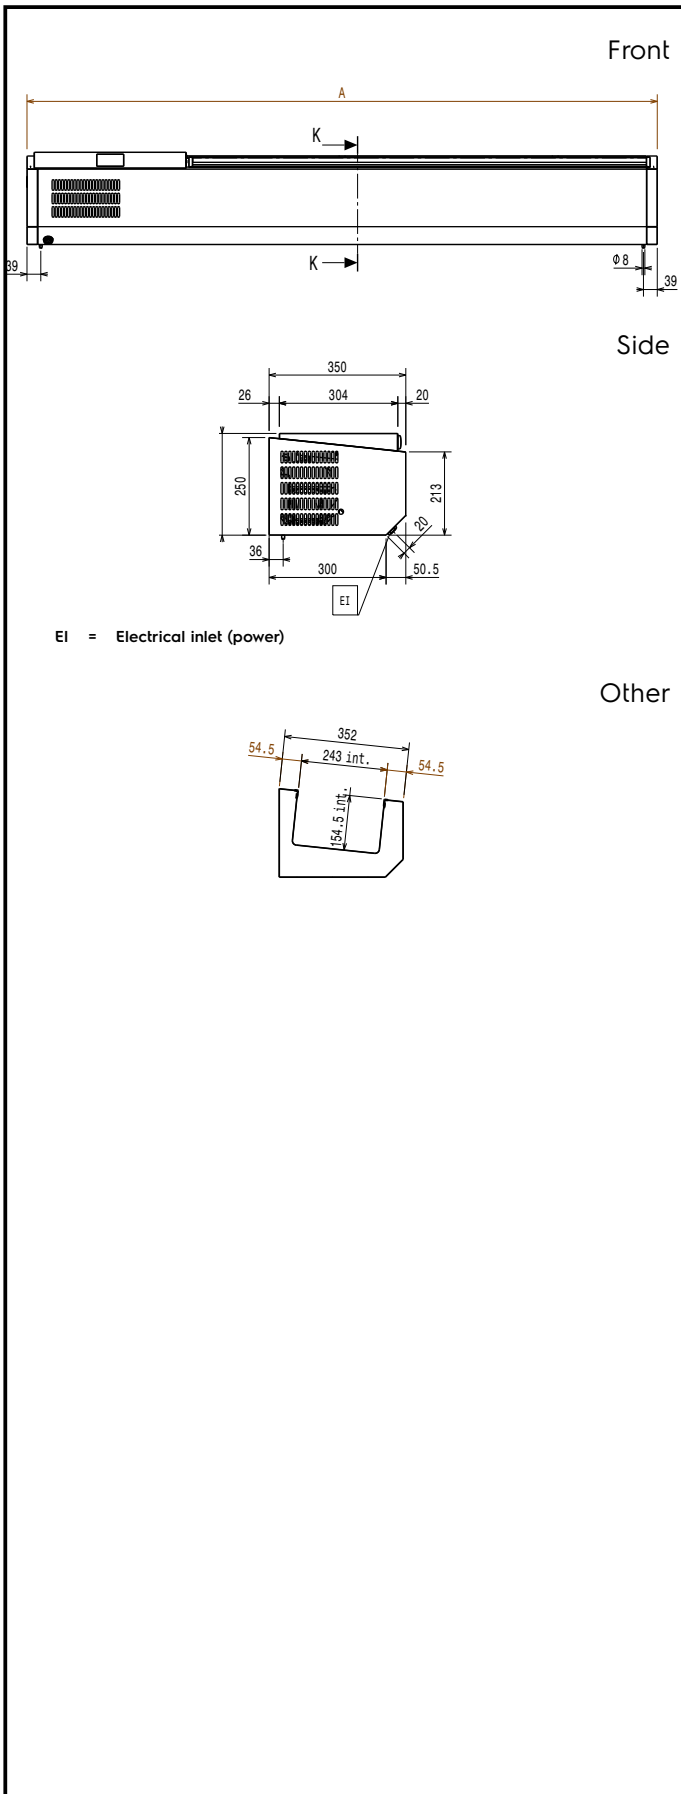

### Electric

<b>Supply voltage:</b>	291216 (ZVR2400H)	220-240 V/1 ph/50 Hz
<b>Electrical power max.:</b>		0.24 kW

### Key Information:

<b>External dimensions, Width:</b>	2400 mm
<b>External dimensions, Depth:</b>	350 mm
<b>External dimensions, Height:</b>	250 mm
<b>Net weight:</b>	51 kg

### Refrigeration Data

<b>Control type:</b>	Digital
<b>Operating temperature min.:</b>	0 °C
<b>Operating temperature max.:</b>	10 °C

### ISO Certificates

<b>ISO Standards:</b>	ISO 9001; ISO 14001; ISO 45001; ISO 50001
-----------------------	-------------------------------------------

### Sustainability

<b>Refrigerant type:</b>	R290
<b>Refrigeration power:</b>	314 W