

## Food slicers 300 mm Vertical Slicer, belt transmission

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**601139 (MSV30B)**

Vertical Slicer 300mm, belt  
transmission (230V; 1+N; 50)

**601115 (MSV30B6)**

Vertical Slicer 300mm, belt  
transmission (230V; 1+N; 60)

### Short Form Specification

#### Item No. \_\_\_\_\_

Medium duty slicer for Hotel and Catering  
Ideal for slicing raw meat, salami and pressed meat.  
Base and main components in high polished satin finished  
anodized aluminium for long lasting, hygiene and ease of  
cleaning. The blade is in chrome force steel with blade guard  
ring for added protection. Model equipped with cut thickness  
adjusting knob, top mounted sharpener, cover blade and  
product deflector - easily removable for cleaning. Ventilated  
blade drive motor. Poly V-belt drive system for quiet operation  
and economical service. Removable carriage system  
permanently lubricated with automatic clutch. IP42 water  
protection.  
Supplied with blade removal tool.

### Main Features


- Manual Vertical slicer.
- Slice thickness from 0 to 15 mm.
- Cut thickness-adjusting knob (millimeter adjustment).
- Belt driven transmission.
- Ventilated blade drive motor designed for continuous use, with Poly V-belt drive system for quiet operation and economical service.
- Removable carriage system permanently lubricated with automatic clutch.
- Top-mounted stone blade sharpener and cover blade easy to remove.
- Supplied with blade removal tool.
- Highest degree of safety in functioning, cleaning and maintenance.
- Cutting capacity for 300 mm model:
  - square: 220x220 mm
  - rectangular: 230x220 mm
  - round: 220 mm

### Construction


- Compact design.
- Made in high polished satin finished anodized aluminium. This procedure guarantees high hygienic standards of the parts interested by the cut and resistance to acids, salts and oxidation processes.
- Plexiglass safety hand guard as standard.
- IP42 water protection.
- IP67 complete waterproof.
- The blade is made of chrome forged steel with blade guard ring for added protection.

**APPROVAL:** \_\_\_\_\_

Front

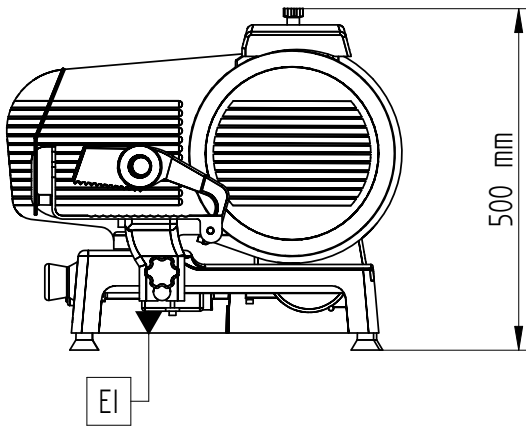


Side

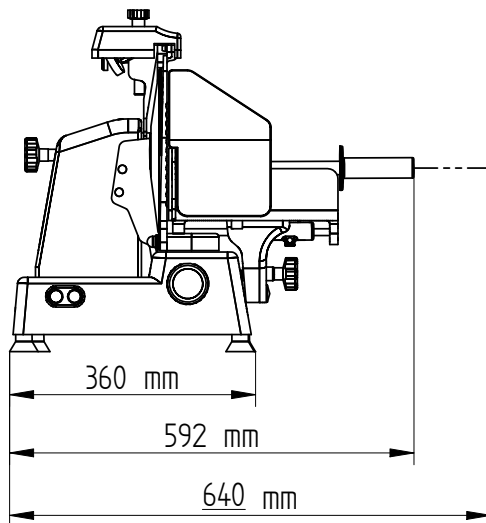

EI = Electrical inlet (power)

Top

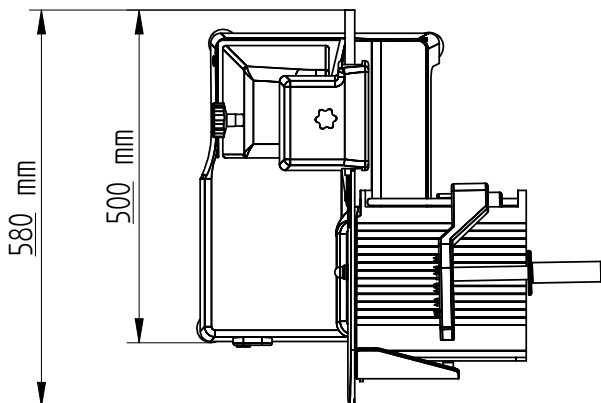

### Electric

#### Supply voltage:

601139 (MSV30B) 230 V/1N ph/50 Hz

601115 (MSV30B6) 230 V/1N ph/60 Hz

#### Total Watts:

0.2 kW

### Key Information:

External dimensions, Width: 650 mm

External dimensions, Depth: 630 mm

External dimensions, Height: 540 mm

Net weight (kg): 46