
Electrolux PROFESSIONAL

Ventilation Equipment 304 S_S Wall Hood+Filter+Lamps 4000x1100mm

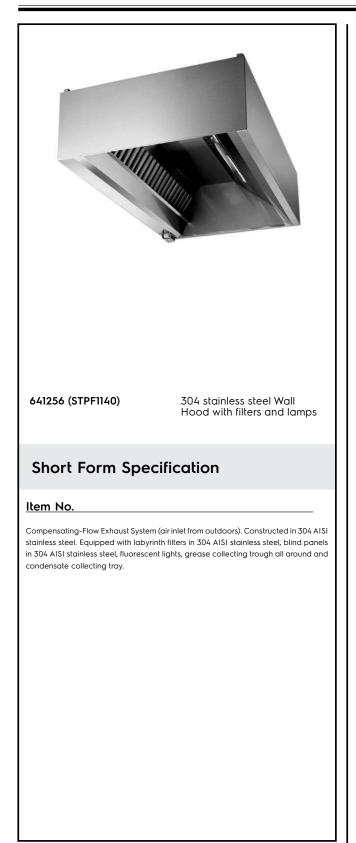

TEM #
MODEL #
NAME #
SIS #
AIA #

Main Features

- External panels with upturned edges to avoid injuries.
- Heating and air conditioning costs reduced thanks to the compensated air flow.
- Low noise level.

Construction


- Outlet holes are sized in order to minimize drops in pressure.
- Labyrinth filters guarantee constant filtration to avoid clogging and to protect against fire.
- Perimetral gutter with drain hole to transfer grease into a 304 AISI container.
- 304 AISI stainless steel labyrinth filters easily removable for cleaning.
- Built-in lighting with protective screen.
- Optional accessory: air intake Plenum, which is insulated to avoid condensation.
- Rear exhaust with filters and front air intake through a narrow slot sized to obtain the correct induction effect.
- Perforated panel inside the intake circuit guarantees a perfect and uniform air distribution.
- Completely insulated intake area to avoid external condensation.
- Two separate air circuits (extraction and intake) to reduce the quantity of treated air released in the environment.
- Entirely constructed in 304 AISI stainless steel.

Optional Accessories

• Extraction plenum for 4000mm PNC 640142 hood

APPROVAL:

Electrolux PROFESSIONAL

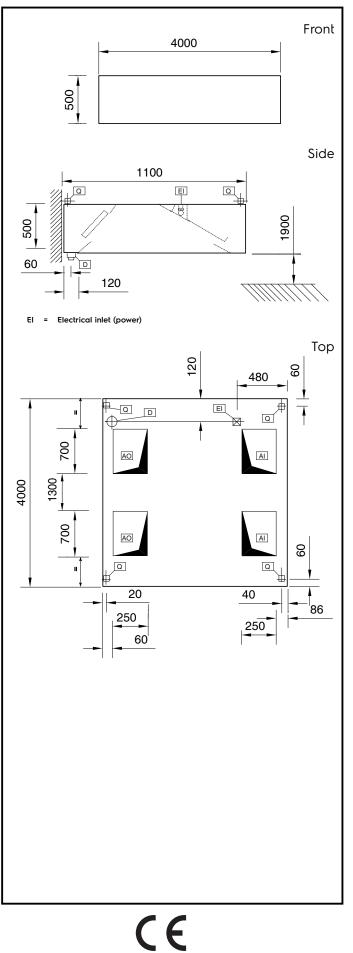

Ventilation Equipment 304 S_S Wall Hood+Filter+Lamps 4000x1100mm

Electric	
Supply voltage: 641256 (STPF1140) Total Watts:	220 V/1N ph/50 Hz 0.32 kW
Capacity:	
Supply capacity:	3690 m³/h
Key Information:	
External dimensions, Width: External dimensions, Depth: External dimensions, Height: Net weight:	4000 mm 1100 mm 500 mm 240 kg
Air Emission:	
Air capacity:	4900 mc/h

Ventilation Equipment 304 S_S Wall Hood+Filter+Lamps 4000x1100mm

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.