

Ventilation Equipment 304 S/S Wall Hood+Filters 2800X1600mm



Construction

• Low noise level.

Main Features

• Eyebolts and screw anchors for ceiling installation.

• External panels with upturned edges to avoid injuries.

• Perimetral welded gutter with condensate drain (diam.=

• Prearranged for installation of lighting.

- Labyrinth filters guarantee constant filtration to avoid clogging and to protect against fire.
- 304 AISI stainless steel blind panels for a correct exhaustion.
- Outlet holes are sized in order to minimize drops in pressure.
- Internal baffle to facilitate steam condensation and collection.
- Entirely constructed in 304 AISI stainless steel.
- 304 AISI stainless steel labyrinth filters easily removable for cleaning.

640033 (EPF1628)

304 stainless steel Wall Hood with filters

Short Form Specification

Item No.


Constructed in 304 AISI stainless steel. Continuously welded joints. Equipped with labyrinth filters (positioned on front) in 304 AISI stainless steel, blind panels in 304 AISI stainless steel, grease collecting trough all around and condensate drain sleeve. The rear baffle directs the fumes towards the filter surface, condensing the steam which is then conveyed through the outer ducting into the discharge. Suitable for use where large volumes of steam must be exhausted (i.e. ovens, dishwashers, pan washers, etc.)

APPROVAL:





Ventilation Equipment 304 S/S Wall Hood+Filters 2800X1600mm

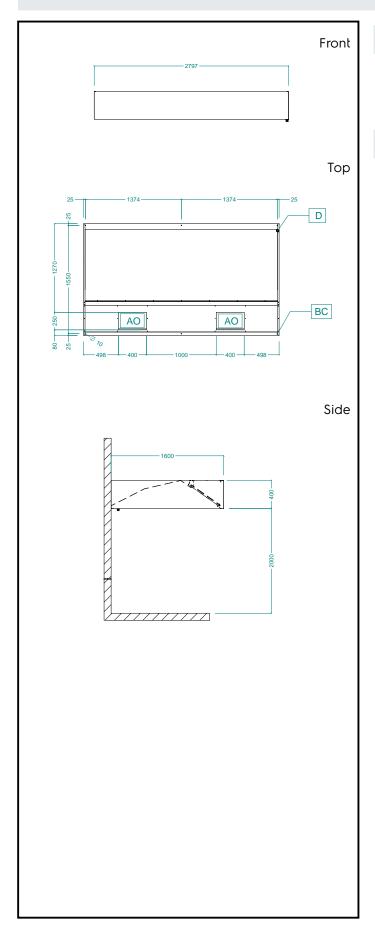

Key Information:

External dimensions, Width:

640033 (EPF1628)2800 mmExternal dimensions, Depth:1600 mmExternal dimensions, Height:400 mmNet weight:68 kg

Air Emission:

Air capacity: 5900 mc/h