

Ventilation Equipment

304 S_S Wall Hood+Filters+Lamps 3200x1300mm

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____


640231 (STPF1332)

304 stainless steel Wall Hood with filters and lamps

Short Form Specification

Item No. _____

Compensating-Flow Exhaust System (air inlet from outdoors). Constructed in 304 AISI stainless steel. Equipped with labyrinth filters in 304 AISI stainless steel, blind panels in 304 AISI stainless steel, fluorescent lights, grease collecting trough all around and condensate collecting tray.


Main Features

- External panels with upturned edges to avoid injuries.
- Heating and air conditioning costs reduced thanks to the compensated air flow.
- Low noise level.

Construction

- Outlet holes are sized in order to minimize drops in pressure.
- Labyrinth filters guarantee constant filtration to avoid clogging and to protect against fire.
- Perimetral gutter with drain hole to transfer grease into a 304 AISI container.
- 304 AISI stainless steel labyrinth filters easily removable for cleaning.
- Built-in lighting with protective screen.
- Optional accessory: air intake Plenum, which is insulated to avoid condensation.
- Rear exhaust with filters and front air intake through a narrow slot sized to obtain the correct induction effect.
- Perforated panel inside the intake circuit guarantees a perfect and uniform air distribution.
- Completely insulated intake area to avoid external condensation.
- Two separate air circuits (extraction and intake) to reduce the quantity of treated air released in the environment.
- Entirely constructed in 304 AISI stainless steel.

APPROVAL: _____

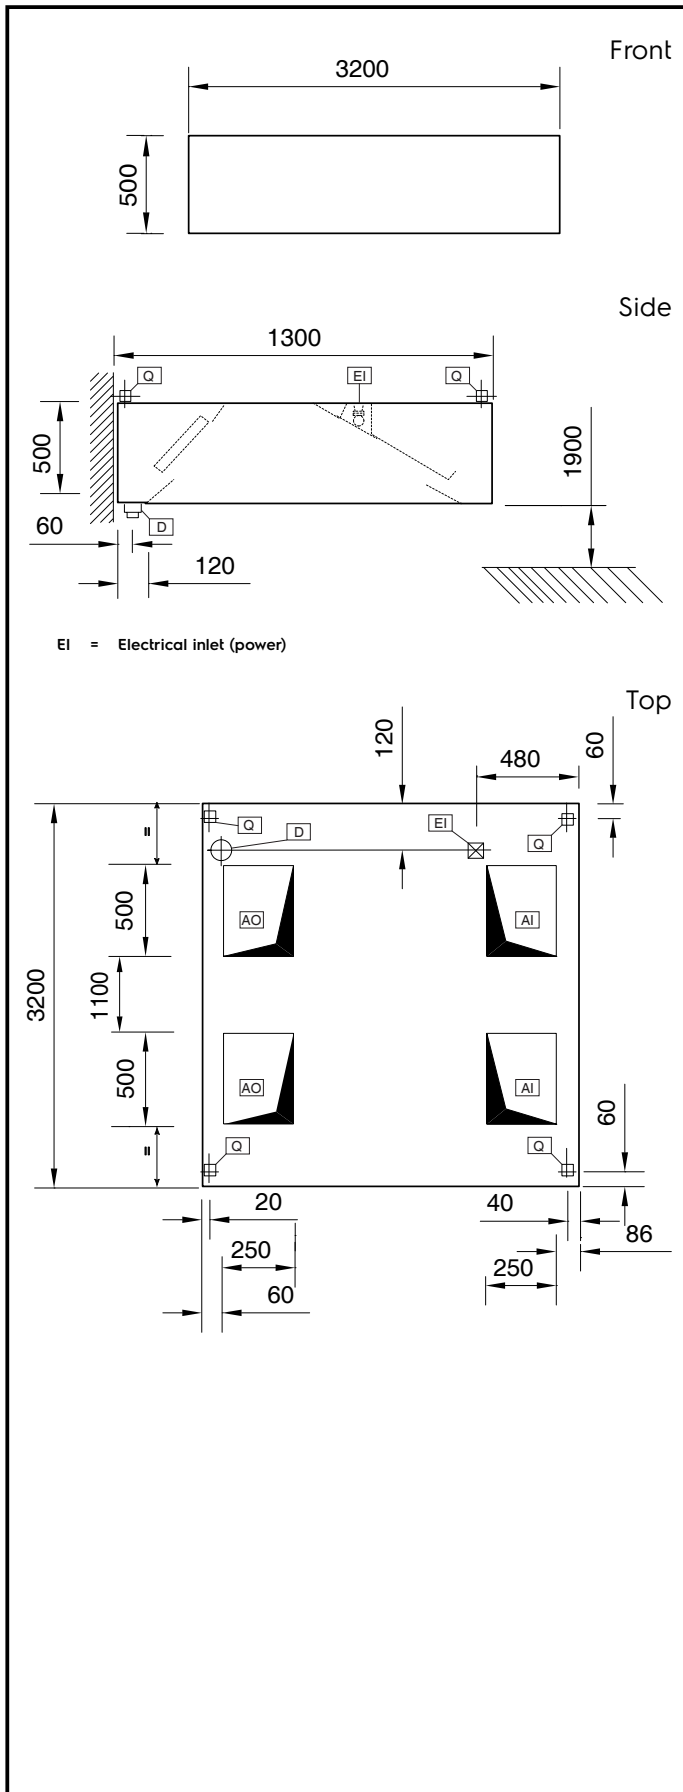

Electric

Supply voltage:

640231 (STPF1332)

220 V/1N ph/50 Hz

Total Watts:

0.24 kW

Capacity:

Supply capacity:

3000 m³/h

Key Information:

External dimensions, Width: 3200 mm

External dimensions, Depth: 1300 mm

External dimensions, Height: 500 mm

Net weight: 200 kg

Air Emission:

Air capacity:

4600 mc/h