
### Electrolux PROFESSIONAL

#### Ventilation Equipment 304 S\_S Wall Hood+Filters+Lamps 3600x1300mm

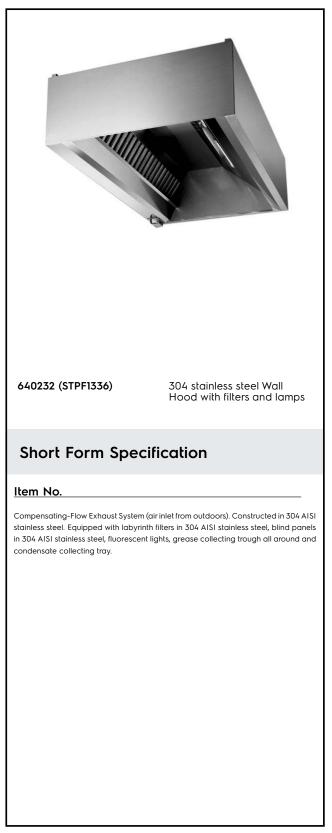

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		

#### Main Features


- External panels with upturned edges to avoid injuries.
- Heating and air conditioning costs reduced thanks to the compensated air flow.
- Low noise level.

#### Construction

- Outlet holes are sized in order to minimize drops in pressure.
- Labyrinth filters guarantee constant filtration to avoid clogging and to protect against fire.
- Perimetral gutter with drain hole to transfer grease into a 304 AISI container.
- 304 AISI stainless steel labyrinth filters easily removable for cleaning.
- Built-in lighting with protective screen.
- Optional accessory: air intake Plenum, which is insulated to avoid condensation.
- Rear exhaust with filters and front air intake through a narrow slot sized to obtain the correct induction effect.
- Perforated panel inside the intake circuit guarantees a perfect and uniform air distribution.
- Completely insulated intake area to avoid external condensation.
- Two separate air circuits (extraction and intake) to reduce the quantity of treated air released in the environment.
- Entirely constructed in 304 AISI stainless steel.

#### APPROVAL:

## **Electrolux PROFESSIONAL**

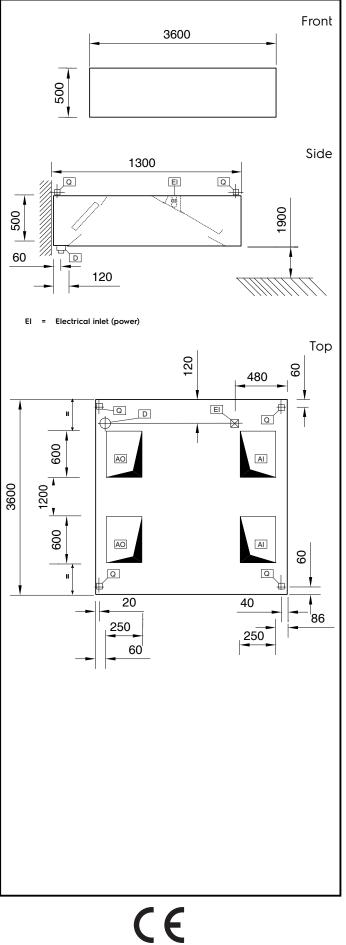

# Ventilation Equipment 304 S\_S Wall Hood+Filters+Lamps 3600x1300mm

Electric	
Supply voltage: 640232 (STPF1336) Total Watts:	220 V/1N ph/50 Hz 0.32 kW
Capacity:	
Supply capacity:	3360 m³/h
Key Information:	
External dimensions, Width: External dimensions, Depth: External dimensions, Height: Net weight:	3600 mm 1300 mm 500 mm 222 kg
Air Emission:	
Air capacity:	5200 mc/h

Ventilation Equipment 304 S\_S Wall Hood+Filters+Lamps 3600x1300mm The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.