



**Flexy Compact
Heated Plate Dispenser Trolley, 2
cylinders - Ø180-250 mm, 2 tray sliders,
h.750**

ITEM #
MODEL #
NAME #
SIS #
AIA #



322124 (F33HKW)

Heated Plate Dispenser
Trolley, double cylinder, tray
slider on both sides, plate
diameter 180-250 mm,
H=750

Main Features

- CB and CE certified by a third party notified body.
- Plate lowerator suitable to warm, transport and distribute plates.
- Sprung cylinders allow plates of different weights to be stacked.
- Perfect compact design makes it ideal for space saving environments.
- AISI 304 Tray slider in flush mounted stainless steel is installed on long sides and they can also be folded down to facilitate passage of the units through doorways.
- Ideal for servery lines without an operator.
- Two cylinders plate lowerator: each cylinder can accommodate plates up to 250 mm diameter.

Construction

- Sturdy construction with laminated panelings on 4 sides.
- Unit has 4 swivel castors, 2 with brakes.

Short Form Specification


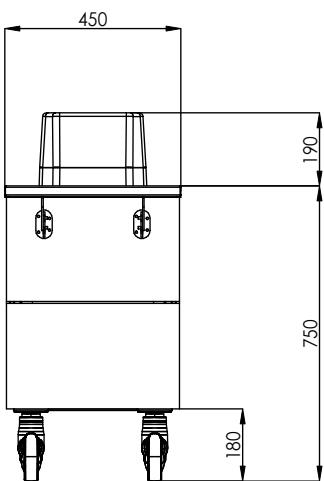
Item No.

Plate lowerator suitable to warm, transport and distribute plates. Two cylinders plate lowerator: each cylinder can accommodate plates up to 250 mm diameter. Unit has 4 swivel castors, two with brakes. Sturdy construction with laminated panelings on 4 sides. AISI 304 Tray slider in flush mounted stainless steel is installed on long sides and they can also be folded down to facilitate passage of the units through doorways.


APPROVAL:

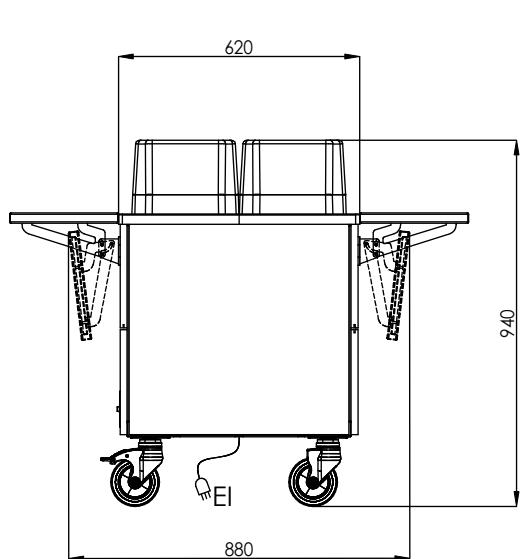

Experience the Excellence
www.electroluxprofessional.com


Front

Side

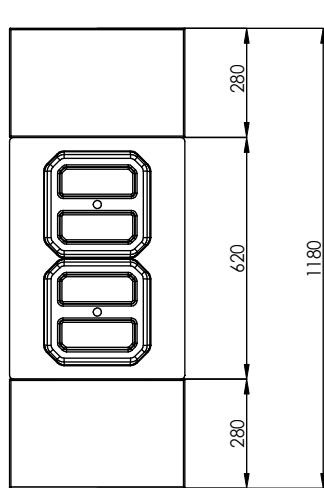EI = Electrical inlet (power)


Top
Electric
Supply voltage: 220-240 V/1N ph/50/60 Hz
Electrical power, max: 1.62 kW

Key Information:
External dimensions, Width: 1180 mm
External dimensions, Depth: 450 mm
External dimensions, Height: 940 mm
Net weight: 45 kg
Wheel material:
Wheel diameter: