

## Flexy Compact

### Heated Plate Dispenser Trolley, 2 cylinders - Ø180-250 mm, 2 tray sliders, h.900

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**322125 (F33HAW)**

Heated Plate Dispenser  
Trolley, double cylinder, tray  
slider on both sides, plate  
diameter 180-250 mm,  
H=900

### Short Form Specification

**Item No.** \_\_\_\_\_

Plate lowerator suitable to warm, transport and distribute plates.  
Two cylinders plate lowerator: each cylinder can accommodate  
up to 50 plates of 250 mm diameter. Unit has 4 swivel castors,  
two with brakes. Sturdy construction with laminated panelings  
on 4 sides. AISI 304 Tray slider in flush mounted stainless steel  
is installed on long sides and they can also be folded down to  
facilitate passage of the units through doorways.

### Main Features


- CB and CE certified by a third party notified body.
- Plate lowerator suitable to warm, transport and distribute plates.
- Sprung cylinders allow plates of different weights to be stacked.
- Perfect compact design makes it ideal for space saving environments.
- Two cylinders plate lowerator: each cylinder can accommodate up to 50 plates of 250 mm diameter.
- AISI 304 Tray slider in flush mounted stainless steel is installed on long sides and they can also be folded down to facilitate passage of the units through doorways.
- Ideal for servery lines without an operator.

### Construction


- Sturdy construction with laminated panelings on 4 sides.
- Unit has 4 swivel castors, 2 with brakes.

**APPROVAL:** \_\_\_\_\_

Front

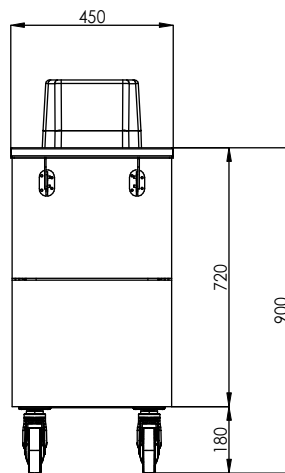


Side

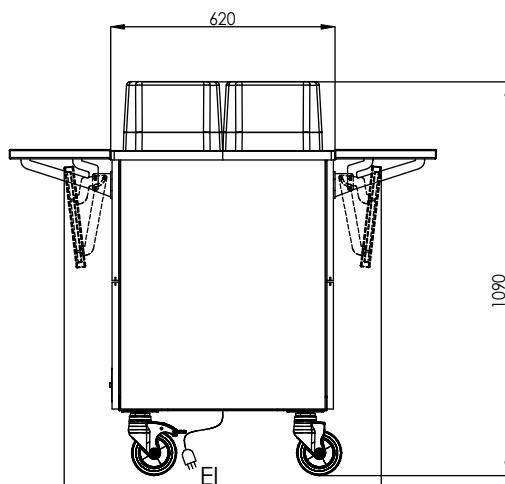

EI = Electrical inlet (power) 880

Top

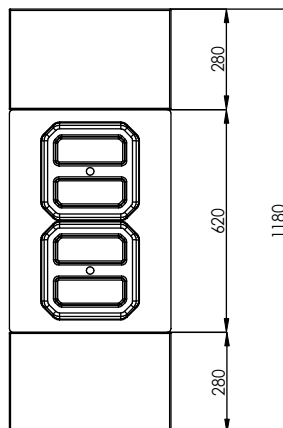

### Electric

Supply voltage: 220-240 V/1N ph/50/60 Hz  
 Electrical power, max: 1.62 kW

### Key Information:

External dimensions, Width: 1180 mm  
 External dimensions, Depth: 450 mm  
 External dimensions, Height: 1090 mm  
 Net weight: 59 kg  
 Wheel material:  
 Wheel diameter: