

Flexy Compact Plate Dispenser Trolley, 2 cylinders - Ø180-250 mm, 2 tray sliders, h.750

ITEM # _____
 MODEL # _____
 NAME # _____
 SIS # _____
 AIA # _____



322127 (F33NKW)

Plate Dispenser Trolley,
double cylinder, tray slider
on both sides, plate
diameter 180-250 mm,
H=750

Short Form Specification

Item No. _____

Neutral plate lowerator suitable to, transport and distribute plates. Two cylinders plate lowerator: each cylinder can accommodate plates up to 250 mm diameter. Unit has 4 swivel castors, two with brakes. Sturdy construction with laminated panelings on 4 sides. AISI 304 Tray slider in flush mounted stainless steel is installed on long sides and they can also be folded down to facilitate passage of the units through doorways.

Main Features

- CB and CE certified by a third party notified body.
- Sprung cylinders allow plates of different weights to be stacked.
- Perfect compact design makes it ideal for space saving environments.
- AISI 304 Tray slider in flush mounted stainless steel is installed on long sides and they can also be folded down to facilitate passage of the units through doorways.
- Ideal for servery lines without an operator.
- Neutral plate lowerator suitable to transport and distribute plates.
- Two cylinders plate lowerator: each cylinder can accommodate plates up to 250 mm diameter.

Construction

- Sturdy construction with laminated panelings on 4 sides.
- Unit has 4 swivel castors, 2 with brakes.


APPROVAL: _____




Electrolux
PROFESSIONAL

Flexy Compact Plate Dispenser Trolley, 2 cylinders - Ø180-250 mm, 2 tray sliders, h.750


Front

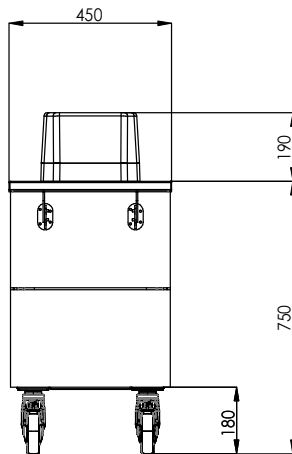

Side

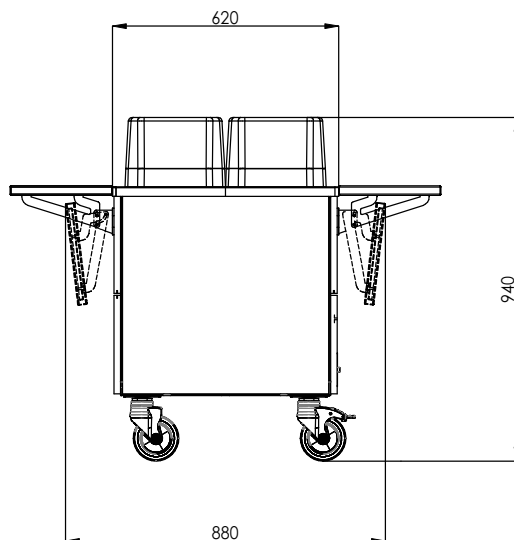

Top

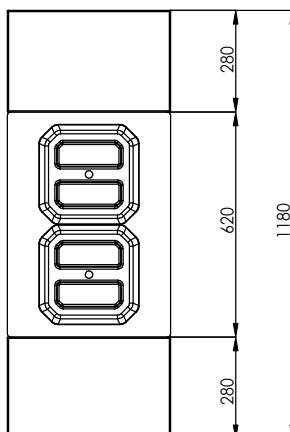

Key Information:

External dimensions, Width:	
322127 (F33NkW)	1180 mm
External dimensions, Depth:	450 mm
External dimensions, Height:	940 mm
Net weight:	45 kg
Wheel material:	
Wheel diameter:	

Flexy Compact
Plate Dispenser Trolley, 2 cylinders - Ø180-250 mm, 2 tray sliders, h.750

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.09.12