

## Drop-In Drop-in refrigerated well with refrigerated display, squared, medium service - 4 hours - 5GN

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



341063 (D15C5)

Drop-in refrigerated well  
with refrigerated display,  
squared, medium service - 4  
hours - (5 GN container  
capacity)

### Short Form Specification

#### Item No. \_\_\_\_\_

Designed to be positioned in flush installation providing improved cleanability and suitable for modern design installations. Designed to serve: Plates on the shelves and food in GN containers or food on plates/packages or bottles and cans thanks to adjustable bottom well. Suitable for GN 1/1 containers with a maximum height of 150 mm. Food introduced at the correct temperature maintains its core temperature according to Afnor Standards. Automatic defrosting guarantees evaporators clearance and efficient well cooling. Digital control with temperature display with precise adjustment (0,1°C). Fully compliant HACCP digital controls include visible alarms. Well equipped with adjustable bottom that can be set to 5 positions for each GN 1/1 section, independently one from the other to display different items with different heights. The temperature uniformity is guaranteed by powerful fans and high surface evaporator and air conveyors placed at the back of the shelves. Bottom part of well is removable for an easier access to the evaporator. Front grids and well bottom panels can be removed without the need of any tool for fast and effective cleaning. Well can be cleaned with a hose (after removing easily the fans). Includes three adjustable 8 mm thick tempered glass shelves that can be installed horizontally or inclined to better display dishes. Short sides, back sliding doors and the top

are in double glazed low emission glass (18 mm thick) to improve insulation avoiding formation of the condensation and reducing energy consumption. Equipped with self lifting curtain to reduce energy dispersion when the unit is not in use. Equipped with two sliding doors on the operator side with hold function allowing easy fill-up auto close function in order to ensure the doors always remain closed when not in use. The display is illuminated by inside LED light under each glass shelf that emphasizes the cold food colors. The air circulation has been studied in order to guarantee temperature uniformity in every and each section of the well and shelves. Designed for extra increased visibility on the shelves for charming food display. Closed on customer side or flaps on customer side options are available. Wells in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole. High-density expanded polyurethane foam with cyclopentane guarantees excellent well insulation to reduce energy dispersion. R290 refrigerant gas (GWP=3) to reduce environmental impact and increase cooling efficiency.

APPROVAL: \_\_\_\_\_



## Main Features

- Designed to be positioned in flush installation providing improved cleanability and suitable for modern design installations.
- Precise temperature control and setting at 0,1°C .
- As standard the product comes with digitally controlled thermostat which is in line of HACCP norms and provides visual alarm as a warning of the increasing or decreasing temperatures.
- Food introduced at the correct temperature maintains its core temperature according to Afnor Standards.
- Automatic defrosting guarantees evaporators clearance and efficient well cooling.
- Remote version is available.
- Bottom part of well is removable for an easier access to the evaporator.
- Suitable for GN 1/1 containers with a maximum height of 150 mm.
- Available drop-in dimensions: 2, 3, 4, 5 GN.
- Well equipped with adjustable bottom that can be set to 5 positions for each GN 1/1 section, independently one from the other to display different items with different heights.
- Front grids and well bottom panels can be removed without the need of any tool for fast and effective cleaning.
- Well can be cleaned with a hose (after removing easily the fans).
- Designed to serve: plates on the shelves and food in GN containers or food on plates/packages or bottles and cans thanks to adjustable bottom well.
- The temperature uniformity is guaranteed by powerful fans and high surface evaporator and air conveyors placed at the back of the shelves.
- The display is illuminated by inside LED light under each glass shelf that emphasizes the cold food colors.
- Includes three adjustable 8 mm thick tempered glass shelves that can be installed horizontally or inclined to better display dishes.
- Equipped with two sliding doors on the operator side with hold function allowing easy fill-up auto close function in order to ensure the doors always remain closed when not in use.
- The air circulation has been studied in order to guarantee temperature uniformity in every and each section of the well and shelves.
- Designed for extra increased visibility on the shelves for charming food display.
- Closed on customer side or flaps on customer side options are available.
- CB and CE certified by a third party notified body.

## Construction

- Electronic control with temperature display.
- Well bottom is inclined to facilitate water drainage.
- Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole.
- IPx2 water protection.

## Sustainability



- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High-density expanded polyurethane foam with



**Electrolux**  
PROFESSIONAL

**Drop-In**  
**Drop-in refrigerated well with refrigerated**  
**display, squared, medium service - 4 hours -**  
**5GN**

cyclopentane guarantees excellent well insulation to reduce energy dispersion.

- Short sides, back sliding doors and the top are in double glazed low emission glass (18 mm thick) to improve insulation avoiding formation of the condensation and reducing energy consumption.
- Equipped with self lifting curtain to reduce energy dispersion when the unit is not in use.



**Drop-In**  
**Drop-in refrigerated well with refrigerated display, squared, medium**  
**service - 4 hours - 5GN**  
The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.


2025.09.16




**Electrolux**  
PROFESSIONAL

**Drop-In**  
Drop-in refrigerated well with refrigerated  
display, squared, medium service - 4 hours -  
5GN

Rear side

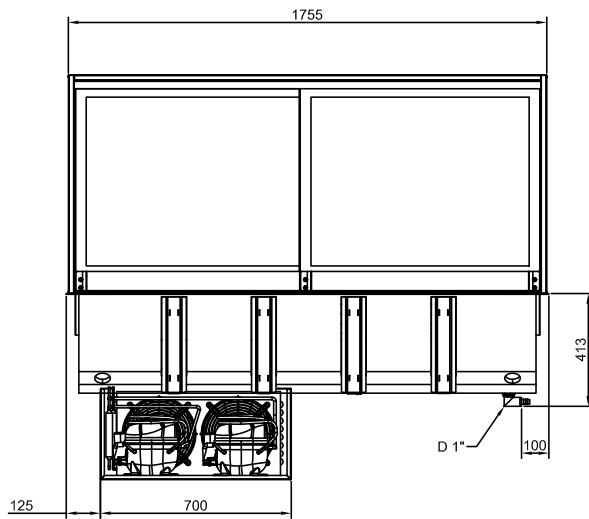


Side

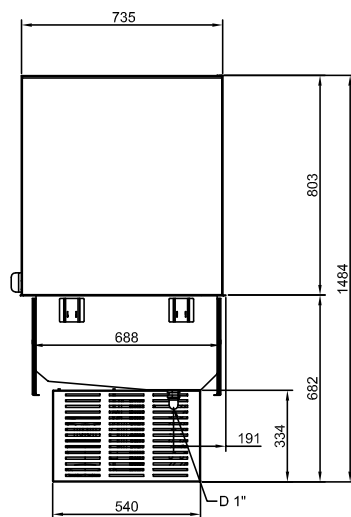

D = Drain  
EI = Electrical inlet (power)

Top

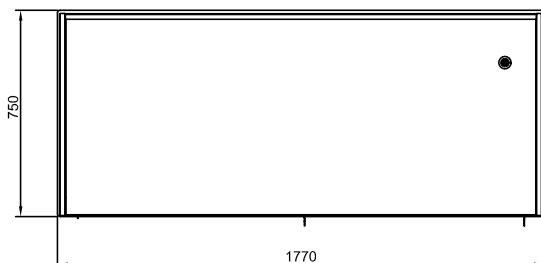

**Drop-In**  
Drop-in refrigerated well with refrigerated display, squared, medium  
service - 4 hours - 5GN  
The company reserves the right to make modifications to the products  
without prior notice. All information correct at time of printing.

2025.09.16



**Electrolux**  
PROFESSIONAL

**Drop-In**  
Drop-in refrigerated well with refrigerated  
display, squared, medium service - 4 hours -  
5GN

### Electric

Supply voltage: 220-240 V/1N ph/50 Hz  
Electrical power, max: 1.3 kW

### Water:

Drain line size: 1"  
Water drain outlet size: 1"

### Key Information:

External dimensions,  
Width: 1770 mm  
External dimensions,  
Depth: 750 mm  
External dimensions,  
Height: 1510 mm  
Net weight: 253.6 kg  
Shipping weight: 380 kg  
Shipping height: 1720 mm  
Shipping width: 1200 mm  
Shipping depth: 1820 mm  
Shipping volume: 3.76 m<sup>3</sup>  
Set temperature: +4 / +8 °C

### Refrigeration Data

Refrigerant type: R290


### Sustainability

Noise level: 62 dBA




**Drop-In**  
Drop-in refrigerated well with refrigerated display, squared, medium  
service - 4 hours - 5GN  
The company reserves the right to make modifications to the products  
without prior notice. All information correct at time of printing.


2025.09.16

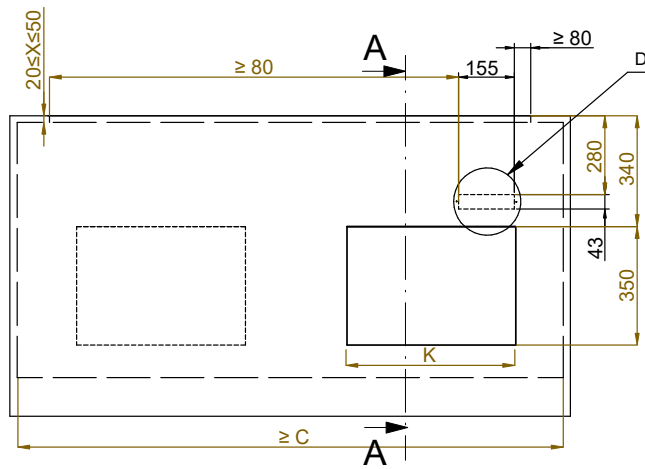


Front view  
Scala: 1:10




Dettaglio D  
Scala 1:7



Dettaglio B  
Scala 1:2

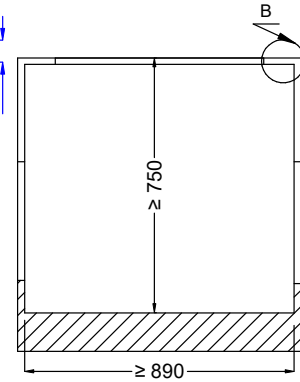



Section Cut A-A  
Scala: 1:10

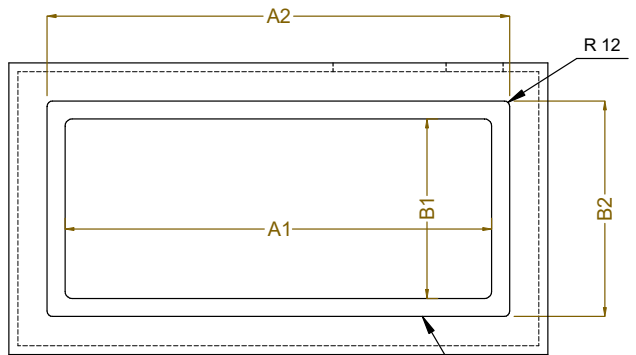

Top view  
Scala: 1:20

ONLY FOR FLUSH  
INSTALLATION

| CAPACITY | CUTOUT |     | LOWERING<br>FOR FLUSH<br>INSTALLATION |     | C    | K   |
|----------|--------|-----|---------------------------------------|-----|------|-----|
|          | A1     | B1  | A2                                    | B2  |      |     |
| 2GN      | 740    | 710 | 804                                   | 754 | 920  | 470 |
| 3GN      | 1060   |     | 1124                                  |     | 1250 |     |
| 4GN      | 1390   |     | 1454                                  |     | 1580 |     |
| 5GN      | 1710   |     | 1774                                  |     | 1900 | 730 |

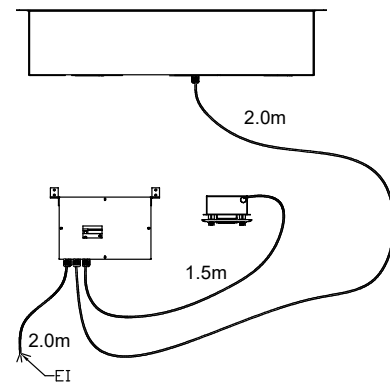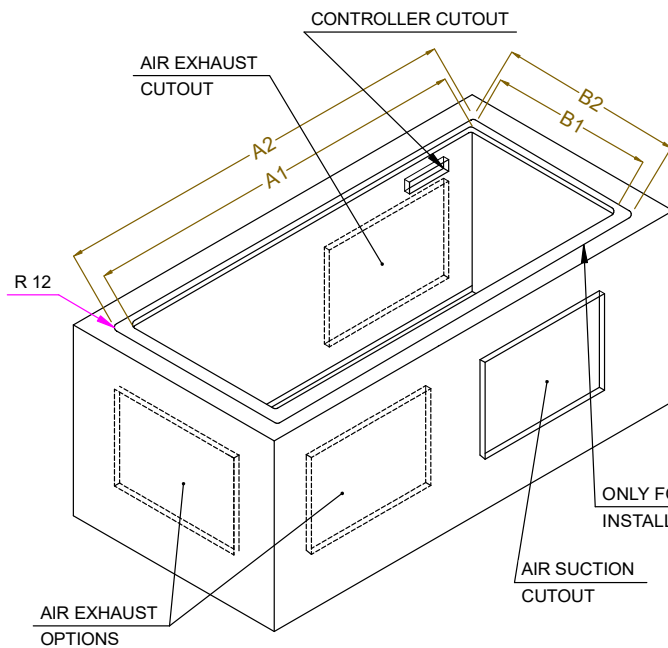

595T01V00 - COLD DISPLAY 4HRS