

## Drop-In

### Drop-in remote refrigerated well, static (5 GN container capacity)

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



341091 (D10R5)

Drop-in remote refrigerated well, static (5 GN container capacity)

### Short Form Specification

#### Item No. \_\_\_\_\_

Designed to be positioned in flush installation providing improved cleanability and suitable for modern design installations. Designed to serve the food in gastronorm containers with a maximum height of 200mm. Food introduced at the correct temperature maintains its core temperature according to Afnor Standards. Automatic defrosting guarantees evaporators clearance and efficient well cooling. Digital control with temperature display with precise adjustment (0,1°C). Fully compliant HACCP digital controls include visible alarms. Wells in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole. High-density expanded polyurethane foam with cyclopentane guarantees excellent well insulation to reduce energy dispersion. The bottom is equipped with copper tubes to ensure proper cooling, with this system the air touches the cold surface and gets cooled. Preadjusted connection to remote cooling unit (not included). Refrigerant type R452a other gases are available on request.

### Main Features

- Preadjusted connection to remote cooling unit (not included).
- CB and CE certified by a third party notified body.
- Designed to be positioned in flush installation providing improved cleanability and suitable for modern design installations.
- Designed to serve the food in gastronorm containers.
- Suitable for GN 1/1 containers with a maximum height of 200 mm.
- Precise temperature control and setting at 0,1°C .
- As standard the product comes with digitally controlled thermostat which is in line of HACCP norms and provides visual alarm as a warning of the increasing or decreasing temperatures.
- Available drop-in dimensions: 1, 2, 3, 4, 5, 6 GN.
- Food introduced at the correct temperature maintains its core temperature according to Afnor Standards.
- Automatic defrosting guarantees evaporators clearance and efficient well cooling.
- Built-in cooling unit version is available.

### Construction

- Well bottom is inclined to facilitate water drainage.
- Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole.
- Electronic control with temperature display.
- IPx2 water protection.
- The bottom is equipped with copper tubes to ensure proper cooling, with this system the air touches the cold surface and gets cooled.

### Sustainability

- High-density expanded polyurethane foam with cyclopentane guarantees excellent well insulation to reduce energy dispersion.




APPROVAL: \_\_\_\_\_




**Electrolux**  
PROFESSIONAL

## Drop-In Drop-in remote refrigerated well, static (5 GN container capacity)

Front

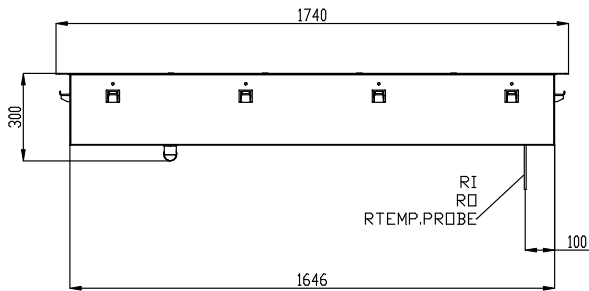


Side

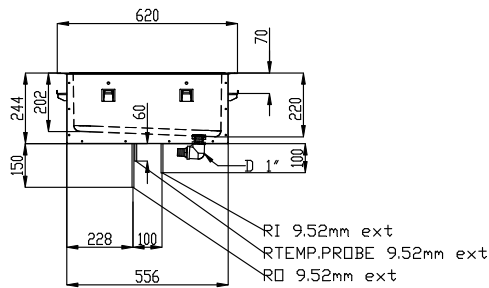

- D = Drain  
EI = Electrical inlet (power)  
RI = Refrigerant Inlet

Top

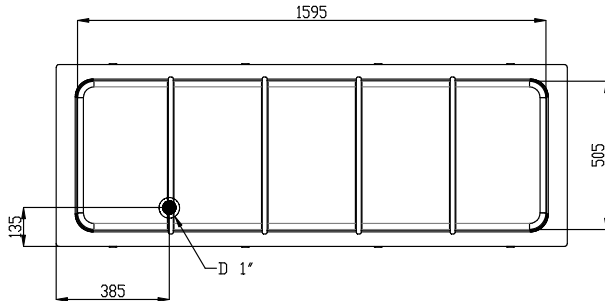

Drop-In  
Drop-in remote refrigerated well, static (5 GN container capacity)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.08.06

**Electric**

Supply voltage: 220-240 V/1N ph/50 Hz  
Electrical power, max: 0.02 kW

**Water:**

Water drain outlet size: 1"

**Key Information:**


External dimensions,  
Width: 1740 mm  
External dimensions,  
Depth: 620 mm  
External dimensions,  
Height: 260 mm  
Net weight: 43.4 kg  
Shipping weight: 65.8 kg  
Shipping height: 380 mm  
Shipping width: 660 mm  
Shipping depth: 1780 mm  
Shipping volume: 0.45 m<sup>3</sup>  
Set temperature: -15 / 0 °C

**Refrigeration Data**



Refrigerant type: R452A  
Connection pipes (remote)  
- outlet: 12.7 mm  
Connection pipes (remote)  
- inlet: 9.52 mm

**Sustainability**

Noise level: 0 dBA

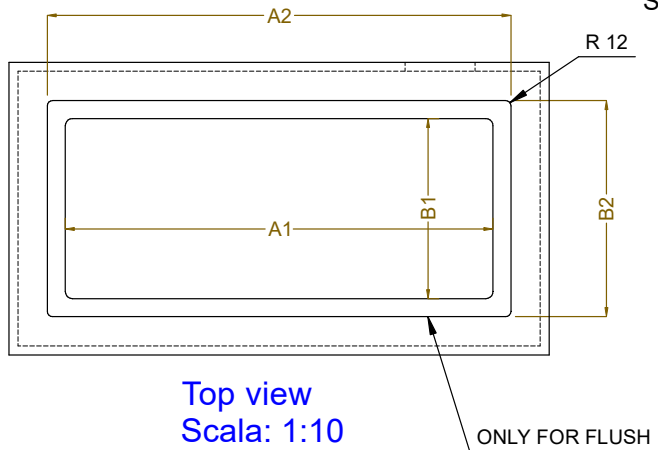

| CAPACITY | CUTOUT |      | LOWERING FOR FLUSH INSTALLATION |      | C    |
|----------|--------|------|---------------------------------|------|------|
|          | A1     | B1   | A2                              | B2   |      |
| 1GN      | 380    | 580  | 454                             | 624  | 560  |
| 2GN      | 700    |      | 774                             |      | 880  |
| 3GN      | 1030   |      | 1104                            |      | 1200 |
| 4GN      | 1350   |      | 1424                            |      | 1530 |
| 5GN      | 1670   | 2074 | 1744                            | 2180 | 1850 |
| 6GN      | 2000   |      | 2074                            |      | 2180 |

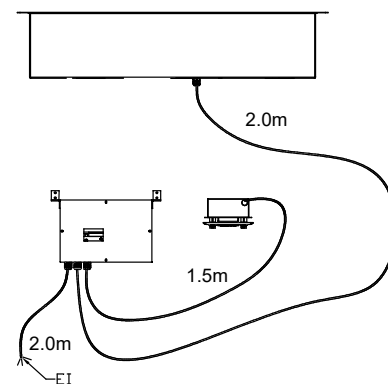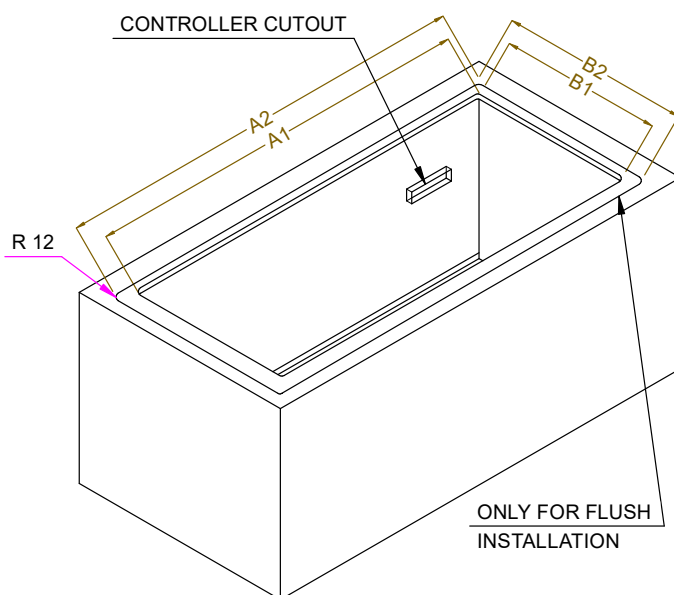

595T02100 - COLD STATIC WELL REM.