

## Drop-In

### Drop-in remote refrigerated well, ventilated, 1 refrigerated shelf and 1 neutral shelf - 5GN

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**341107 (D13R5)**

Drop-in remote refrigerated well, ventilated, with 1 refrigerated shelf and 1 neutral shelf (5 GN container capacity)

### Short Form Specification

#### Item No. \_\_\_\_\_

Designed to be positioned in flush installation providing improved cleanability and suitable for modern design installations. Designed to serve: food in GN containers or food on plates/packages or bottles and cans thanks to adjustable bottom well. Suitable for GN 1/1 containers with a maximum height of 150 mm. Food introduced at the correct temperature maintains its core temperature according to Afnor Standards. Automatic defrosting guarantees evaporators clearance and efficient well cooling. Digital control with temperature display with precise adjustment (0,1°C). Fully compliant HACCP digital controls include visible alarms. Well equipped with adjustable bottom that can be set to 5 positions for each GN 1/1 section, independently one from the other to display different items with different heights. The temperature uniformity is guaranteed by powerful fans and high surface evaporator. Bottom part of well is removable for an easier access to the evaporator. Front grids and well bottom panels can be removed without the need of any tool for fast and effective cleaning. Well can be cleaned with a hose (after removing easily the fans). Includes an adjustable tempered glass shelf that can allocate dishes, a neutral shelf on the top and a bottom well divided in GN1/1 adjustable sections. Wells in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole. High-density expanded polyurethane foam with cyclopentane guarantees excellent well insulation to reduce energy dispersion. Preadjusted connection to remote cooling unit (not included). Refrigerant type R452a other gases are available on request.

### Main Features

- Bottom part of well is removable for an easier access to the evaporator.
- Preadjusted connection to remote cooling unit (not included).
- Suitable for GN 1/1 containers with a maximum height of 150 mm.
- CB and CE certified by a third party notified body.
- Designed to be positioned in flush installation providing improved cleanability and suitable for modern design installations.
- Precise temperature control and setting at 0,1°C .
- As standard the product comes with digitally controlled thermostat which is in line of HACCP norms and provides visual alarm as a warning of the increasing or decreasing temperatures.
- Food introduced at the correct temperature maintains its core temperature according to Afnor Standards.
- Automatic defrosting guarantees evaporators clearance and efficient well cooling.
- Designed to serve: food in GN containers or food on plates/packages or bottles and cans thanks to adjustable bottom well.
- Available drop-in dimensions: 2, 3, 4, 5 GN.
- Well equipped with adjustable bottom that can be set to 5 positions for each GN 1/1 section, independently one from the other to display different items with different heights.
- The temperature uniformity is guaranteed by powerful fans and high surface evaporator.
- Front grids and well bottom panels can be removed without the need of any tool for fast and effective cleaning.
- Well can be cleaned with a hose (after removing easily the fans).
- Includes an adjustable tempered glass shelf that can allocate dishes, a neutral shelf on the top and a bottom well divided in GN1/1 adjustable sections. Each section can be set to 5 positions independently one from the other to display different items with different heights.
- Ideal for displaying food and drinks with an elevation.
- Built-in cooling unit version is available.

### Construction

- Well bottom is inclined to facilitate water drainage.
- Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole.
- Electronic control with temperature display.
- IPx2 water protection.

### Sustainability

- High-density expanded polyurethane foam with cyclopentane guarantees excellent well insulation to reduce energy dispersion.




**APPROVAL:** \_\_\_\_\_




**Electrolux**  
PROFESSIONAL

**Drop-In**  
**Drop-in remote refrigerated well, ventilated,**  
**1 refrigerated shelf and 1 neutral shelf - 5GN**

Rear side

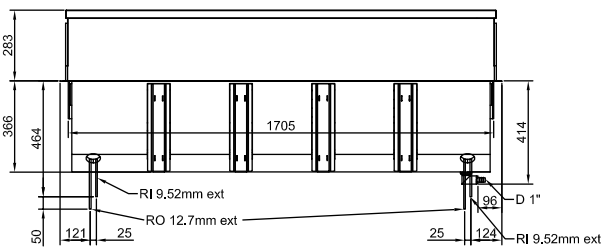


Side



- D = Drain  
EI = Electrical inlet (power)  
RI = Refrigerant Inlet

Top

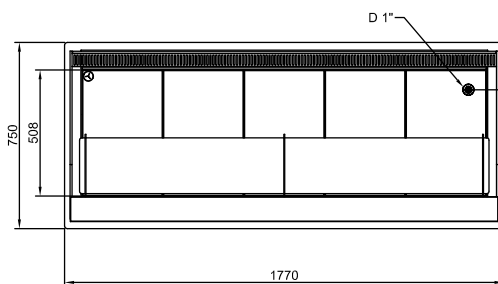

**Drop-In**  
**Drop-in remote refrigerated well, ventilated, 1 refrigerated shelf and 1**  
**neutral shelf - 5GN**  
The company reserves the right to make modifications to the products  
without prior notice. All information correct at time of printing.

**Electric**

Supply voltage: 220-240 V/1N ph/50 Hz  
Electrical power, max: 0.12 kW

**Water:**

Water drain outlet size: 1"

**Key Information:**

External dimensions,  
Width: 1770 mm  
External dimensions,  
Depth: 750 mm  
External dimensions,  
Height: 670 mm  
Net weight: 101.6 kg  
Shipping weight: 131.6 kg  
Shipping height: 790 mm  
Shipping width: 790 mm  
Shipping depth: 1810 mm  
Shipping volume: 1.13 m<sup>3</sup>  
Set temperature: +4 / +8 °C

**Refrigeration Data**


Refrigerant type: R452A  
Connection pipes (remote)  
- outlet: 12.7 mm  
Connection pipes (remote)  
- inlet: 9.52 mm

**Sustainability**


Noise level: 0 dBA



Front view  
Scala: 1:10




Dettaglio D  
Scala 1:7




Section Cut A-A  
Scala: 1:10

ONLY FOR FLUSH  
INSTALLATION




Dettaglio B  
Scala 1:2

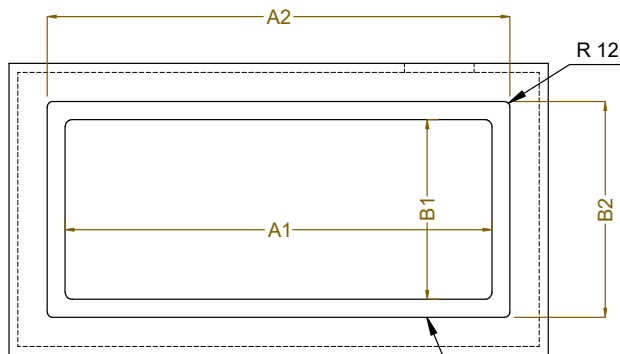


Top view  
Scala: 1:10

ONLY FOR FLUSH  
INSTALLATION

| CAPACITY | CUTOUT |     | LOWERING<br>FOR FLUSH<br>INSTALLATION |     | C    |
|----------|--------|-----|---------------------------------------|-----|------|
|          | A1     | B1  | A2                                    | B2  |      |
| 2GN      | 740    | 710 | 804                                   | 754 | 920  |
| 3GN      | 1060   |     | 1124                                  |     | 1250 |
| 4GN      | 1390   |     | 1454                                  |     | 1580 |
| 5GN      | 1710   |     | 1774                                  |     | 1900 |

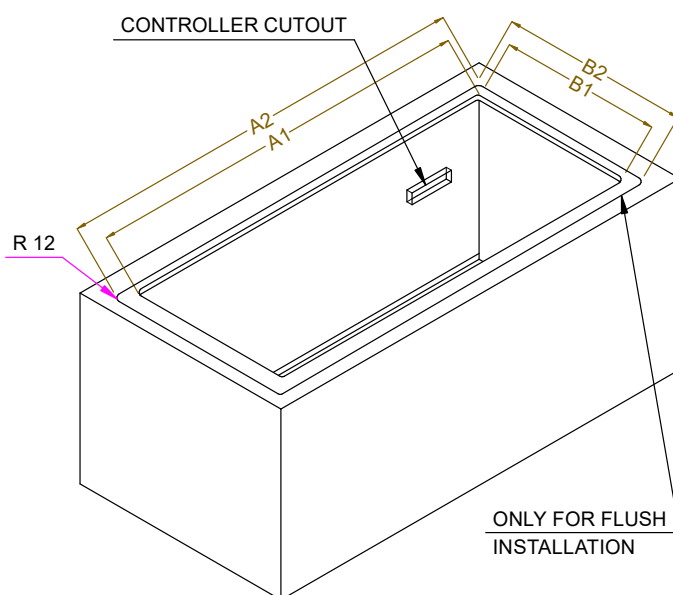

ONLY FOR FLUSH  
INSTALLATION

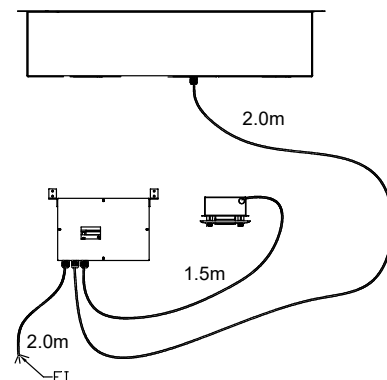

595T02500 - COLD VENT. WELL 2 LEVELS REM.