

## Drop-In Drop-in bain-marie, with one well (2 GN container capacity) and A overshelf

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**341162 (D01C2)**

 Drop-in Bain-Marie, with  
 one well (2 GN container  
 capacity) with one A type  
 overshelf and halogen lamp

### Short Form Specification

**Item No.** \_\_\_\_\_

Designed to serve the food in gastronorm containers. Suitable for GN 1/1 containers with a maximum height of 200 mm. Automatic water refill guarantees constant heating performances and prevent unit breakage. Etched foil heating elements to maximize heat transmission for reduced warm-up times. Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole. 19mm thick rock wool isolated with galvanize sheet guarantees excellent well insulation to reduce energy dispersion. Stylish A type overshelf designed for extra increased visibility on the surface for charming food display. Overshelf equipped with hot halogen lamps.

### Main Features

- Electronic overheating protection.
- Designed to serve the food in gastronorm containers.
- Suitable for GN 1/1 containers with a maximum height of 200 mm.
- Automatic water refill guarantees constant heating performances and prevent unit breakage.
- Precise temperature control and setting at 0,1°C .
- As standard the product comes with digitally controlled thermostat which is in line of HACCP norms and provides visual alarm as a warning of the increasing or decreasing temperatures.
- Designed to work with both hot and cold inlet water.
- It is possible to transform one of the GNs to soup dispenser with the available accessory.
- CB and CE certified by a third party notified body.
- Food introduced at the correct temperature maintains its core temperature according to Afnor Standards.
- Stylish A type overshelf designed for extra increased visibility on the surface for charming food display.
- Overshelf equipped with hot halogen lamps.
- Designed to be positioned in flush installation providing improved cleanability and suitable for modern design installations.

### Construction

- Heating elements connected to the well bottom include safety thermostat.
- Well bottom is inclined to facilitate water drainage.
- IPx4 water protection.
- Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole.
- Electronic control with temperature display.
- Overshelf in complete AISI 304.

### Sustainability


**APPROVAL:** \_\_\_\_\_


- 19mm thick rock wool isolated with galvanize sheet guarantees excellent well insulation to reduce energy dispersion.
- Etched foil heating elements to maximize heat transmission for reduced warm-up times.




**Electrolux**  
PROFESSIONAL

## Drop-In Drop-in bain-marie, with one well (2 GN container capacity) and A overself

Front

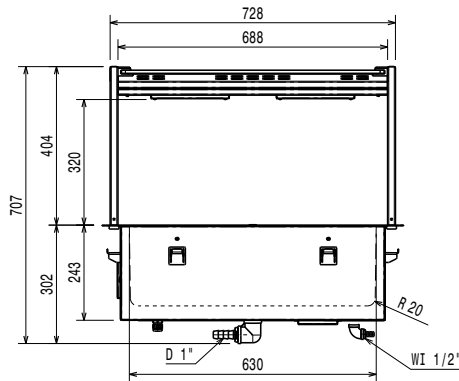


Side

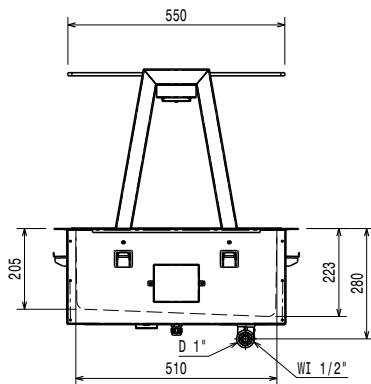

D = Drain  
EI = Electrical inlet (power)  
WI = Water inlet

Top

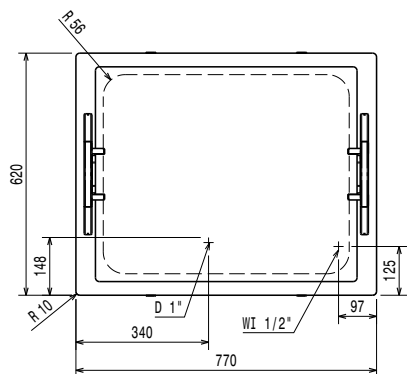

### Electric

Supply voltage: 220-240 V/1N ph/50/60 Hz  
Electrical power, max: 2.02 kW

### Water:

Drain line size: 1"  
Water inlet "CW" connection: 1/2"

### Key Information:

External dimensions, Width: 770 mm  
External dimensions, Depth: 620 mm  
External dimensions, Height: 664 mm  
Net weight: 37.36 kg  
Shipping weight: 61 kg  
Shipping height: 1230 mm  
Shipping width: 660 mm  
Shipping depth: 810 mm  
Shipping volume: 0.66 m<sup>3</sup>  
Set temperature: +85 / +95 °C




### Sustainability

Noise level:



Drop-In  
Drop-in bain-marie, with one well (2 GN container capacity) and A  
overself  
The company reserves the right to make modifications to the products  
without prior notice. All information correct at time of printing.

2025.09.05

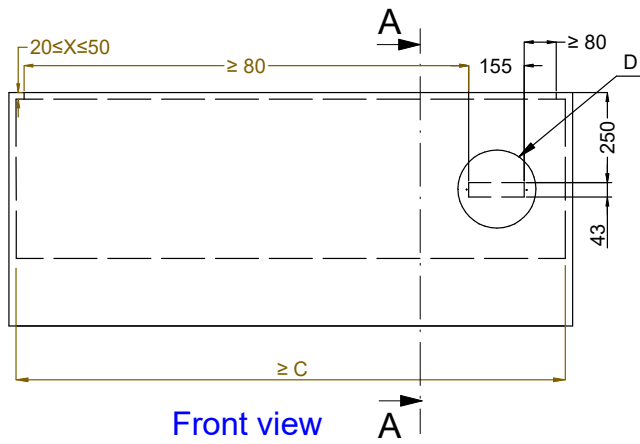

| CAPACITY | CUTOUT |     | LOWERING<br>FOR FLUSH<br>INSTALLATION |     | C    |
|----------|--------|-----|---------------------------------------|-----|------|
|          | A1     | B1  | A2                                    | B2  |      |
| 2GN      | 740    | 580 | 774                                   | 624 | 880  |
| 3GN      | 1070   |     | 1104                                  |     | 1200 |
| 4GN      | 1390   |     | 1424                                  |     | 1530 |



595T03500 - WATER BAIN MARIE SINGLE WELL OVERSH. ON THE FRAME