



Drop-In Drop-in bain-marie, with one well (2 GN container capacity) and A overshell



341162 (D01C2)

Drop-in Bain-marie, with
one well (2 GN container
capacity) with one A type
overshell with hot lamps

Short Form Specification

Item No.

Designed to serve the food in gastronorm containers. Suitable for GN 1/1 containers with a maximum height of 200 mm. Automatic water refill guarantees constant heating performances and prevent unit breakage. Etched foil heating elements to maximize heat transmission for reduced warm-up times. Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole. 19mm thick rock wool isolated with galvanize sheet guarantees excellent well insulation to reduce energy dispersion. Stylish A type overshell designed for extra increased visibility on the surface for charming food display. Overshell equipped with hot halogen lamps.

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____

Main Features

- Electronic overheating protection.
- Designed to serve the food in gastronorm containers.
- Suitable for GN 1/1 containers with a maximum height of 200 mm.
- Automatic water refill guarantees constant heating performances and prevent unit breakage.
- Precise temperature control and setting at 0,1°C .
- As standard the product comes with digitally controlled thermostat which is in line of HACCP norms and provides visual alarm as a warning of the increasing or decreasing temperatures.
- Designed to work with both hot and cold inlet water.
- It is possible to transform one of the GNs to soup dispenser with the available accessory.
- CB and CE certified by a third party notified body.
- Food introduced at the correct temperature maintains its core temperature according to Afnor Standards.
- Stylish A type overshell designed for extra increased visibility on the surface for charming food display.
- Overshell equipped with hot halogen lamps.
- Designed to be positioned in flush installation providing improved cleanability and suitable for modern design installations.

Construction

- Heating elements connected to the well bottom include safety thermostat.
- Well bottom is inclined to facilitate water drainage.
- IPX4 water protection.
- Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole.
- Electronic control with temperature display.
- Overshell in complete AISI 304.

Sustainability



APPROVAL: _____






Experience the Excellence
www.electroluxprofessional.com



Drop-In
Drop-in bain-marie, with one well (2 GN container capacity) and A overshelf

- 19mm thick rock wool isolated with galvanize sheet guarantees excellent well insulation to reduce energy dispersion.
- Etched foil heating elements to maximize heat transmission for reduced warm-up times.

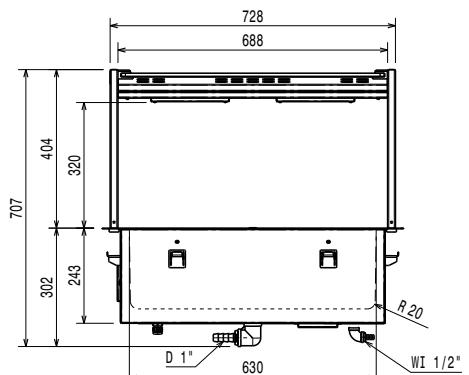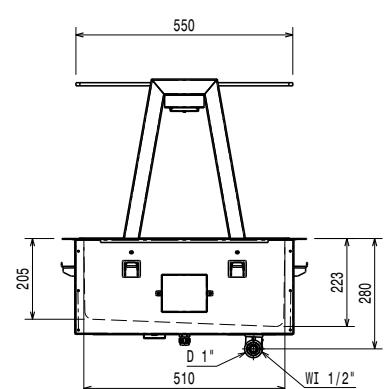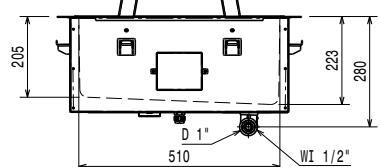
Front

Side

Top

D = Drain
EI = Electrical inlet (power)
WI = Water inlet

Electric

Supply voltage: 220-240 V/1N ph/50/60 Hz
Electrical power, max: 2.02 kW

Water:






Drain line size: 1"
Water inlet "CW" connection: 1/2"

Key Information:

External dimensions, Width: 770 mm
External dimensions, Depth: 620 mm
External dimensions, Height: 664 mm
Net weight: 37.36 kg
Shipping weight: 61 kg
Shipping height: 1230 mm
Shipping width: 660 mm
Shipping depth: 810 mm
Shipping volume: 0.66 m³
Set temperature: +85 / +95 °C

Sustainability



Noise level:

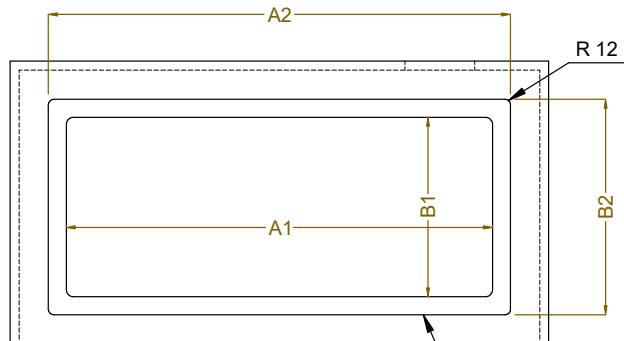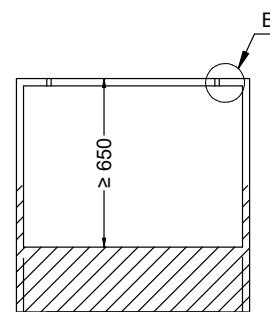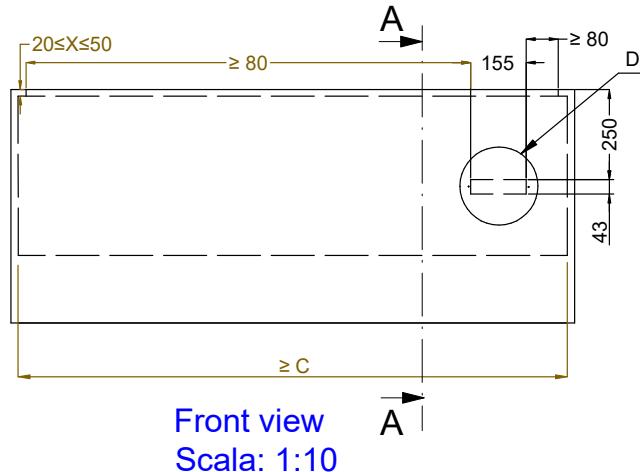

| CAPACITY | CUTOUT | | LOWERUNG FOR FLUSH INSTALLATION | | C |
|----------|--------|-----|---------------------------------|-----|------|
| | A1 | B1 | A2 | B2 | |
| 2GN | 740 | | 774 | | 880 |
| 3GN | 1070 | 580 | 1104 | 624 | 1200 |
| 4GN | 1390 | | 1424 | | 1530 |

Top view
Scala: 1:10

ONLY FOR FLUSH
INSTALLATION

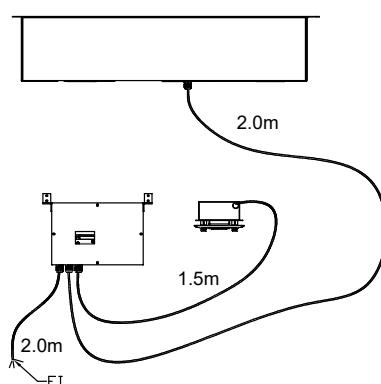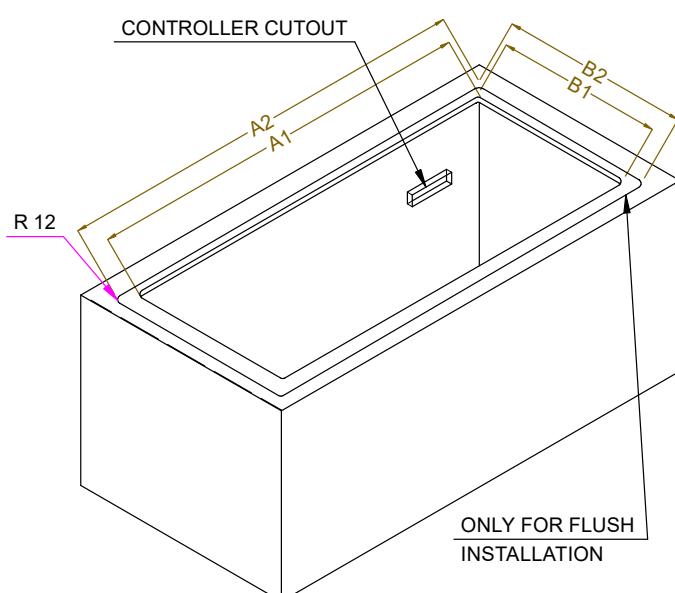

595T03500 - WATER BAIN MARIE SINGLE WELL OVERSH. ON THE FRAME