



## Drop-In Drop-in bain-marie, with one well (4 GN container capacity) and A overshell



341164 (D01C4)

Drop-in Bain-marie, with  
one well (4 GN container  
capacity) with one A type  
overshell with hot lamps

### Short Form Specification

#### Item No.

Designed to serve the food in gastronorm containers. Suitable for GN 1/1 containers with a maximum height of 200 mm. Automatic water refill guarantees constant heating performances and prevent unit breakage. Etched foil heating elements to maximize heat transmission for reduced warm-up times. Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole. 19mm thick rock wool isolated with galvanize sheet guarantees excellent well insulation to reduce energy dispersion. Stylish A type overshelf designed for extra increased visibility on the surface for charming food display. Overshell equipped with hot halogen lamps.

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_

### Main Features

- Electronic overheating protection.
- Designed to serve the food in gastronorm containers.
- Suitable for GN 1/1 containers with a maximum height of 200 mm.
- Automatic water refill guarantees constant heating performances and prevent unit breakage.
- Precise temperature control and setting at 0,1°C .
- As standard the product comes with digitally controlled thermostat which is in line of HACCP norms and provides visual alarm as a warning of the increasing or decreasing temperatures.
- Designed to work with both hot and cold inlet water.
- It is possible to transform one of the GNs to soup dispenser with the available accessory.
- CB and CE certified by a third party notified body.
- Food introduced at the correct temperature maintains its core temperature according to Afnor Standards.
- Stylish A type overshelf designed for extra increased visibility on the surface for charming food display.
- Overshell equipped with hot halogen lamps.
- Designed to be positioned in flush installation providing improved cleanability and suitable for modern design installations.

### Construction

- Heating elements connected to the well bottom include safety thermostat.
- Well bottom is inclined to facilitate water drainage.
- IPx4 water protection.
- Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole.
- Electronic control with temperature display.
- Overshell in complete AISI 304.

### Sustainability



APPROVAL: \_\_\_\_\_

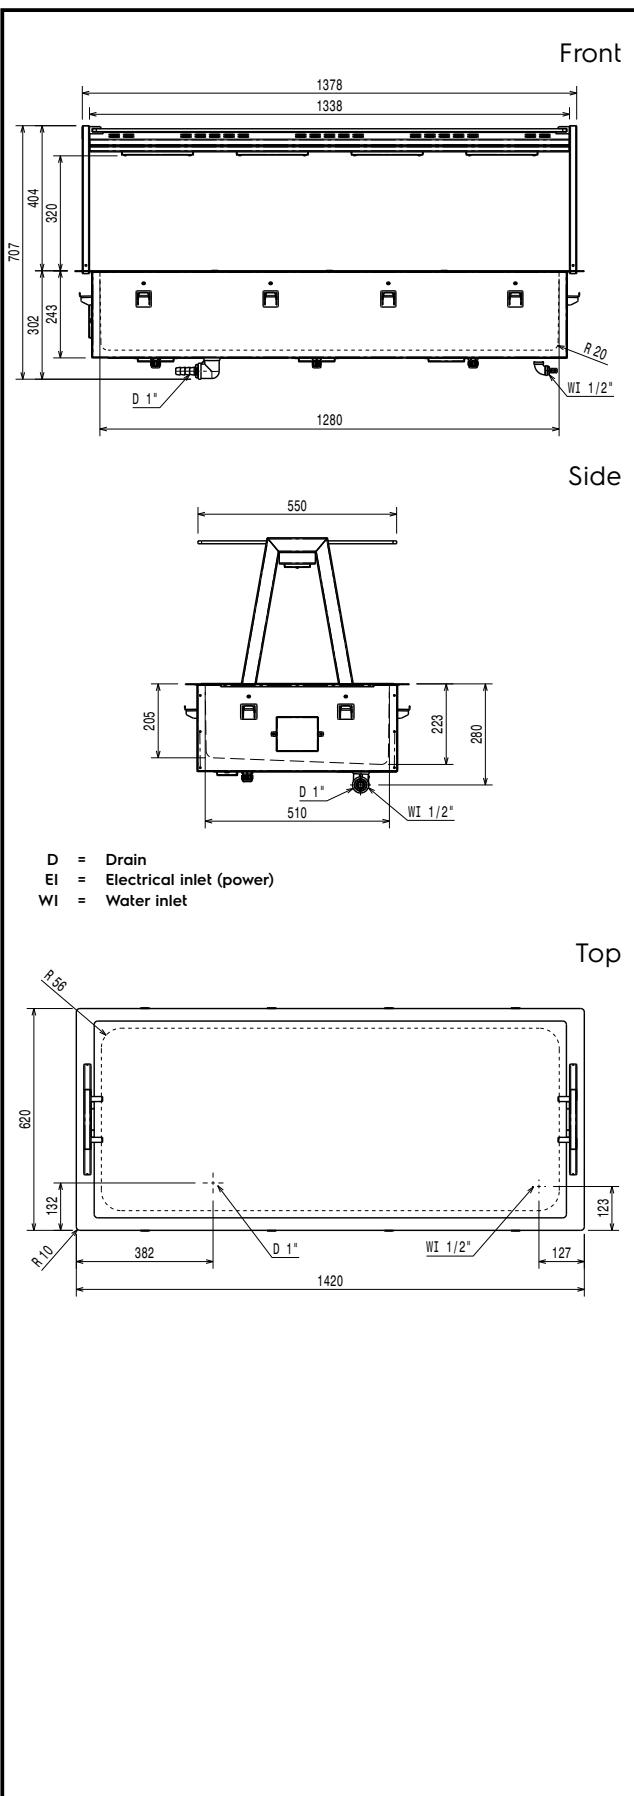


Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)



**Drop-In**  
**Drop-in bain-marie, with one well (4**  
**GN container capacity) and A overshelf**

- 19mm thick rock wool isolated with galvanize sheet guarantees excellent well insulation to reduce energy dispersion.
- Etched foil heating elements to maximize heat transmission for reduced warm-up times.


**Electric**

**Supply voltage:** 220-240 V/1N ph/50/60 Hz  
**Electrical power, max:** 3.02 kW

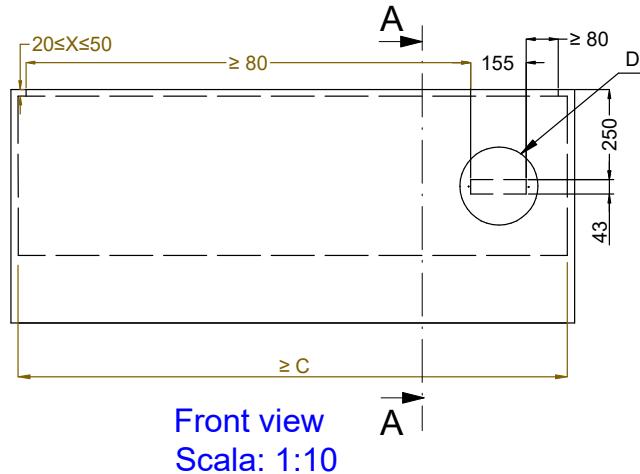

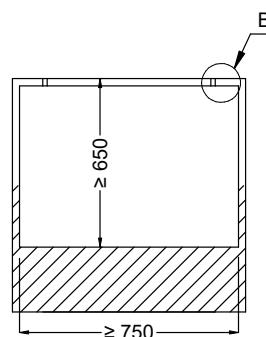

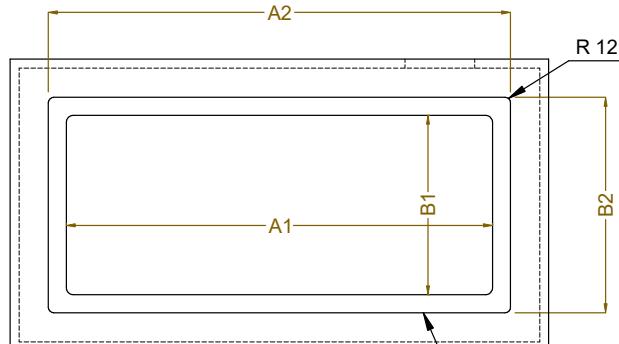
**Water:**

**Drain line size:** 1"  
**Water inlet "CW" connection:** 1/2"

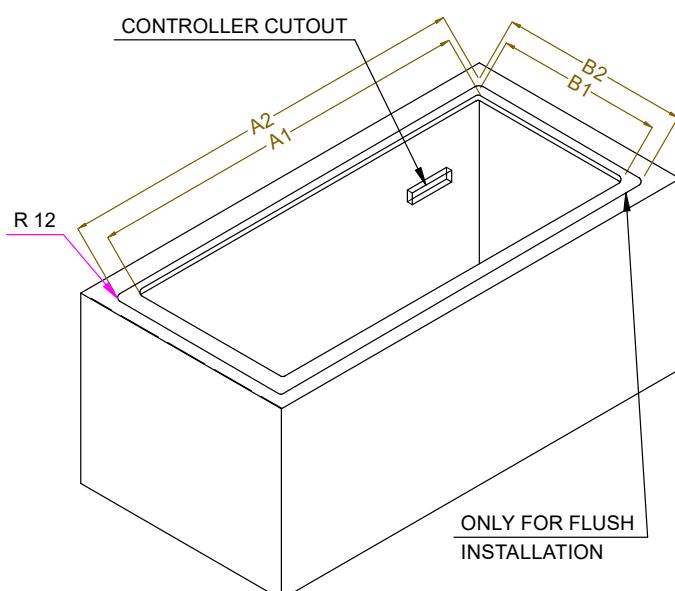
**Key Information:**

**External dimensions, Width:** 1420 mm  
**External dimensions, Depth:** 620 mm  
**External dimensions, Height:** 664 mm  
**Net weight:** 54.15 kg  
**Shipping weight:** 93 kg  
**Shipping height:** 1130 mm  
**Shipping width:** 670 mm  
**Shipping depth:** 1460 mm  
**Shipping volume:** 1.11 m<sup>3</sup>  
**Set temperature:** +85 / +95 °C

**Sustainability**
**Noise level:**


**Front view**  
Scala: 1:10

**Dettaglio D**  
Scala 1:7

**Section Cut A-A**  
Scala: 1:10

**Dettaglio B**  
Scala 1:2

**Top view**  
Scala: 1:10

| CAPACITY | CUTOUT |     | LOWERUNG FOR FLUSH INSTALLATION |     | C    |
|----------|--------|-----|---------------------------------|-----|------|
|          | A1     | B1  | A2                              | B2  |      |
| 2GN      | 740    |     | 774                             |     | 880  |
| 3GN      | 1070   | 580 | 1104                            | 624 | 1200 |
| 4GN      | 1390   |     | 1424                            |     | 1530 |


**595T03500 - WATER BAIN MARIE SINGLE WELL OVERSH. ON THE FRAME**
