Electrolux

Drop-In Drop-in refrigerated stainless steel surface (3 GN container capacity) with A overshelf



Short Form Specification

Item No.

Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free. Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole. Automatic defrosting guarantees evaporators clearance and efficient well cooling. High-density expanded polyurethane foam with cyclopenthane guarantees excellent well insulation to reduce energy dispersion. The bottom is equipped with copper tubes to ensure proper cooling, with this system the air touches the cold surface and gets cooled. Pressed Stainless steel top 30mm deep with rounded edges and drain hole for easier cleaning. Stylish A type overshelf designed for extra increased visibility on the surface for charming food display. Overshelf equipped with LED lights.

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	

Main Features

- CB and CE certifed by a third party notified body.
- Precise temperature control and setting at 0.1°C.
- As standard the product comes with digitally controlled thermostat which is in line of HACCP norms and provides visual alarm as a warning of the increasing or decreasing temperatures.
- Food introduced at the correct temperature maintains its core temperature according to Afnor Standards.
- Automatic defrosting guarantees evaporators clearance and efficient well cooling.
- Designed to serve the food on plates.
- Equipped with a drain hole to easily discharge top condensation.
- Stylish A type overshelf designed for extra increased visibility on the surface for charming food display.
- Overshelf equipped with LED lights.
- Designed to be positioned in flush installation providing improved cleanability and suitable for modern design installations.

Construction

- Well bottom is inclined to facilitate water drainage.
- Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole.
- Electronic control with temperature display.
- IPx2 water protection.
- The bottom is equipped with copper tubes • to ensure proper cooling, with this system the air touches the cold surface and gets cooled.
- Pressed Stainless steel top 30mm deep with rounded edges and drain hole for easier cleaning.
- Overshelf in complete AISI 304.

Sustainability

- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) -CFC and HCFC free.
- High-density expanded polyurethane

APPROVAL:





foam with cyclopenthane guarantees excellent well insulation to reduce energy dispersion.

Electrolux PROFESSIONAL

Drop-In Drop-in refrigerated stainless steel surface (3 GN container capacity) with A overshelf

Electric


Shipping volume:

Set temperature:

Top temperature:

Refrigerant type: Sustainability Noise level:

Refrigeration Data

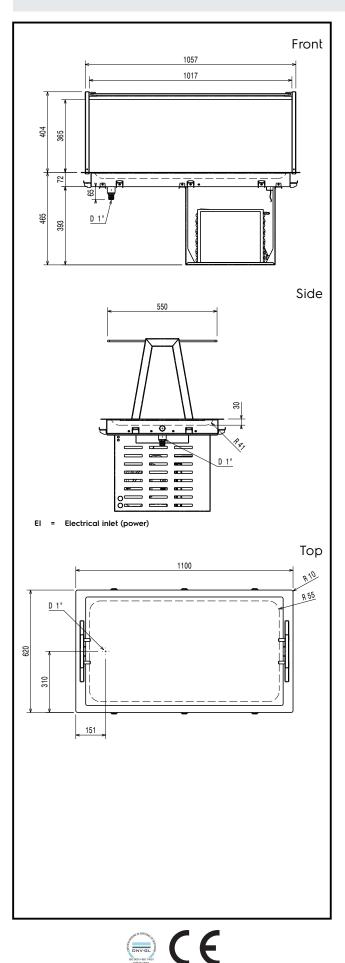

Supply voltage: Electrical power max:	220-240 V/1N ph/50 Hz 0.47 kW	
Water:		
Water drain outlet size:		
Key Information:		
External dimensions, Width:	1100 mm	
External dimensions, Depth:	620 mm	
External dimensions, Height:	794 mm	
Net weight:	59.2 kg	
Shipping weight:	90 kg	
Shipping height:	1100 mm	
Shipping width:	700 mm	
Shipping depth:	1160 mm	

0.89 m³

-10 / 0 °C

-10 / 0 °C


58,8 dBA

R290

Drop-In Drop-in refrigerated stainless steel surface (3 GN container capacity) with A overshelf The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



Drop-In Drop-in refrigerated stainless steel surface (3 GN container capacity) with A overshelf

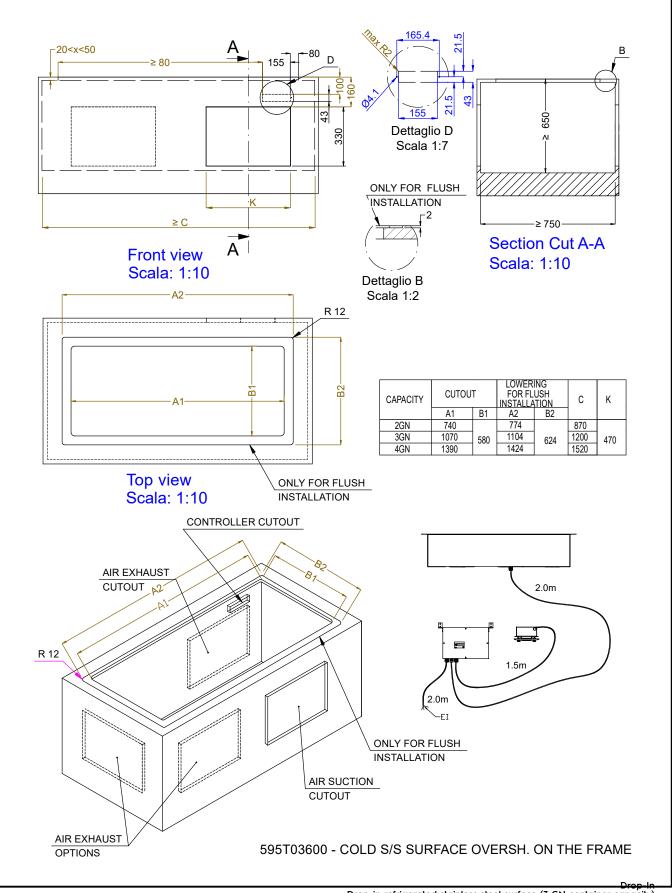

Drop-in Drop-in refrigerated stainless steel surface (3 GN container capacity) with A overshelf The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.