



**Drop-In
Drop-in refrigerated stainless steel
surface (3 GN container capacity) with A
overshelf**

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



341172 (D14C3O)

Drop-in Refrigerated
stainless steel Surface (3 GN
container capacity) with one
A type overshel and LED
light

Short Form Specification

Item No.

Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free. Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole. Automatic defrosting guarantees evaporators clearance and efficient well cooling. High-density expanded polyurethane foam with cyclopentane guarantees excellent well insulation to reduce energy dispersion. The bottom is equipped with copper tubes to ensure proper cooling, with this system the air touches the cold surface and gets cooled. Pressed Stainless steel top 30mm deep with rounded edges and drain hole for easier cleaning. Stylish A type overshel designed for extra increased visibility on the surface for charming food display. Overshel equipped with LED lights.

Main Features

- CB and CE certified by a third party notified body.
- Precise temperature control and setting at 0,1°C .
- As standard the product comes with digitally controlled thermostat which is in line of HACCP norms and provides visual alarm as a warning of the increasing or decreasing temperatures.
- Food introduced at the correct temperature maintains its core temperature according to Afnor Standards.
- Automatic defrosting guarantees evaporators clearance and efficient well cooling.
- Designed to serve the food on plates .
- Equipped with a drain hole to easily discharge top condensation.
- Stylish A type overshel designed for extra increased visibility on the surface for charming food display.
- Overshel equipped with LED lights.
- Designed to be positioned in flush installation providing improved cleanability and suitable for modern design installations.

Construction

- Well bottom is inclined to facilitate water drainage.
- Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole.
- Electronic control with temperature display.
- IPx2 water protection.
- The bottom is equipped with copper tubes to ensure proper cooling, with this system the air touches the cold surface and gets cooled.
- Pressed Stainless steel top 30mm deep with rounded edges and drain hole for easier cleaning.
- Overshel in complete AISI 304.

Sustainability

- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High-density expanded polyurethane



APPROVAL:



Experience the Excellence
www.electroluxprofessional.com






Drop-In
Drop-in refrigerated stainless steel surface
(3 GN container capacity) with A overshell

foam with cyclopentane guarantees excellent
well insulation to reduce energy dispersion.


Drop-In
Drop-in refrigerated stainless steel surface (3 GN container capacity)
with A overshell
The company reserves the right to make modifications to the products
without prior notice. All information correct at time of printing.

2026.01.12

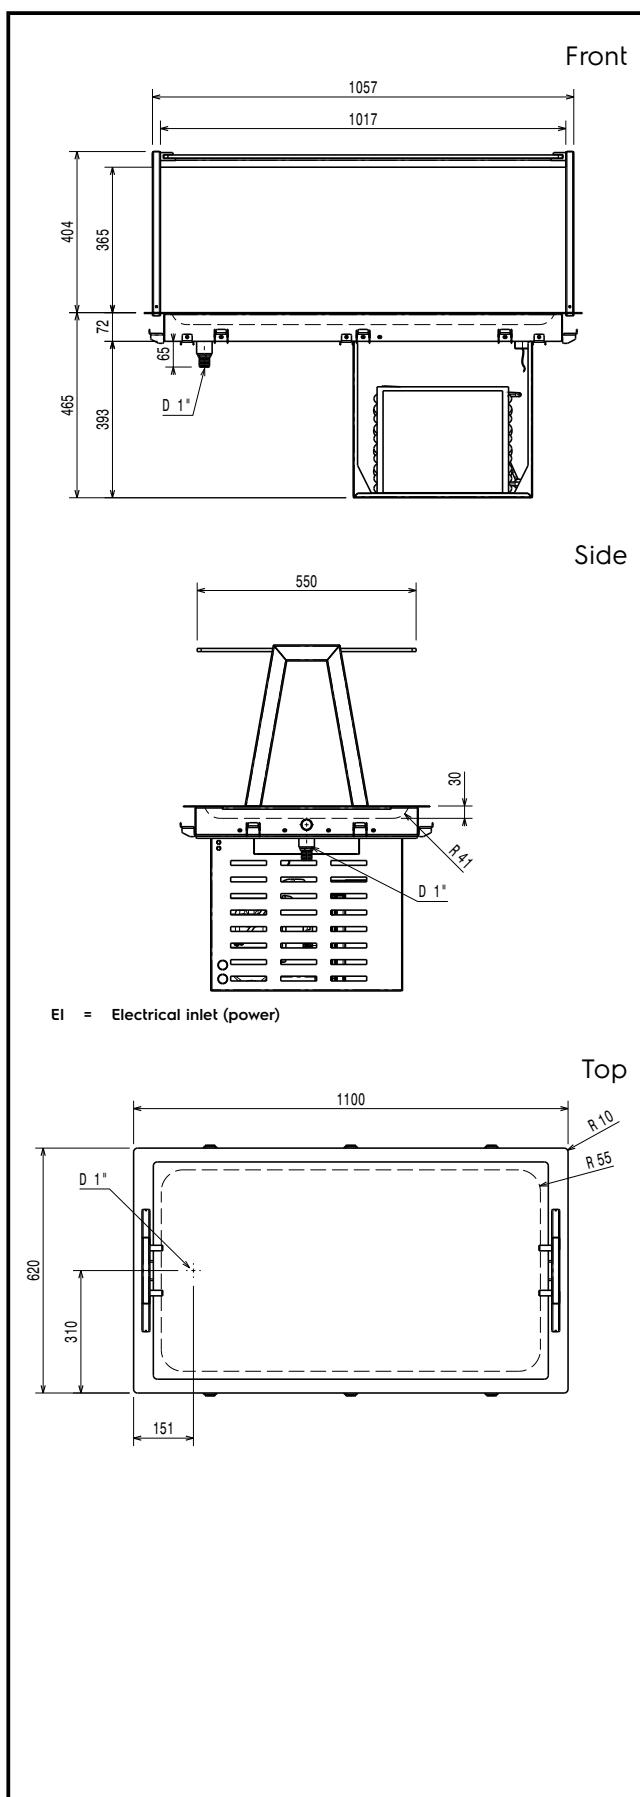

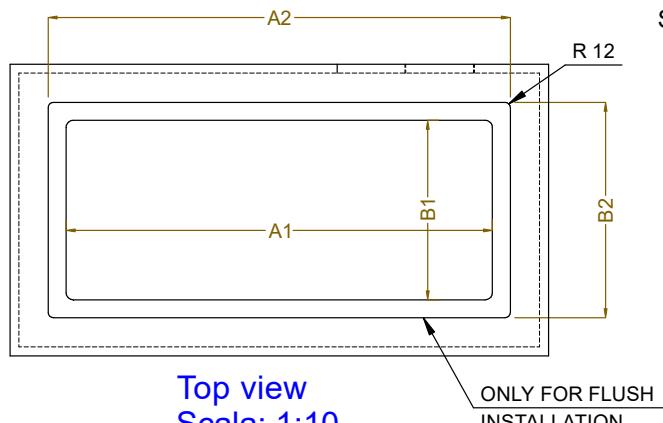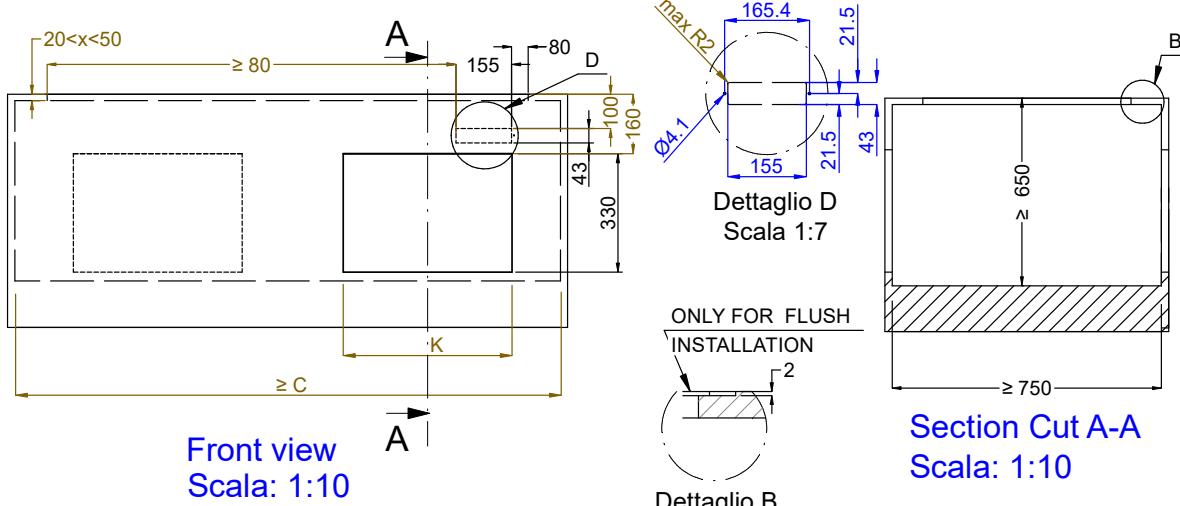

CAPACITY	CUTOUT		LOWERING FOR FLUSH INSTALLATION		C	K
	A1	B1	A2	B2		
2GN	740		774		870	
3GN	1070	580	1104	624	1200	470
4GN	1390		1424		1520	

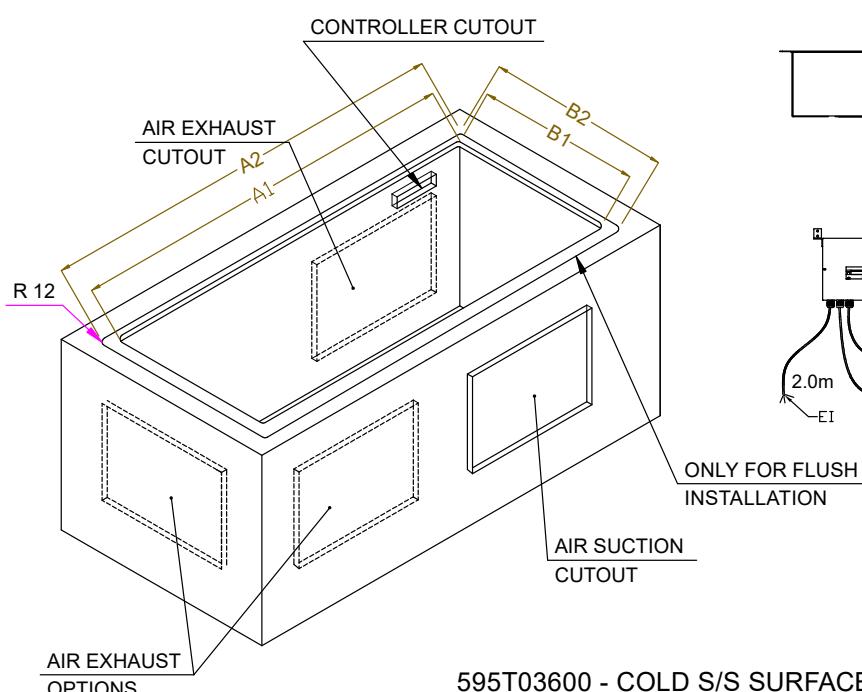

595T03600 - COLD S/S SURFACE OVERSH. ON THE FRAME