



**Drop-In
Drop-in refrigerated stainless steel
surface (4 GN container capacity) with A
overshelf**



341173 (D14C4O)

Drop-in Refrigerated
stainless steel Surface (4 GN
container capacity) with one
A type overshelf and LED
light

Short Form Specification

Item No.

Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free. Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole. Automatic defrosting guarantees evaporators clearance and efficient well cooling. High-density expanded polyurethane foam with cyclopentane guarantees excellent well insulation to reduce energy dispersion. The bottom is equipped with copper tubes to ensure proper cooling, with this system the air touches the cold surface and gets cooled. Pressed Stainless steel top 30mm deep with rounded edges and drain hole for easier cleaning. Stylish A type overshelf designed for extra increased visibility on the surface for charming food display. Overshelf equipped with LED lights.

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____

Main Features

- CB and CE certified by a third party notified body.
- Precise temperature control and setting at 0,1°C .
- As standard the product comes with digitally controlled thermostat which is in line of HACCP norms and provides visual alarm as a warning of the increasing or decreasing temperatures.
- Food introduced at the correct temperature maintains its core temperature according to Afnor Standards.
- Automatic defrosting guarantees evaporators clearance and efficient well cooling.
- Designed to serve the food on plates .
- Equipped with a drain hole to easily discharge top condensation.
- Stylish A type overshelf designed for extra increased visibility on the surface for charming food display.
- Overshelf equipped with LED lights.
- Designed to be positioned in flush installation providing improved cleanability and suitable for modern design installations.

Construction

- Well bottom is inclined to facilitate water drainage.
- Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole.
- Electronic control with temperature display.
- IPx2 water protection.
- The bottom is equipped with copper tubes to ensure proper cooling, with this system the air touches the cold surface and gets cooled.
- Pressed Stainless steel top 30mm deep with rounded edges and drain hole for easier cleaning.
- Overshelf in complete AISI 304.

Sustainability

- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High-density expanded polyurethane



APPROVAL:



Experience the Excellence
www.electroluxprofessional.com




Drop-In
Drop-in refrigerated stainless steel surface
(4 GN container capacity) with A overshell

foam with cyclopentane guarantees excellent
well insulation to reduce energy dispersion.

Drop-In
Drop-in refrigerated stainless steel surface (4 GN container capacity)
with A overshell
The company reserves the right to make modifications to the products
without prior notice. All information correct at time of printing.

2026.01.05

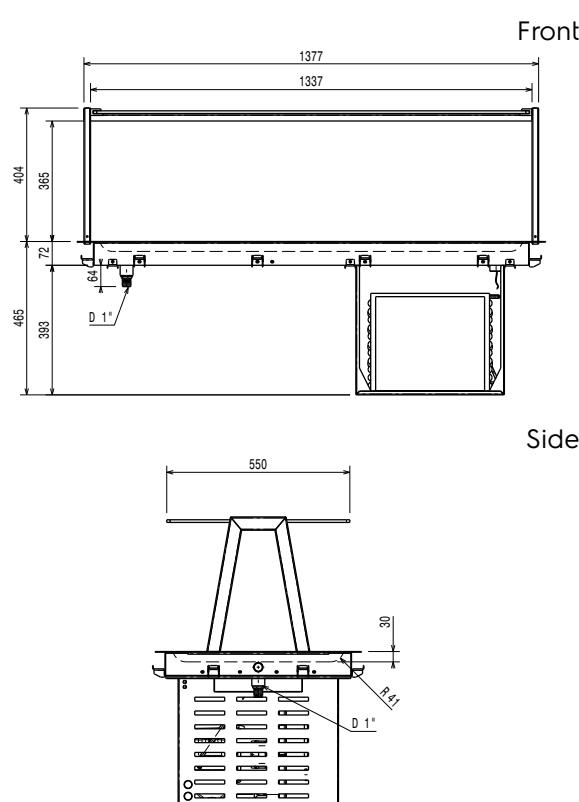

EI = Electrical inlet (power)

Electric

Supply voltage: 220-240 V/1N ph/50 Hz
Electrical power, max: 0.6 kW

Water:

Water drain outlet size:

Key Information:


External dimensions, Width: 1420 mm
External dimensions, Depth: 620 mm
External dimensions, Height: 794 mm
Net weight: 67.6 kg
Shipping weight: 106 kg
Shipping height: 1080 mm
Shipping width: 680 mm
Shipping depth: 1460 mm
Shipping volume: 1.07 m³
Set temperature: -10 / 0 °C
Top temperature: -10 / 0 °C



Refrigeration Data

Refrigerant type: R290



Sustainability

Noise level: 58,8 dBA

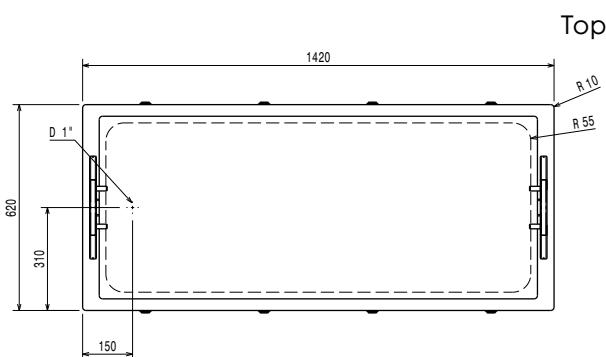

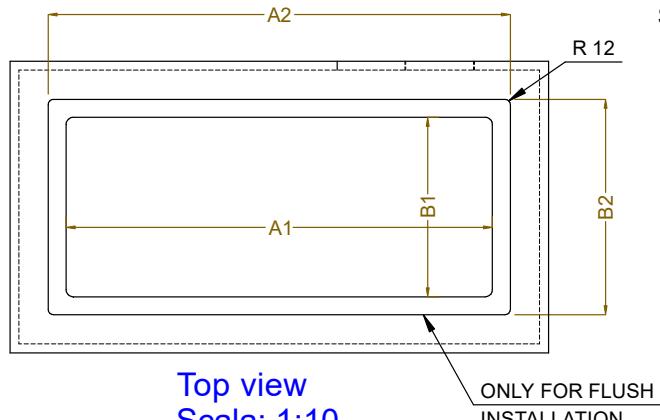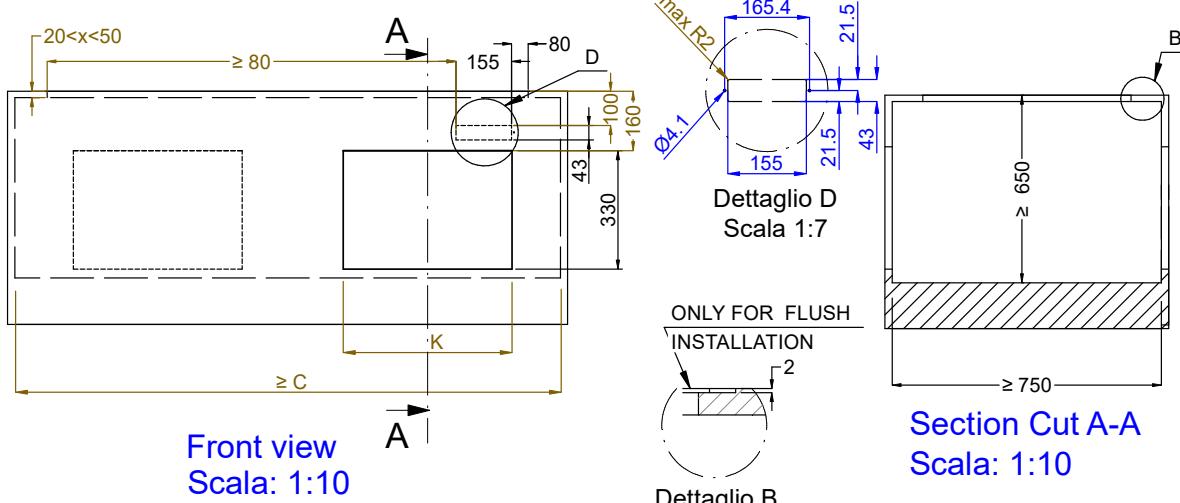

CAPACITY	CUTOUT		LOWERING FOR FLUSH INSTALLATION		C	K
	A1	B1	A2	B2		
2GN	740		774		870	
3GN	1070	580	1104	624	1200	470
4GN	1390		1424		1520	

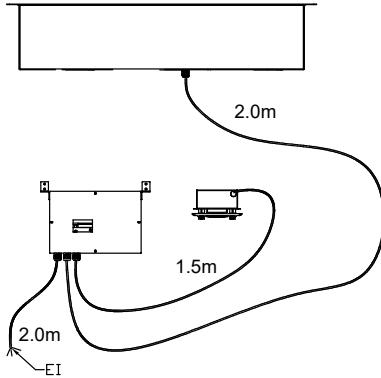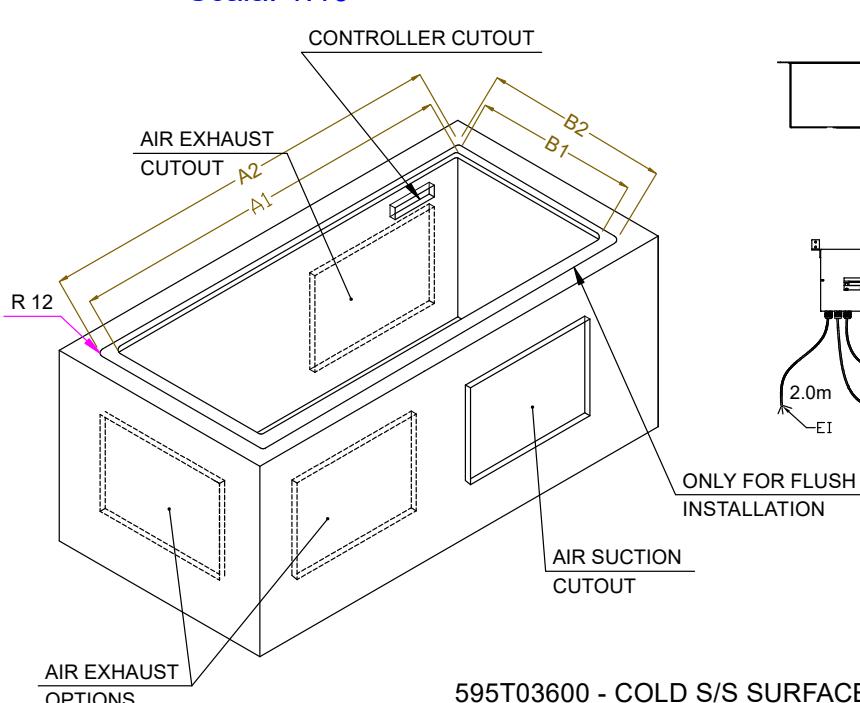

595T03600 - COLD S/S SURFACE OVERSH. ON THE FRAME