

## Drop-In Drop-in refrigerated well, static with fan (3 GN container capacity) and A overshelf

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



341175 (D11C3O)

Drop-in Refrigerated Well,  
static with fan (3 GN  
container capacity) with one  
A type overshelf and LED  
light

### Short Form Specification

#### Item No.

Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free. Designed to serve the food in gastronorm containers. Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole. Automatic defrosting guarantees evaporators clearance and efficient well cooling. High-density expanded polyurethane foam with cyclopentane guarantees excellent well insulation to reduce energy dispersion. A constant flow of cold air circulating through the containers guarantees the correct food temperatures. Temperature uniformity and fast cool down times are guaranteed thanks to powerful radial booster fans. Cylindrical stainless steel air diffusers provides a constant air circulation. 84% faster cool down time (than static refrigerated well) reduces energy consumption by allowing the operator to switch the machines on only when needed. The bottom is equipped with copper tubes to ensure proper cooling, with this system the air touches the cold surface and gets cooled. Then cooled air is being distributed with radial booster fans. Stylish A type overshelf designed for extra increased visibility on the surface for charming food display. Overshelf equipped with LED lights.

### Main Features

- Suitable for GN 1/1 containers with a maximum height of 150 mm.
- CB and CE certified by a third party notified body.
- Designed to serve the food in gastronorm containers.
- Precise temperature control and setting at 0,1°C .
- As standard the product comes with digitally controlled thermostat which is in line of HACCP norms and provides visual alarm as a warning of the increasing or decreasing temperatures.
- Food introduced at the correct temperature maintains its core temperature according to Afnor Standards.
- Automatic defrosting guarantees evaporators clearance and efficient well cooling.
- A constant flow of cold air circulating through the containers guarantees the correct food temperatures. Temperature uniformity and fast cool down times are guaranteed thanks to powerful radial booster fans. Cylindrical stainless steel air diffusers provides a constant air circulation.
- Stylish A type overshelf designed for extra increased visibility on the surface for charming food display.
- Overshelf equipped with LED lights.
- Designed to be positioned in flush installation providing improved cleanability and suitable for modern design installations.

### Construction

- Well bottom is inclined to facilitate water drainage.
- Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole.
- Electronic control with temperature display.
- IPx2 water protection.
- The bottom is equipped with copper tubes to ensure proper cooling, with this system the air touches the cold surface and gets cooled. Then cooled air is being distributed with radial booster fans.

APPROVAL: \_\_\_\_\_

- Overshell in complete AISI 304.

## Sustainability



- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High-density expanded polyurethane foam with cyclopentane guarantees excellent well insulation to reduce energy dispersion.
- 84% faster cool down time (than static refrigerated well) reduces energy consumption by allowing the operator to switch the machines on only when needed.



**Electrolux**  
PROFESSIONAL

## Drop-In Drop-in refrigerated well, static with fan (3 GN container capacity) and A overself

### Electric

Supply voltage: 220-240 V/1N ph/50 Hz  
Electrical power, max: 0.57 kW

### Water:

Water drain outlet size:

### Key Information:

External dimensions, Width: 1100 mm  
External dimensions, Depth: 620 mm  
External dimensions, Height: 999 mm  
Net weight: 70.08 kg  
Shipping weight: 85 kg  
Shipping height: 1250 mm  
Shipping width: 660 mm  
Shipping depth: 1150 mm  
Shipping volume: 0.95 m<sup>3</sup>  
Set temperature: -10 / 0 °C


### Refrigeration Data

Refrigerant type: R290


### Sustainability

Noise level: 62 dBA

Front

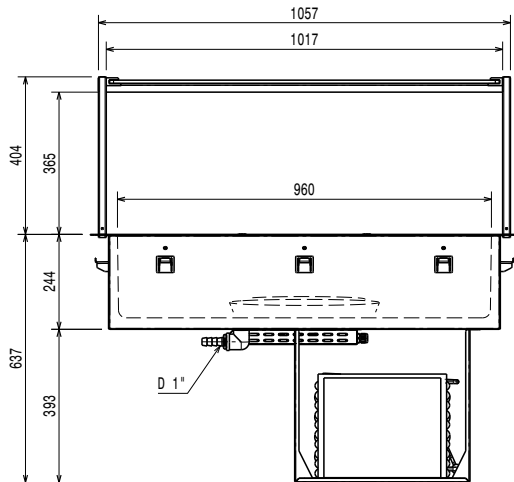


Side

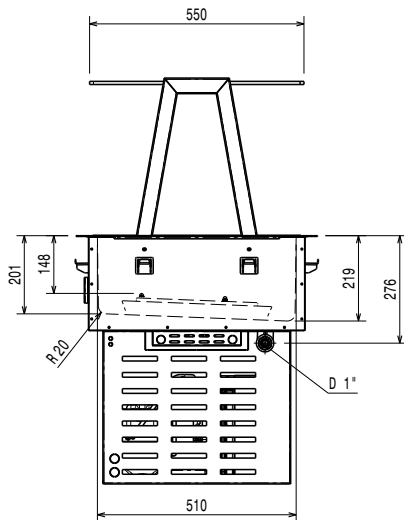



EI = Electrical inlet (power)

Top


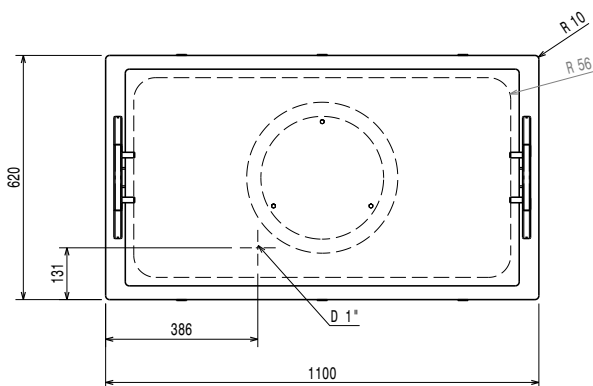


Drop-In  
Drop-in refrigerated well, static with fan (3 GN container capacity) and  
A overself  
The company reserves the right to make modifications to the products  
without prior notice. All information correct at time of printing.

2025.09.12

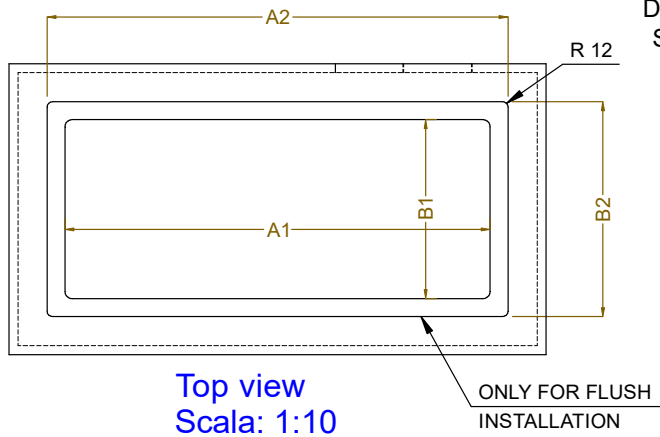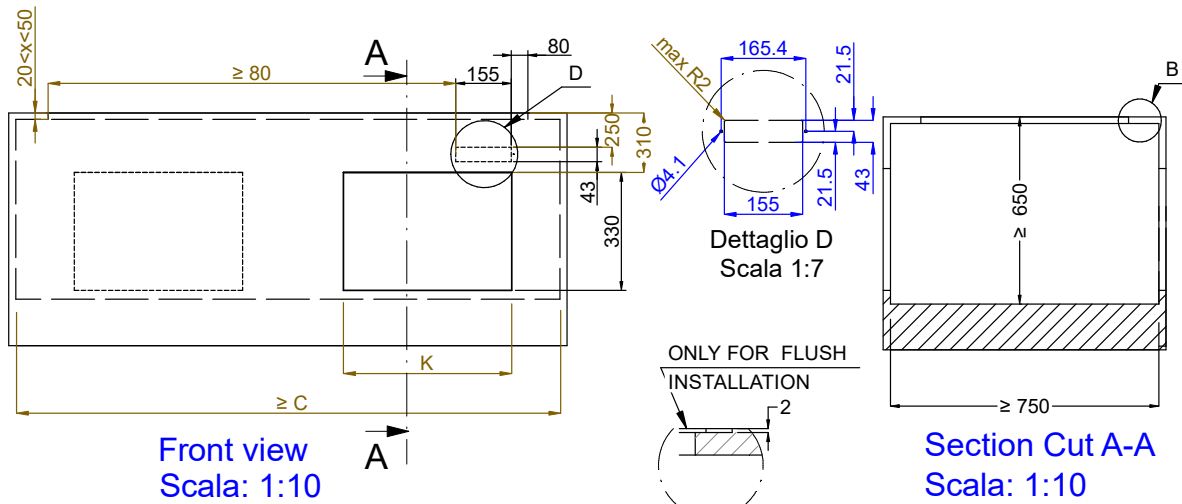

| CAPACITY | CUTOUT |     | LOWERING FOR FLUSH INSTALLATION |     | C    | K   |
|----------|--------|-----|---------------------------------|-----|------|-----|
|          | A1     | B1  | A2                              | B2  |      |     |
| 2GN      | 740    | 580 | 774                             | 624 | 880  | 470 |
| 3GN      | 1070   |     | 1104                            |     | 1200 |     |
| 4GN      | 1390   |     | 1424                            |     | 1530 |     |

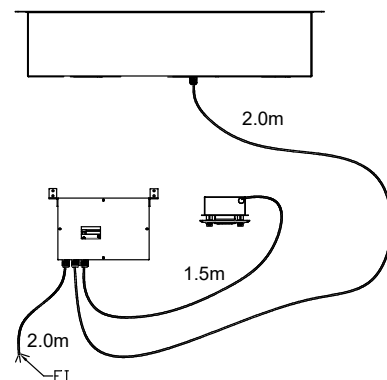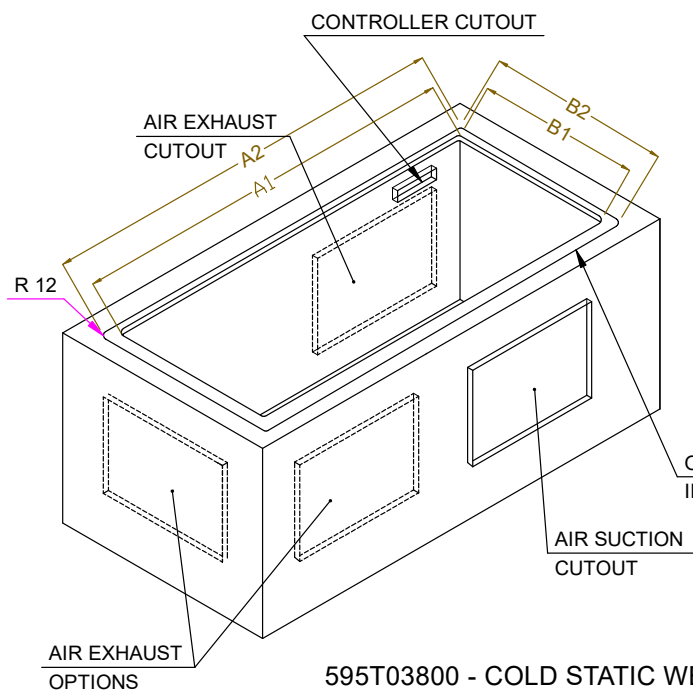

595T03800 - COLD STATIC WELL WITH FAN OVERSH. ON THE FRAME