

Drop-In Drop-in refrigerated well, static (3 GN container capacity) with A overshelf

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



341178 (D10C3O)

Drop-in Refrigerated Well,
static (3 GN container
capacity) with one A type
overshelf and LED light

Short Form Specification

Item No. _____

Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free. Designed to serve the food in gastronorm containers. Suitable for GN 1/1 containers with a maximum height of 200 mm. Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole. Automatic defrosting guarantees evaporators clearance and efficient well cooling. High-density expanded polyurethane foam with cyclopentane guarantees excellent well insulation to reduce energy dispersion. The bottom is equipped with copper tubes to ensure proper cooling, with this system the air touches the cold surface and gets cooled. Stylish A type overshelf designed for extra increased visibility on the surface for charming food display. Overshelf equipped with LED lights.

Main Features

- CB and CE certified by a third party notified body.
- Designed to serve the food in gastronorm containers.
- Suitable for GN 1/1 containers with a maximum height of 200 mm.
- Precise temperature control and setting at 0,1°C .
- As standard the product comes with digitally controlled thermostat which is in line of HACCP norms and provides visual alarm as a warning of the increasing or decreasing temperatures.
- Food introduced at the correct temperature maintains its core temperature according to Afnor Standards.
- Automatic defrosting guarantees evaporators clearance and efficient well cooling.
- Stylish A type overshelf designed for extra increased visibility on the surface for charming food display.
- Overshelf equipped with LED lights.
- Designed to be positioned in flush installation providing improved cleanability and suitable for modern design installations.

Construction

- Electronic control with temperature display.
- Well bottom is inclined to facilitate water drainage.
- Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole.
- IPx2 water protection.
- The bottom is equipped with copper tubes to ensure proper cooling, with this system the air touches the cold surface and gets cooled.
- Overshelf in complete AISI 304.

Sustainability



- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High-density expanded polyurethane foam with cyclopentane guarantees excellent well insulation to reduce energy

APPROVAL: _____



Electrolux
PROFESSIONAL

Drop-In
Drop-in refrigerated well, static (3 GN
container capacity) with A overself

dispersion.



Electrolux
PROFESSIONAL

Drop-In Drop-in refrigerated well, static (3 GN container capacity) with A overshelf

Electric

Supply voltage: 220-240 V/1N ph/50 Hz
Electrical power, max: 0.54 kW

Water:

Water drain outlet size:

Key Information:

External dimensions, Width: 1100 mm
External dimensions, Depth: 620 mm
External dimensions, Height: 999 mm
Net weight: 67.68 kg
Shipping weight: 92 kg
Shipping height: 1160 mm
Shipping width: 670 mm
Shipping depth: 1140 mm
Shipping volume: 0.89 m³
Set temperature: -15 / 0 °C


Refrigeration Data

Refrigerant type: R290


Sustainability

Noise level: 56 dBA

Front

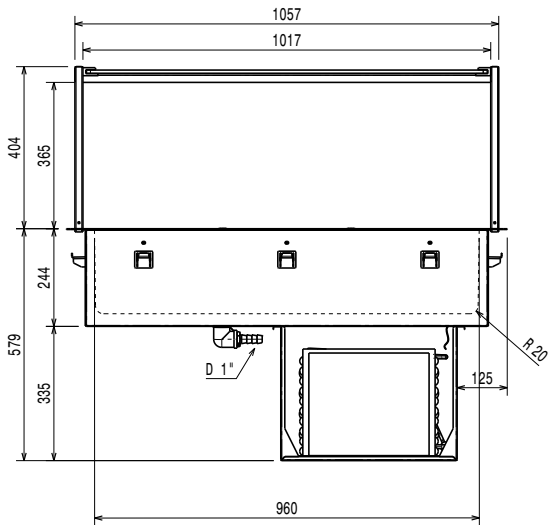


Side

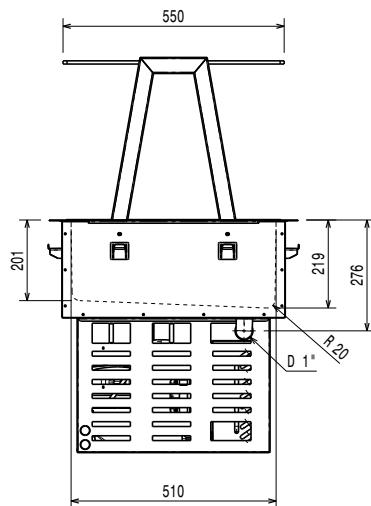

EI = Electrical inlet (power)

Top

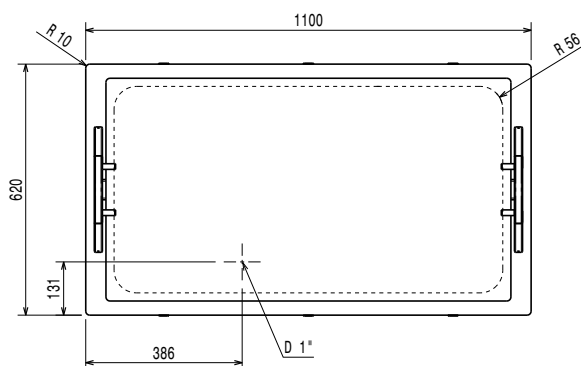



Drop-In
Drop-in refrigerated well, static (3 GN container capacity) with A overshelf
The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.11.01





Electrolux
PROFESSIONAL

Drop-In Drop-in refrigerated well, static (3 GN container capacity) with A overshelf

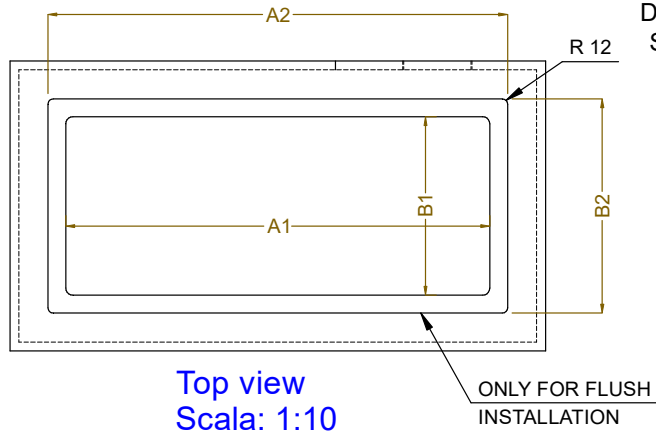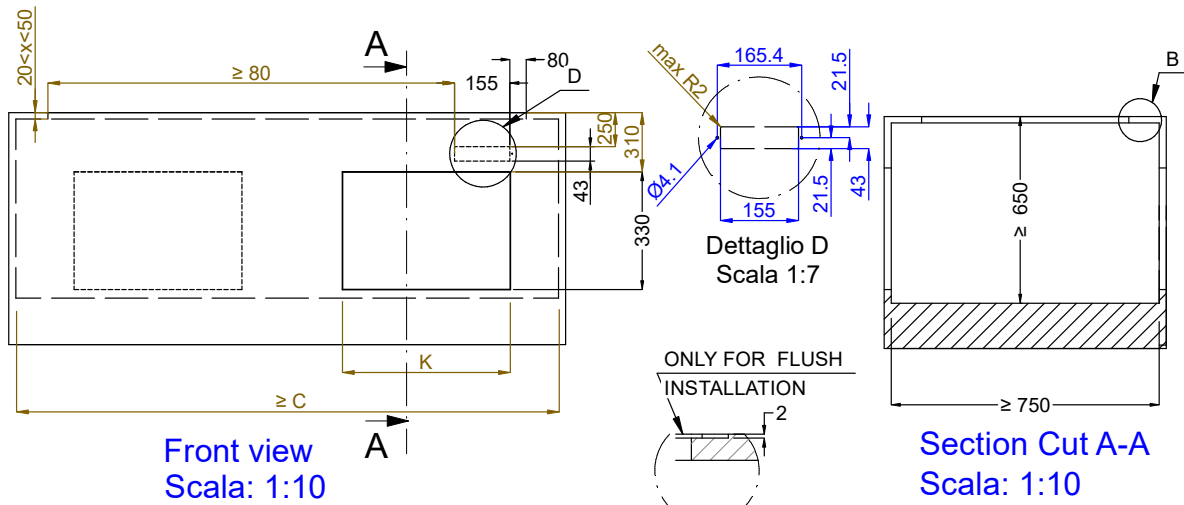

CAPACITY	CUTOUT		LOWERING FOR FLUSH INSTALLATION		C	K
	A1	B1	A2	B2		
2GN	740	580	774	624	880	470
3GN	1070		1104		1200	
4GN	1390		1424		1530	

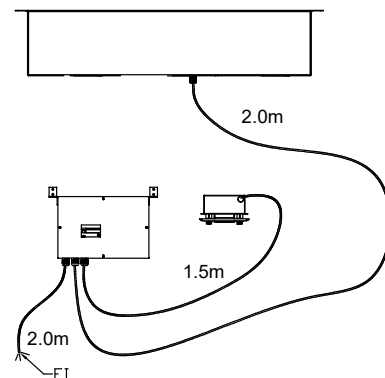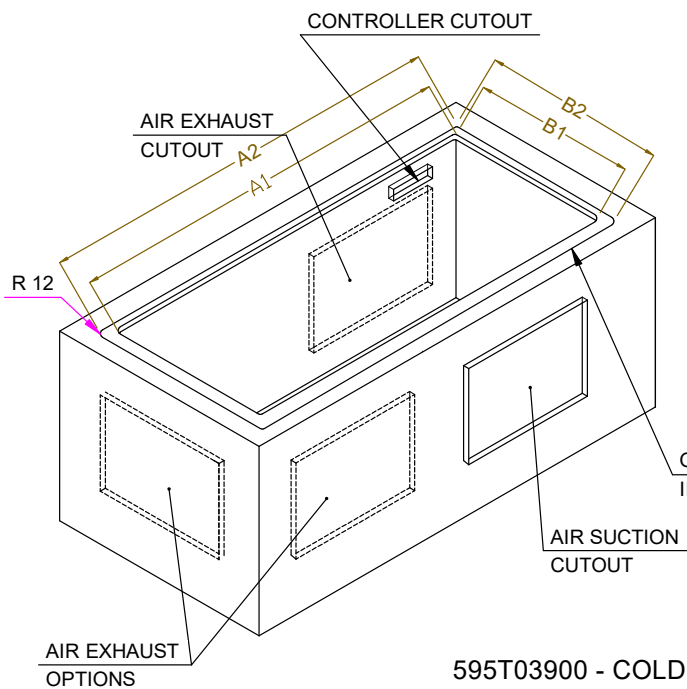

595T03900 - COLD STATIC WELL OVERSH. ON THE FRAME