

## Service Trolleys

### Heated Plate Dispenser Trolley, 2 cylinders - Ø180-240 mm

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**341183 (F33HA)**

 Heated Plate Dispenser  
 Trolley, double cylinder,  
 plate diameter 180-240 mm

### Short Form Specification

**Item No.** \_\_\_\_\_

Plate lowerator suitable to warm, transport and distribute plates. Two cylinders plate lowerator: each cylinder can accommodate up to 50 plates of 240 mm diameter. Guiding profiles inside the cartridges allows to accommodate different shaped plates/ bowls. Constructed entirely in 304 AISI stainless steel. Unit has 4 swivel castors, two with brakes.

### Main Features


- CB and CE certified by a third party notified body.
- Guiding profiles inside the cartridges allows to accommodate different shaped plates/bowls.
- Plate lowerator suitable to warm, transport and distribute plates.
- Sprung cylinders allow plates of different weights to be stacked.
- Two cylinders plate lowerator: each cylinder can accommodate up to 50 plates of 240 mm diameter

### Construction


- IPx4 water protection.
- Constructed entirely in 304 AISI stainless steel.
- 1,8 mt spiral cable with schuko plug.
- Unit has 4 swivel castors, 2 with brakes.
- Unit has a handle to easily move the trolley.
- Bumpers on corners.

**APPROVAL:** \_\_\_\_\_

Front

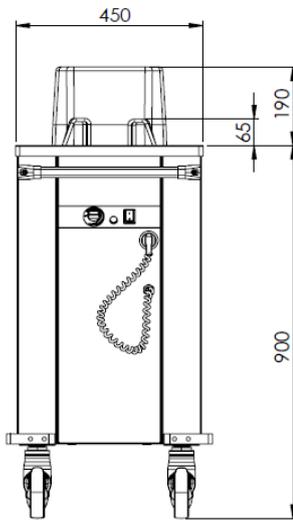


Side

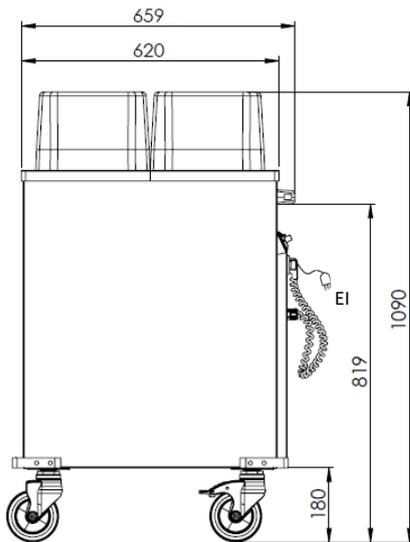

EI = Electrical inlet (power)

Top

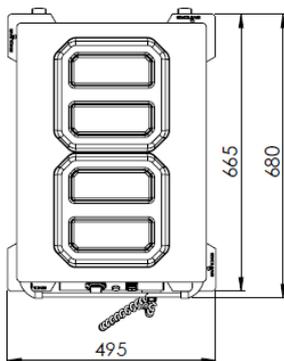

#### Electric

Supply voltage: 220-240 V/1N ph/50/60 Hz  
 Electrical power, max: 1.62 kW

#### Key Information:

External dimensions, Width: 700 mm  
 External dimensions, Depth: 495 mm  
 External dimensions, Height: 1090 mm  
 Wheel material:  
 Wheel diameter:  
 Net weight: 36 kg