



## Service Trolleys Heated Plate Dispenser Trolley, 2 cylinders - Ø180-240 mm

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_



341183 (F33HA)

Heated Plate Dispenser  
Trolley, double cylinder,  
plate diameter 180-240 mm

### Short Form Specification

#### Item No.

Plate lowerator suitable to warm, transport and distribute plates. Two cylinders plate lowerator: each cylinder can accommodate up to 50 plates of 240 mm diameter. Guiding profiles inside the cartridges allows to accommodate different shaped plates/bowls. Constructed entirely in 304 AISI stainless steel. Unit has 4 swivel castors, two with brakes.

### Main Features

- CB and CE certified by a third party notified body.
- Guiding profiles inside the cartridges allows to accommodate different shaped plates/bowls.
- Plate lowerator suitable to warm, transport and distribute plates.
- Sprung cylinders allow plates of different weights to be stacked.
- Two cylinders plate lowerator: each cylinder can accommodate up to 50 plates of 240 mm diameter

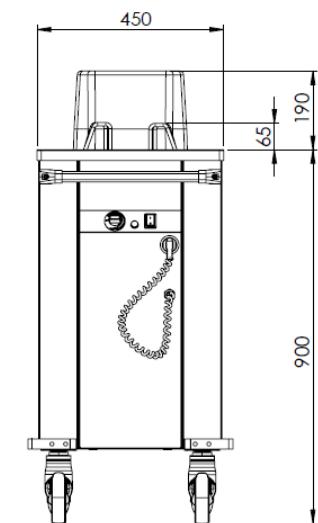
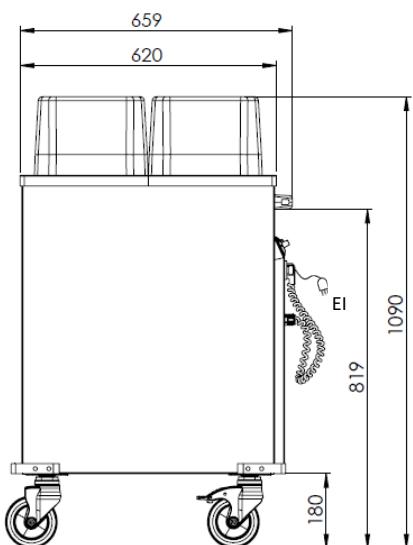
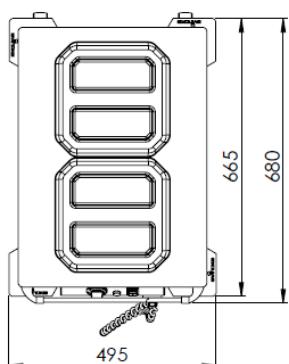
### Construction

- IPx4 water protection.
- Constructed entirely in 304 AISI stainless steel.
- 1,8 mt spiral cable with schuko plug.
- Unit has 4 swivel castors, 2 with brakes.
- Unit has a handle to easily move the trolley.
- Bumpers on corners.

APPROVAL: \_\_\_\_\_



Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)


**Front**

**Side**

**Top**
**Electric**

**Supply voltage:** 220-240 V/1N ph/50/60 Hz  
**Electrical power, max:** 1.62 kW

**Key Information:**

**External dimensions, Width:** 700 mm  
**External dimensions, Depth:** 495 mm  
**External dimensions, Height:** 1090 mm  
**Wheel material:**  
**Wheel diameter:**  
**Net weight:** 36 kg

EI = Electrical inlet (power)