

Food slicers 350 mm Gravity Slicer, gear transmission

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



601135 (MSG35G)

Gravity Slicer 350mm, gear
transmission (400V; 3; 50)

Short Form Specification

Item No. _____

Heavy duty slicer for supermarkets and delis
Base and main components in high polished satin finished
anodized aluminium for long lasting, hygiene and ease of
cleaning. The blade is in chrome force steel with blade guard
ring for added protection. Model equipped with cut thickness
adjusting knob, top mounted sharpener, cover blade and
product deflector - easily removable for cleaning. Ventilated
blade drive motor. Gear drive system for continuous daily use.
Removable carriage system permanently lubricated with
automatic clutch. IP42 water protection.
Supplied with blade removal tool.

Main Features


- Manual gravity slicer.
- Slice thickness from 0 to 24 mm.
- Cut thickness-adjusting knob (millimeter adjustment).
- Gear driven transmission permanently oil-lubricated.
- Ventilated blade drive motor designed for continuous use, with gear drive system for heavy and continuous daily operations.
- Removable carriage system permanently lubricated with automatic clutch.
- Top-mounted stone blade sharpener and cover blade easy to remove.
- Supplied with blade removal tool.
- Highest degree of safety in functioning, cleaning and maintenance.
- Cutting capacity for 350 mm model:
 - square: 210x210 mm
 - rectangular: 300x210 mm
 - round: 240 mm

Construction


- Compact design.
- Made in high polished satin finished anodized aluminium. This procedure guarantees high hygienic standards of the parts interested by the cut and resistance to acids, salts and oxidation processes.
- Plexiglass safety hand guard as standard.
- IP42 water protection.
- IP67 complete waterproof.
- The blade is made of chrome forged steel with blade guard ring for added protection.

APPROVAL: _____

Front

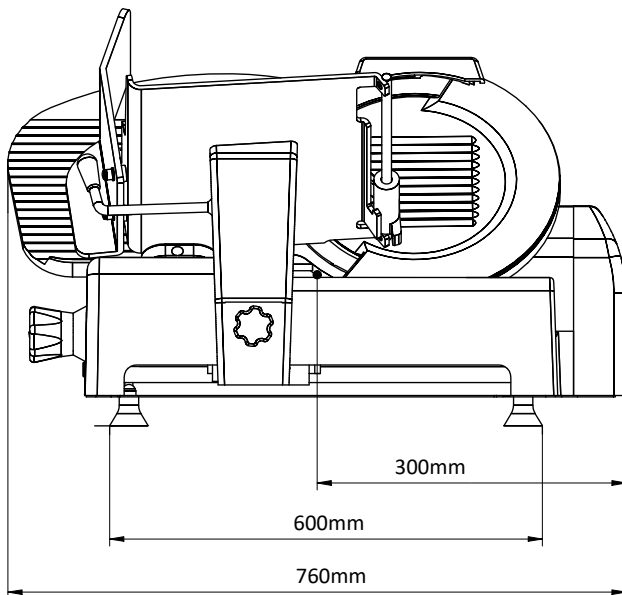

Side

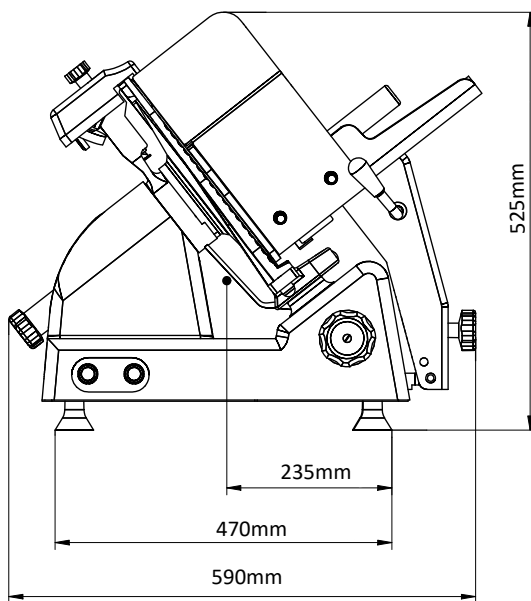

EI = Electrical inlet (power)

Electric

Supply voltage:	400 V/3N ph/50 Hz
Total Watts:	0.5 kW

Key Information:

External dimensions, Width:	760 mm
External dimensions, Depth:	590 mm
External dimensions, Height:	525 mm
Net weight (kg):	40