

LiberoPro LiberoPro Point for 2 3PH Units, 1 refrigerated drawer

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____


351085 (E2VVDBRZA)

LiberoPro Point Mobile Counter with 1 refrigerated drawer, suitable for 2 LiberoPro Line appliances with two 1-phase and two 3-phase sockets

Short Form Specification

Item No. _____

Plug in mobile cooking station in heavy duty AISI 304 stainless steel. Can be combined with up to two LiberoPro table top units 3PHASE: flat induction hobs, induction wok, induction griddle. Plate holder shelf coupled with tempered glass and lighting for a better visibility from guest side. One integrated stainless steel refrigerated drawer with 37lt capacity accepting N° 1 GN1/1 + N° 1 GN 2/4 trays. Temperature range between 0 and + 10°C. No drain required. Automatic ventilation adjustment according to cooking intensity thanks to LiberoPro Duo function. Integrated air filtration system - LiberoPro Fresh - to absorb efficiently grease particles and bad odours in the working area. It is a 2-stage system with stainless steel and ceramic activated carbon filters easy to remove for cleaning operations. For additional storage space, one optional neutral 30 lt drawer is available. Counter Plug Type : IEC/EN 60309-1/2 - 32 Amps. Mounted on 4 swiveling wheels (2 with brakes).

Main Features

- Can be combined with up to two tabletop appliances LiberoPro HP 3PHASE and/or LiberoPro 1PHASE (Plug Type Schuko): flat induction hobs, induction woks, induction griddles.
- Compact, lightweight and easy to move.
- Plate holder shelf coupled with tempered glass and lighting for a better visibility from guest side.
- Designed for LiberoPro Duo function for automatic regulation of fan speed according to cooking intensity. Can be activated exclusively with LiberoPro stand alone units.
- LiberoPro Fresh is a low noise air filtration system to absorb efficiently grease particles and bad odours in the working area. It is a 2-stage filtering system with stainless steel fat filters and ceramic activated carbon ones.
- Integrated stainless steel refrigerated drawer with temperature regulation between 0°C and +10°C. No drain required.
- 37 lt refrigerated drawer capacity accepting N° 1 GN1/1 + N° 1 GN 2/4 trays.
- 30 lt neutral drawer - accepting N° 1 GN1/1 - is available as optional accessory.
- Through the user interface with soft touch buttons the operator can:
 - vary the 4 fan speed;
 - switch on the LED lighting system of the cooking area;
 - set the temperature of the refrigerated drawer;
 - display indications on maintenance operations (e.g. on filters) or any anomalous operating conditions.

Construction

- Heavy duty AISI 304 Stainless steel construction.
- Mounted on 4 swivelling wheels with brakes on the 2 front wheels (on the operator side).
- Frontal panel in AISI 304 can be customized requiring a special execution.
- Grease and odours filters are easily accessible and removable from operator's side for efficient maintenance without any tool.
- Side support frames each holding n.2 GN 1/9 containers and n.1 tools holder. All included in the standard delivery and easily removable for better cleanability.
- Plug type: IEC/EN 60309-1/2 - 32 amps.
- IPx4 water protection.

Included Accessories

- 2 of Carbon filter for PNC 650190
Mobile Counter
- 2 of Labyrinth grease PNC 650191
filter with stainless steel
grid for Mobile Counter
- 1 of Support frame for PNC 650192
containers including 2 x
1/9 GN trays and 1
kitchen tool holder for
Mobile Counter, left side

APPROVAL: _____



- 1 of Support frame for containers including 2 x 1/9 GN trays and 1 kitchen tool holder for Mobile Counter, right side PNC 650193

Optional Accessories


- Tilting side shelf for Mobile Counter PNC 650005 ☐
- Neutral drawer for Mobile Counter PNC 650189 ☐
- Carbon filter for Mobile Counter PNC 650190 ☐
- Labyrinth grease filter with stainless steel grid for Mobile Counter PNC 650191 ☐
- Support frame for containers including 2 x 1/9 GN trays and 1 kitchen tool holder for Mobile Counter, left side PNC 650192 ☐
- Support frame for containers including 2 x 1/9 GN trays and 1 kitchen tool holder for Mobile Counter, right side PNC 650193 ☐
- Kitchen tool holder to be inserted into support frame for Mobile Counter PNC 650194 ☐
- Side paper towel support PNC 650195 ☐
- Cover in PVC for Mobile Counter 2 modules PNC 651003 ☐




Electrolux
PROFESSIONAL

LiberoPro LiberoPro Point for 2 3PH Units, 1 refrigerated drawer

Front

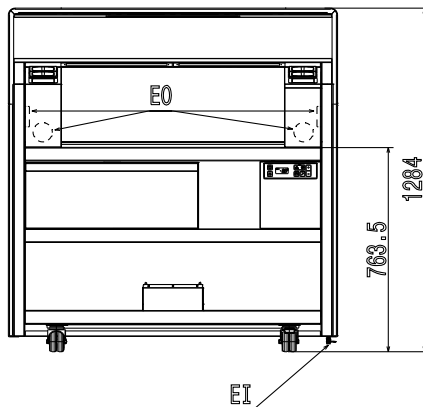


Side

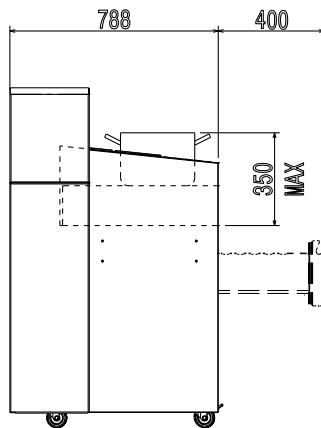

EI = Electrical inlet (power)
EO = Electrical Outlet

Top

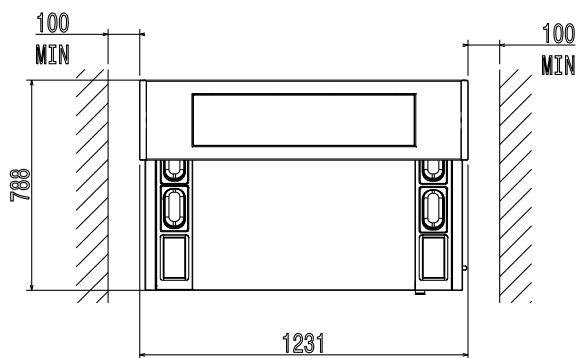

Electric

Supply voltage:	380-415/380-400 V/3N
Electrical power, max:	ph/50/60 Hz
Plug type:	15 kW
	IEC/EN 60309-1/2

Key Information:

Frontal power sockets available for Plug-in Units:	2 x 3 Phase Plugs (Plug type IEC/EN 60309-1/2) + 2 x 1 Phase Plugs (Plug Type Schuko)
External dimensions, Width:	1231 mm
External dimensions, Depth:	788 mm
External dimensions, Height:	1284 mm
Net weight:	180 kg

Sustainability

Refrigerant type:	R600a
-------------------	-------



LiberoPro
LiberoPro Point for 2 3PH Units, 1 refrigerated drawer

The company reserves the right to make modifications to the products
without prior notice. All information correct at time of printing.

2025.09.27