# Electrolux PROFESSIONAL

Modular Cooking Range Line 700XP Two Wells Freestanding Gas Fryer 15 liter



371421 (E7KKETBAMEI) 15+15-It gas Fryer free standing with 2 "V" shape wells (external burners), 2 baskets and lids included, Q Mark

# **Short Form Specification**

#### Item No.

To be installed on height adjustable feet in stainless steel. Four high efficiency 7 kW burners in stainless steel. Suitable for natural gas or LPG. Deep drawn V-shaped well. Oil drains through a tap into a container under the well. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Rightangled side edges to allow flush-fitting junction between units.

#### APPROVAL:

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	

### **Main Features**

- Unit to be mounted on 50mm height adjustable feet in stainless steel.
- Deep drawn V-Shaped wells.
- Four high efficiency 7 kW burners in stainless steel with flame failure device attached to the outside of the well.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Flame failure device on each burner.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap into a drainage container positioned under the well.
- All major compartments located in front of unit for ease of maintenance.
- Piezo spark ignition for added safety.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- IPx4 water protection.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.

#### Construction

- Interior of well with rounded corners for ease of cleaning.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Q Mark model delivered with nozzles for G30-50 mbar.

## **Included Accessories**

- 2 of Door for open base PNC 206350 cupboard
- 2 of Full size basket for 14 and 15lt PNC 921691 free standing fryers

#### **Optional Accessories**

- Junction sealing kit
  Draught diverter, 150 mm diameter
  Matching ring for flue condenser, 150 mm diameter
  Kit 4 wheels - 2 swivelling with
  PNC 206135
- Kit 4 wheels 2 swiveling with PNC 200155 brake - it is mandatory to install Base support and wheels
- Flanged feet kit
- Frontal kicking strip for concrete PNC 206148 D installation, 800mm

PNC 206136

- Frontal kicking strip for concrete PNC 206150 installation, 1000mm
- Frontal kicking strip for concrete PNC 206151 D installation, 1200mm

Experience the Excellence www.electroluxprofessional.com




•	Frontal kicking strip for concrete installation, 1600mm	PNC 206152	
•	Frontal kicking strip, 800mm (not for refr-freezer base)	PNC 206176	
•	Frontal kicking strip, 1000mm (not for refr-freezer base)	PNC 206177	
•	Frontal kicking strip, 1200mm (not for refr-freezer base)	PNC 206178	
•	Frontal kicking strip, 1600mm (not for refr-freezer base)	PNC 206179	
•	Kit 4 feet for concrete installation (not for 900 line free standing grill)	PNC 206210	
•	Sediment tray for 15lt fryers	PNC 206235	
	Flue condenser for 1 module, 150 mm diameter	PNC 206246	
•	Pair of side kicking strips	PNC 206249	
	Pair of side kicking strips for concrete installation	PNC 206265	
•	Oil drain pipe for 15lt free standing fryer	PNC 206301	
	Chimney upstand, 800mm	PNC 206304	
	Right and left side handrails	PNC 206307	Ē
	0	PNC 206308	
	Back handrail 800 mm		
	Door for open base cupboard	PNC 206350	_
	Base support for feet or wheels - 800mm (700/900)	PNC 206367	
	Base support for feet or wheels - 1200mm (700/900)	PNC 206368	
	Base support for feet or wheels - 1600mm (700/900)	PNC 206369	
	Base support for feet or wheels - 2000mm (700/900)	PNC 206370	
٠	Rear paneling - 800mm (700/900)	PNC 206374	
٠	Rear paneling - 1000mm (700/900)	PNC 206375	
٠	Rear paneling - 1200mm (700/900)	PNC 206376	
	Chimney grid net, 400mm (700XP/900)	PNC 206400	
	2 side covering panels for free standing appliances	PNC 216000	
•	Full size basket for 14 and 15lt free standing fryers	PNC 921691	
•	2 half size baskets for 14 and 15lt fryers	PNC 921692	
	Filter for fryer oil collection basin for 7lt, 14lt, 15lt free standing fryers	PNC 921693	
•	Unclogging rod for 15lt fryers drainage pipe	PNC 921695	
•	Deflector for floured products for 15lt fryers	PNC 921696	
•	Pressure regulator for gas units	PNC 927225	

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

# Electrolux PROFESSIONAL

# Modular Cooking Range Line 700XP Two Wells Freestanding Gas Fryer 15 liter

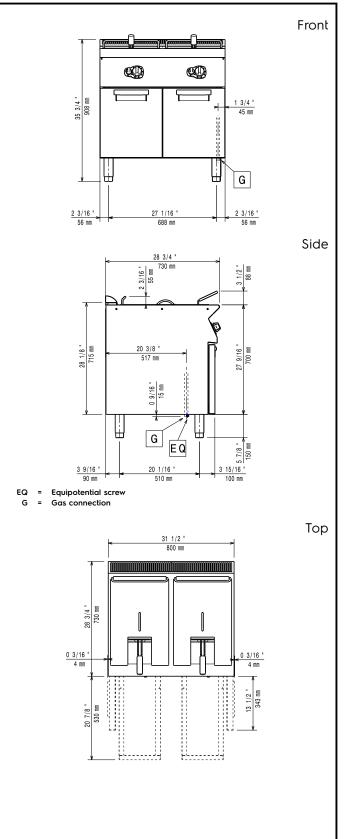

### Gas

Gas Power:	28 kW
Standard gas delivery:	G30 – 50 mbar
Gas Type Option:	G31 37 mbar
Working pressure, mBar (min/Max):	0/0
Gas Inlet:	1/2"

### **Key Information:**

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Usable well dimensions (width): Usable well dimensions (height): Usable well dimensions (depth): Well capacity: Thermostat Range: Net weight: Shipping weight: Shipping weight: Shipping height: Shipping depth: Shipping depth: Shipping volume: Certification group:

240 mm 505 mm 380 mm 13 lt MIN; 15 lt MAX 105 °C MIN; 185 °C MAX 85 kg 97 kg 1130 mm 820 mm 860 mm 0.8 m<sup>3</sup> N7FG

Modular Cooking Range Line 700XP Two Wells Freestanding Gas Fryer 15 liter

CE

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.