

Modular Cooking Range Line 700XP Full Module Gas PowerGrill Top

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA#	



371440 (E7JJCTAOMEI)

Full module gas PowerGrill Top - HP, Q Mark

Short Form Specification

Item No.

To be installed on open base installations, bridging supports or cantilever systems. High efficiency 14 kW stainless steel gas burners with flame failure device, optimized combustion and protected pilot light. Suitable for natural gas or LPG. Cooking surface grids in enameled cast iron, easily removable for cleaning. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Rightangled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Stainless steel burners with flame failure device, optimized combustion and protected pilot light.
- AISI 441 stainless steel deflective shields located below the radiants prevent burners from clogging, minimize flare ups and ensure even heat distribution (PATENT US9591947B2 and related family).
- Dishwasher-safe radiants removable without the use of tools to facilitate cleaning.
- Stainless steel high splash guards on the rear and sides of cooking surface. Splash guards can be easily removed for cleaning and are dishwasher-safe.
- Cooking grids made in highly resistant enameled cast iron for easy cleaning.
- Suitable for countertop installation.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- IPx4 water protection.
- Q Mark model delivered with nozzles for G30-50 mbar.

APPROVAL:






Modular Cooking Range Line 700XP Full Module Gas PowerGrill Top


Optional Accessories

Junction sealing kit	PNC 206086	
• Draught diverter, 150 mm diameter	PNC 206132	
 Matching ring for flue condenser, 150 mm diameter 	PNC 206133	
• Support for bridge type installation, 800mm	PNC 206137	
• Support for bridge type installation, 1000mm	PNC 206138	
• Support for bridge type installation, 1200mm	PNC 206139	
• Support for bridge type installation, 1600mm	PNC 206141	
 Flue condenser for 1 module, 150 mm diameter 	PNC 206246	
 Right and left side handrails 	PNC 206307	
Back handrail 800 mm	PNC 206308	
 Scraper kit with hooks for HP grills 	PNC 206347	
• Base support for feet or wheels - 2000mm (700/900)	PNC 206370	
 Kit G.25.3 (NI) gas nozzles for 700 and 900 gas grills (standard and HP) 	PNC 206462	
• Frontal handrail, 800mm	PNC 216047	
 Frontal handrail, 1200mm 	PNC 216049	
• Frontal handrail, 1600mm	PNC 216050	
 Large handrail - portioning shelf, 800mm 	PNC 216186	
 2 side covering panels for top appliances 	PNC 216277	
 Pressure regulator for gas units 	PNC 927225	




Modular Cooking Range Line 700XP Full Module Gas PowerGrill Top





EQ = Equipotential screw

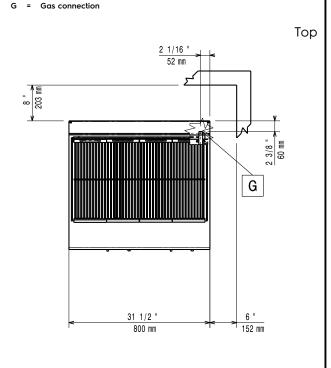

Gas

Gas Power: 14 kW

Standard gas delivery: G30 – 50 mbar **Gas Type Option:** G31 37 mbar

Gas Inlet: 1/2"

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Net weight: 60 kg Shipping weight: 87 kg Shipping height: 580 mm Shipping width: 820 mm Shipping depth: 860 mm Shipping volume: 0.41 m³ Certification group: N7EGG Cooking surface width: 742 mm Cooking surface depth: 472 mm

> Modular Cooking Range Line 700XP Full Module Gas PowerGrill Top

