

**Modular Cooking Range Line
 900XP One Well Gas Fryer 23 liter with
 Electronic Programmable control and
 Oil filtering**

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____


391334 (E9KKIBBAMCG)

23-lt gas Fryer with 1 "V" shaped well (external heating elements), electronic control, programmable, oil recirculation pump, 2 half size baskets and lid included, prearranged for advanced filtering system (optional accessory) - HP

391376 (E9KKIQBAMCG)

23-lt gas Fryer with 1 "V" shaped well (external heating elements), electronic control, programmable, oil recirculation pump, 2 half size baskets and lid included, prearranged for advanced filtering system (optional accessory) - HP (60Hz)

Short Form Specification

Item No. _____

Burners in stainless steel. Suitable for natural gas or LPG attached to the outside of the well. Deep drawn V-Shaped well. The unit is equipped with a programmable electronic control panel. Unit predisposed for advanced filtering system. Melting function. Oil drains through a tap into a container positioned under the well; stainless steel filter included.

Height adjustable feet in stainless steel. Exterior panels in stainless steel. Worktop in 20/10, stainless steel. Right-angled side edges eliminate gaps and possible dirt traps between units.

Main Features

- Deep drawn V-Shaped well.
- Built-in smart electronic control system to monitor the temperature during frying to guarantee the safety of the process.
- Flame failure device on each burner.
- Overheat protection thermostat as standard on all units.
- Integrated oil filtering system with a pump for oil circulation.
- The unit is predisposed for ADVANCED FILTERING SYSTEM with paper filters to remove the smallest food residuals and extend the oil life.
- All major compartments located in front of unit for ease of maintenance.
- Unit to be equipped with electronic control panel.
- Supplied as standard with 2 half size baskets and 1 right side door for cupboard.
- The special design of the control panel offers a better guarantee against oil infiltration.
- High efficiency 26 kW burners in stainless steel with flame failure device attached to the outside of the well.
- Thermostatic regulation of oil temperature up to a maximum of 190 °C.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.

Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Interior of well with rounded corners for ease of cleaning.
- Unit delivered with four 50 mm legs in stainless steel as standard.

APPROVAL: _____

Included Accessories


- 1 of Stainless steel oil filter for 18/23lt fryers PNC 200086
- 1 of Door for open base cupboard PNC 206350
- 1 of 2 half size baskets for 15lt OptiOil and 18/23lt fryers PNC 927223

- Pressure regulator for gas units (only for 391334) PNC 927225
- 1 full size basket for 15lt OptiOil and 18/23lt fryers (only for 391334) PNC 927226
- Unclogging rod for 23lt fryers drainage pipe (only for 391334) PNC 927227
- Deflector for floured products for 23lt fryers (only for 391334) PNC 960645


Optional Accessories

- Kit for advanced filtration system for 23-litre fryer, allowing to remove the smallest food residuals and extend oil life - 900XP (only for 391334) PNC 200084
- Pack of 100 paper filters for advanced filtration system for 23lt fryers with oil pump and OptiOil fryers (only for 391334) PNC 200085
- Stainless steel oil filter for 18/23lt fryers (only for 391334) PNC 200086
- Kit oil pump drain extension for 23lt fryers with oil pump and OptiOil fryers (only for 391334) PNC 200087
- Junction sealing kit (only for 391334) PNC 206086
- Draught diverter, 120 mm diameter (only for 391334) PNC 206126
- Matching ring for flue condenser, 120 mm diameter (only for 391334) PNC 206127
- Kit 4 wheels - 2 swivelling with brake - it is mandatory to install Base support and wheels (only for 391334) PNC 206135
- Flanged feet kit (only for 391334) PNC 206136
- Pair of side kicking strips (not for refr-freezer base) (only for 391334) PNC 206180
- Hygienic lid for 23lt fryers (only for 391334) PNC 206201
- Frontal kicking strip for 23lt fryers in two parts (only for 391334) PNC 206203
- Extension pipe for oil drainage for fryers (only for 391334) PNC 206209
- Electric heating kit for cupboards (only for 391334) PNC 206259
- Flue condenser for 1/2 module, 120 mm diameter (only for 391334) PNC 206310
- Door for open base cupboard (only for 391334) PNC 206350
- Base support for feet or wheels (lateral) for 23lt fryers, pasta cookers and refrigerated bases (900XP) (only for 391334) PNC 206372
- Kit G.25.3 (NI) gas nozzles for 900 fryers (only for 391334) PNC 206467
- 2 side covering panels for free standing appliances (only for 391334) PNC 216134
- Sediment collection tray for 23-litre fryer (to be put in the well) (only for 391334) PNC 921023
- 2 half size baskets for 15lt OptiOil and 18/23lt fryers (only for 391334) PNC 927223

Front

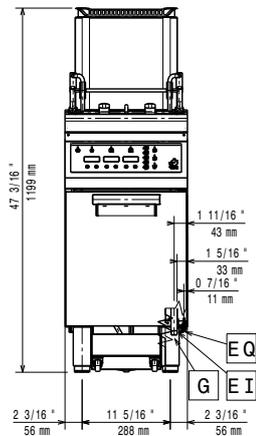


Side

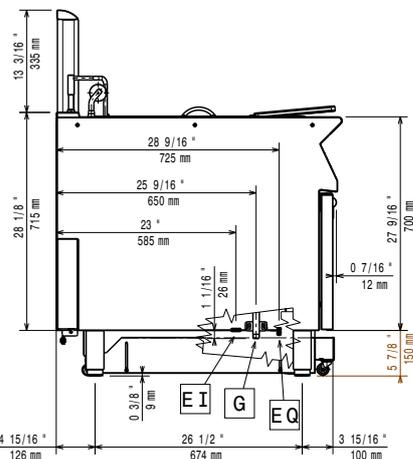

EI = Electrical inlet (power)
 EQ = Equipotential screw
 G = Gas connection

Top

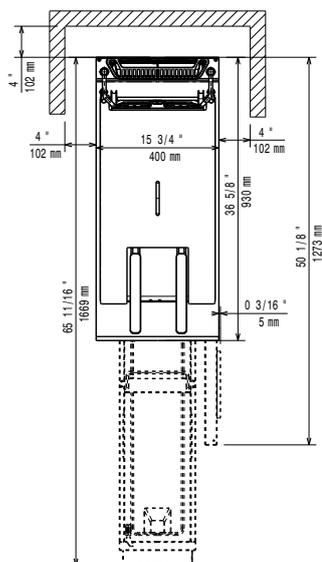

Electric

Total watts:	0.1kW
Supply voltage:	
391334 (E9KKIBBAMCG)	220-240 V/1 ph/50 Hz
391376 (E9KKIQBAMCG)	220-240 V/1 ph/60 Hz

Gas

Gas Power:	26 kW
Standard gas delivery:	Natural Gas G20 (20mbar)
Gas Type Option:	LPG; Natural Gas
Gas Inlet:	1/2"

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Usable well dimensions (width):	340 mm
Usable well dimensions (height):	575 mm
Usable well dimensions (depth):	400 mm
Well capacity:	21 lt MIN; 23 lt MAX
Performance*:	36.5 kg/hr
Thermostat Range:	110 °C MIN; 190 °C MAX
Net weight:	87 kg
Shipping weight:	
391334 (E9KKIBBAMCG)	100 kg
391376 (E9KKIQBAMCG)	99 kg
Shipping height:	
391334 (E9KKIBBAMCG)	1480 mm
391376 (E9KKIQBAMCG)	1360 mm
Shipping width:	460 mm
Shipping depth:	1020 mm
Shipping volume:	
391334 (E9KKIBBAMCG)	0.69 m ³
391376 (E9KKIQBAMCG)	0.64 m ³
*Based on:	

Inspired by ASTM F1361, ensuring max productivity
 ASTM F1361-Deep fat fryers
 GF91R23

Certification group: