



**Electrolux**  
PROFESSIONAL

**Modular Cooking Range Line  
900XP Two Wells Gas Fryer 23 liter**

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**391633 (E9KKGTBAMEI)**

23+23-lt gas Fryer with 2 "V" shaped wells (external burners), 4 half size baskets and lids included, Q Mark

**Short Form Specification**

**Item No.** \_\_\_\_\_

High efficiency 42 kW burners in stainless steel. Suitable for natural gas or LPG. Deep drawn V-Shaped wells. Oil drains through a tap into a container positioned under the well. Height adjustable feet in stainless steel. Exterior panels in stainless steel. Worktop in 20/10, stainless steel. Right-angled side edges eliminate gaps and possible dirt traps between units.

**Main Features**

- Deep drawn V-Shaped wells.
- Thermostatic regulation of oil temperature up to a maximum of 190 °C.
- Flame failure device on each burner.
- Overheat protection thermostat as standard on all units.
- All major compartments located in front of unit for ease of maintenance.
- Piezo spark ignition for added safety.
- The special design of the control knob system guarantees against water infiltration.
- Supplied as standard with 4 half size baskets and 1 right and left side doors for cupboard.
- High efficiency 42 kW burners in stainless steel with flame failure device attached to the outside of the well.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.

**Construction**

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Interior of well with rounded corners for ease of cleaning.
- Unit delivered with four 50 mm legs in stainless steel as standard.
- Q Mark model delivered with nozzles for G30-50 mbar.

**APPROVAL:** \_\_\_\_\_



Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)


**Included Accessories**

- 2 of Door for open base cupboard PNC 206350
- 2 of 2 half size baskets for 15lt OptiOil and 18/23lt fryers PNC 927223


**Optional Accessories**

- Stainless steel oil filter for 18/23lt fryers PNC 200086
- Junction sealing kit PNC 206086
- Draught diverter, 150 mm diameter PNC 206132
- Matching ring for flue condenser, 150 mm diameter PNC 206133
- Kit 4 wheels - 2 swivelling with brake - it is mandatory to install Base support and wheels PNC 206135
- Flanged feet kit PNC 206136
- Support for bridge type installation, 1400mm PNC 206140
- Pair of side kicking strips (not for refr-freezer base) PNC 206180
- Hygienic lid for 23lt fryers PNC 206201
- Frontal kicking strip for 23lt fryers in two parts PNC 206203
- Extension pipe for oil drainage for fryers PNC 206209
- Flue condenser for 1 module, 150 mm diameter PNC 206246
- Chimney upstand, 800mm PNC 206304
- Door for open base cupboard PNC 206350
- Base support for feet or wheels (lateral) for 23lt fryers, pasta cookers and refrigerated bases (900XP) PNC 206372
- Chimney grid net, 400mm (700XP/900) PNC 206400
- Kit G.25.3 (NI) gas nozzles for 900 fryers PNC 206467
- 2 side covering panels for free standing appliances PNC 216134
- Sediment collection tray for 23-litre fryer (to be put in the well) PNC 921023
- 2 half size baskets for 15lt OptiOil and 18/23lt fryers PNC 927223
- Pressure regulator for gas units PNC 927225
- 1 full size basket for 15lt OptiOil and 18/23lt fryers PNC 927226
- Unclogging rod for 23lt fryers drainage pipe PNC 927227
- Deflector for floured products for 23lt fryers PNC 960645

Front

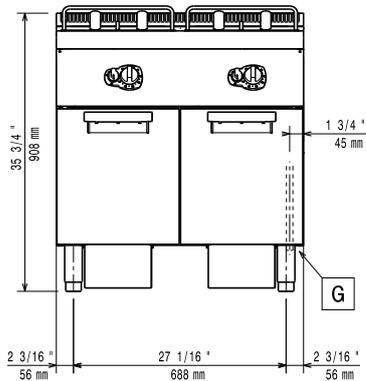


Side

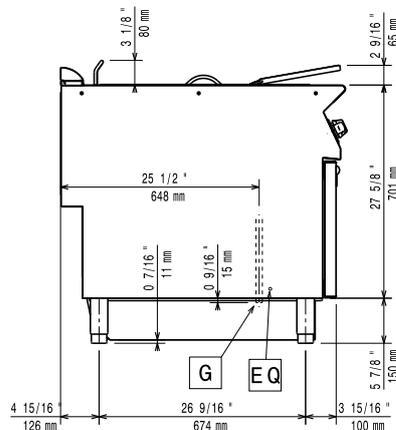

EQ = Equipotential screw  
 G = Gas connection

Top

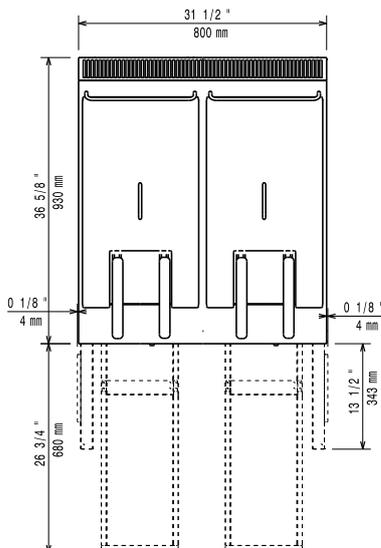

### Gas

|                        |               |
|------------------------|---------------|
| Gas Power:             | 42 kW         |
| Standard gas delivery: | G30 - 50 mbar |
| Gas Type Option:       | G31 37 mbar   |
| Gas Inlet:             | 1/2"          |

### Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

|                                  |                        |
|----------------------------------|------------------------|
| Usable well dimensions (width):  | 340 mm                 |
| Usable well dimensions (height): | 575 mm                 |
| Usable well dimensions (depth):  | 400 mm                 |
| Well capacity:                   | 21 lt MIN; 23 lt MAX   |
| Performance*:                    | 56.8 kg\hr             |
| Thermostat Range:                | 120 °C MIN; 190 °C MAX |
| Net weight:                      | 115 kg                 |
| Shipping weight:                 | 126 kg                 |
| Shipping height:                 | 1080 mm                |
| Shipping width:                  | 1020 mm                |
| Shipping depth:                  | 860 mm                 |
| Shipping volume:                 | 0.95 m <sup>3</sup>    |

\*Based on:  
 Certification group: GF92M23  
 Inspired by ASTM F1361, ensuring max productivity