

Modular Preparation 400 mm Ambient Unit with 1 Hinged Door

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



121814 (TERP4)

Ambient Unit with 1 hinged
door, 400mm

Short Form Specification

Item No. _____

Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.

Main Features

- Masonry installation possible by simply removing feet.
- Extremely easy to clean thanks to the smooth edges.

Construction

- Made in 304 AISI CrNi 18/10 stainless steel with Scotch Brite finish.
- Front and rear lengthwise stainless steel c-channel reinforcement, 15/10 (16 gauges).
- Internal sides supporting the structure to have 45° degrees internal side corners junction system.
- 30 mm high middle-shelf in AISI 304 stainless steel, height-adjustable in 3 positions, with inner double fold to eliminate gaps between sides and back.
- Sound deadening reinforcements between internal and external side panels to strengthen structure.
- Mounted on 150 mm height adjustable (0/+90 mm) oversized (65x65 mm) feet.
- Hinged door with sound deadening internal panels, fitted with 304 AISI stainless steel hinges on the inner sides, allows a 180° degree opening.

Optional Accessories

- | | |
|--|-------------------------------------|
| • Stainless steel plinth, 400mm | PNC 855820 ☐ |
| • Stainless steel plinth, 500mm | PNC 855821 ☐ |
| • Stainless steel plinth, 600mm | PNC 855822 ☐ |
| • Stainless steel plinth, 800mm | PNC 855824 ☐ |
| • Stainless steel plinth, 900mm | PNC 855825 ☐ |
| • Stainless steel plinth, 1000mm | PNC 855826 ☐ |
| • Stainless steel plinth, 1100mm | PNC 855827 ☐ |
| • Stainless steel plinth, 1200mm | PNC 855828 ☐ |
| • Stainless steel plinth, 1300mm | PNC 855829 ☐ |
| • Stainless steel plinth, 1400mm | PNC 855830 ☐ |
| • Stainless steel plinth, 1500mm | PNC 855831 ☐ |
| • Stainless steel plinth, 1600mm | PNC 855832 ☐ |
| • Stainless steel plinth, 1700mm | PNC 855833 ☐ |
| • Stainless steel plinth, 1800mm | PNC 855834 ☐ |
| • Stainless steel plinth, 1900mm | PNC 855835 ☐ |
| • Stainless steel plinth, 2000mm | PNC 855836 ☐ |
| • Stainless steel plinth for end elements, 700mm depth | PNC 855837 ☐ |
| • Stainless steel plinth for end elements, central installation, 700mm depth | PNC 855838 ☐ |
| • Stainless steel plinth, 2400mm | PNC 855839 ☐ |


APPROVAL: _____




Electrolux
PROFESSIONAL

Modular Preparation 400 mm Ambient Unit with 1 Hinged Door


Front

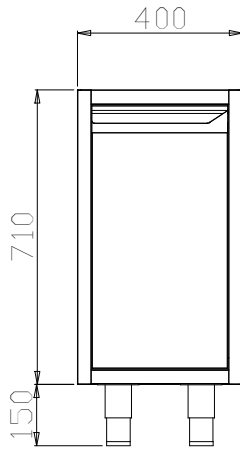

Side

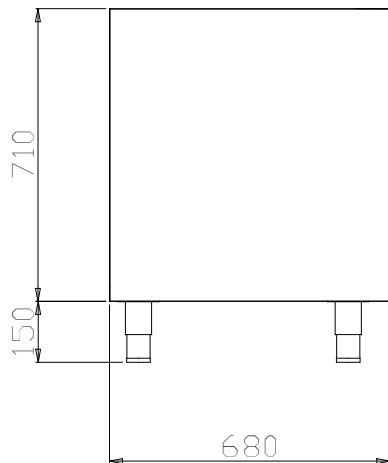

Top

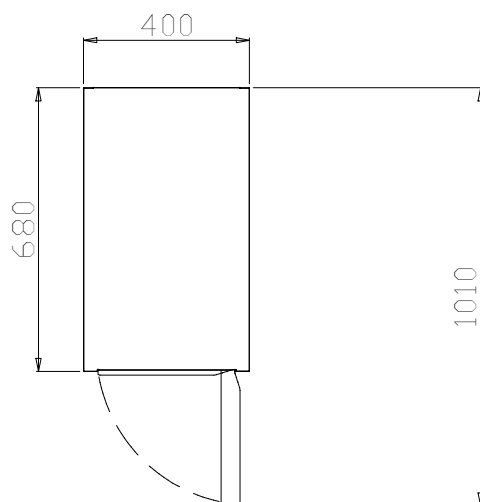

Key Information:

Cabinet width:	
121814 (TERP4)	330 mm
Cabinet depth:	645 mm
Cabinet height:	620 mm
N° of doors:	1
Door Type:	Hinged
External dimensions, Width:	400 mm
External dimensions, Depth:	680 mm
External dimensions, Height:	860 mm
Net weight:	9 kg

Modular Preparation
400 mm Ambient Unit with 1 Hinged Door

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.09.07