

Modular Preparation 400 mm Open Ambient Unit with GN 1-1 Runners

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



121930 (TEGG4)

Open Ambient Unit with
1/1GN runners, 400mm

Short Form Specification

Item No. _____

Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI stainless steel guide runners GN 1/1.

Main Features

- Masonry installation possible by simply removing feet.
- Extremely easy to clean thanks to the smooth edges.

Construction

- Made in 304 AISI CrNi 18/10 stainless steel with Scotch Brite finish.
- Front and rear lengthwise stainless steel c-channel reinforcement, 15/10 (16 gauges).
- Internal sides supporting the structure to have 45° degrees internal side corners junction system.
- 30 mm high middle-shelf in AISI 304 stainless steel, height-adjustable in 3 positions, with inner double fold to eliminate gaps between sides and back.
- Sound deadening reinforcements between internal and external side panels to strengthen structure.
- Mounted on 150 mm height adjustable (0/+90 mm) oversized (65x65 mm) feet.


APPROVAL: _____




Electrolux
PROFESSIONAL

Modular Preparation 400 mm Open Ambient Unit with GN 1-1 Runners


Front

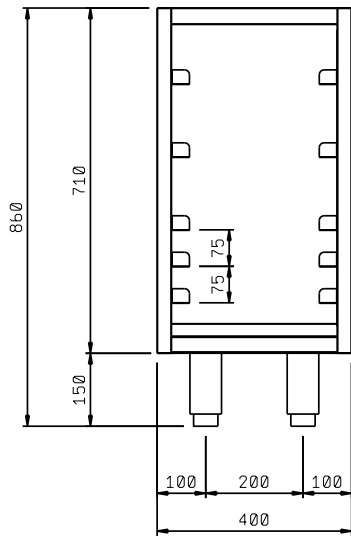

Side

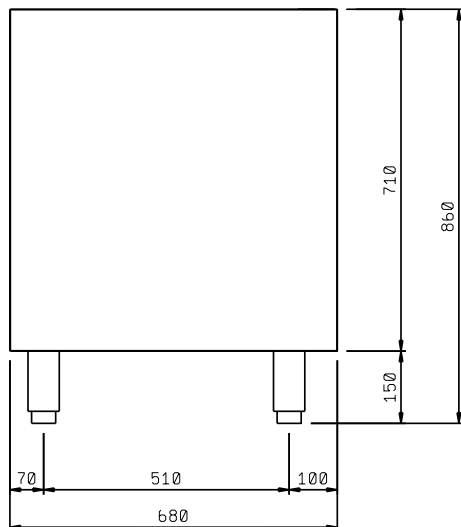

Top

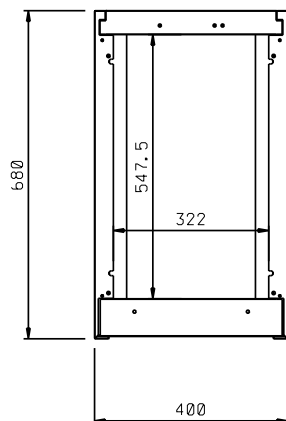

Key Information:

Cabinet width:	
121930 (TEGG4)	330 mm
Cabinet depth:	620 mm
Cabinet height:	645 mm
External dimensions, Width:	400 mm
External dimensions, Depth:	680 mm
External dimensions, Height:	860 mm
Net weight:	45 kg

Modular Preparation
400 mm Open Ambient Unit with GN 1-1 Runners

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.10.01