



**Electrolux**  
PROFESSIONAL

## Stainless Steel Preparation 475x1098 mm Aluminum Corner Unit

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**137074 (CLS1094)**

Corner Shelving Set with  
aluminium side uprights and  
4 polyethylene louvered  
shelves, 475x1098 mm

### Short Form Specification

**Item No.** \_\_\_\_\_

For corner installation. 4-level shelving set with louvered sectional polyethylene shelves (depth=475mm). Aluminium (20 micron) side uprights (height=1700mm). Adjustable feet. To be combined with a linear shelving unit

### Main Features

- Complete shelving system allows rapid and easy fixing of the shelves to the uprights.
- GN 1/1, GN 1/2 and GN 1/3 can be inserted into the frame.

### Construction

- Uprights and shelf frames constructed entirely in anodized aluminium (20 micron).
- Shelves made by section of polyethylene tablets.
- Sectional polyethylene shelves are dishwasher safe.
- Corner shelving must be fixed to a linear shelf (either 375mm or 475mm in depth) with the included bar clamps and can be positioned anywhere along the length of the linear shelf.
- 4 tiers and 4 corner clamps.

### Optional Accessories

- Polyethylene shelf with aluminium frame, 475x1062mm PNC 850065 ☐
- Angle joint for shelves (depth=475mm) PNC 850071 ☐
- 2 swivelling wheels, 100mm PNC 850072 ☐
- 2 swivelling wheels with brakes, 100mm PNC 850073 ☐

**APPROVAL:** \_\_\_\_\_




Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)




**Electrolux**  
PROFESSIONAL

## Stainless Steel Preparation 475x1098 mm Aluminum Corner Unit

Front

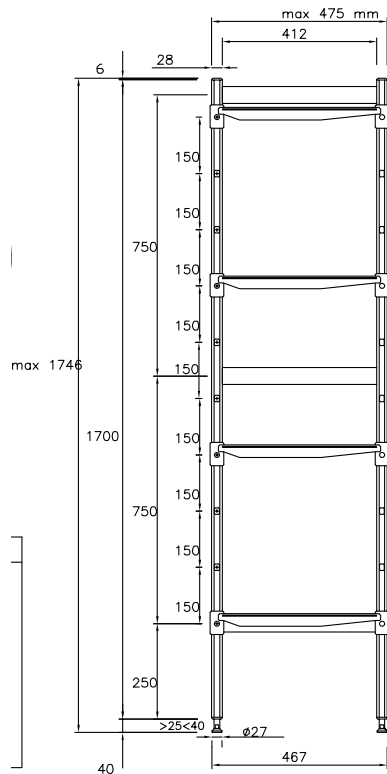

Top

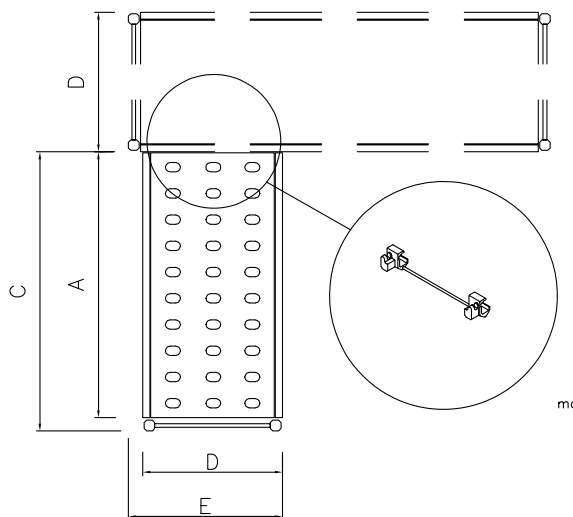

Other

|        | A mm | C mm | D mm | E mm |
|--------|------|------|------|------|
| 137070 | 708  | 744  | 475  | 509  |
| 137071 | 798  | 834  | 475  | 509  |
| 137072 | 886  | 922  | 475  | 509  |
| 137073 | 974  | 1010 | 475  | 509  |
| 137074 | 1062 | 1098 | 475  | 509  |
| 137075 | 1152 | 1188 | 475  | 509  |
| 137076 | 1240 | 1276 | 475  | 509  |
| 137077 | 1330 | 1366 | 475  | 509  |
| 137078 | 1505 | 1541 | 475  | 509  |

### Key Information:

#### Uprights

137074 (CLS1094)

1

External dimensions, Width: 1098 mm

External dimensions, Depth: 475 mm

External dimensions, Height: 1700 mm

Max loading weight: 760 kg

Net weight: 20 kg

Stainless Steel Preparation  
475x1098 mm Aluminum Corner Unit

The company reserves the right to make modifications to the products  
without prior notice. All information correct at time of printing.

2025.08.04