



**Electrolux**  
PROFESSIONAL

## Stainless Steel Preparation 475x1960 mm Aluminum Linear Units

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**137043 (BLS1960)**

Linear Shelving Set with  
aluminium side uprights and  
4 polyethylene louvered  
shelves, 475x1960 mm

### Short Form Specification

Item No. \_\_\_\_\_

For linear installation. 4-level shelving set with louvered sectional polyethylene shelves (depth=475mm). Aluminium (20 micron) side uprights (height=1700mm). Adjustable feet.

### Main Features

- Complete shelving system allows rapid and easy fixing of the shelves to the uprights.
- GN 1/1, GN 1/2 and GN 1/3 can be inserted into the frame.

### Construction

- Uprights and shelf frames constructed entirely in anodized aluminium (20 micron).
- Shelves made by section of polyethylene tablets.
- Sectional polyethylene shelves are dishwasher safe.
- 8 tiers.

### Optional Accessories


- Polyethylene shelf with aluminium frame, 475x886mm PNC 850063 ☐
- Polyethylene shelf with aluminium frame, 475x974mm PNC 850064 ☐
- Angle joint for shelves (depth=475mm) PNC 850071 ☐
- 2 swivelling wheels, 100mm PNC 850072 ☐
- 2 swivelling wheels with brakes, 100mm PNC 850073 ☐

APPROVAL: \_\_\_\_\_




Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)

Side

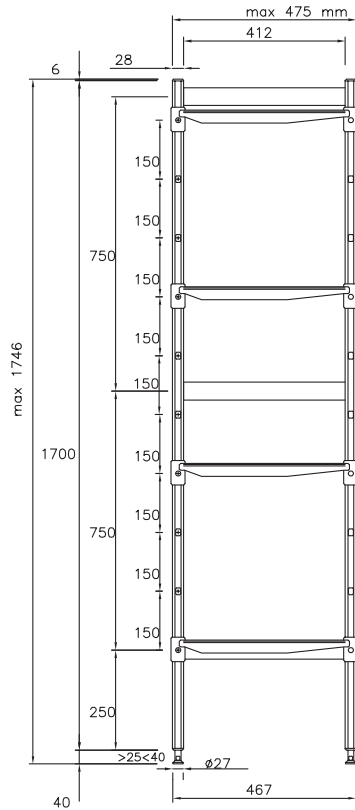

Top

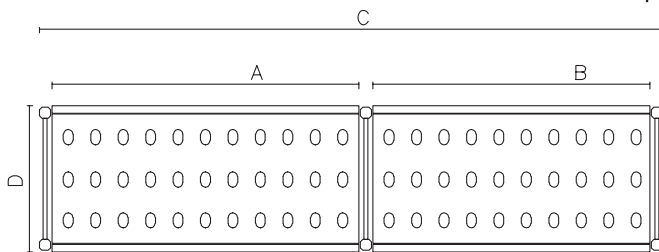

Other

|        | A mm | B mm | C mm | D mm |
|--------|------|------|------|------|
| 137039 | 708  | 798  | 1606 | 475  |
| 137040 | 798  | 798  | 1696 | 475  |
| 137041 | 798  | 886  | 1784 | 475  |
| 137042 | 886  | 886  | 1872 | 475  |
| 137043 | 886  | 974  | 1960 | 475  |
| 137044 | 974  | 974  | 2048 | 475  |
| 137045 | 1062 | 1062 | 2224 | 475  |
| 137046 | 1152 | 1152 | 2404 | 475  |
| 137047 | 1240 | 1240 | 2580 | 475  |
| 137048 | 1330 | 1330 | 2760 | 475  |
| 137049 | 1330 | 1505 | 2935 | 475  |

## Key Information:

### Uprights

137043 (BLS1960)

3

External dimensions, Width: 1960 mm

External dimensions, Depth: 475 mm

External dimensions, Height: 1700 mm

Max loading weight: 840;880 kg

Net weight: 38 kg