



**Electrolux**  
PROFESSIONAL

## Modular Preparation 500 mm Hot Cupboard with 3 Drawers

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



121833 (TE3C5R)

Hot Cupboard with 3  
drawers, 500mm

### Short Form Specification

#### Item No. \_\_\_\_\_

Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Drawers in 304 AISI stainless steel with telescopic runners for easy extraction of GN containers. 45° degree internal side corner junction system. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. Hot cupboard with channeled ventilation system (2-way output) to allow for a correct airflow and even temperature within the storage area. Fan-assisted heating via armoured elements assures temperature ranges from 30° to 90°C. Removable control panel with mechanical thermostat, green ON/OFF indicator light and orange indicator light for heating element operation.

### Main Features

- Masonry installation possible by simply removing feet.
- Extremely easy to clean thanks to the smooth edges.
- Accepts GN containers up to 150 mm in height.
- Model specific to keep dishes warm.

### Construction

- Front and rear lengthwise stainless steel c-channel reinforcement, 15/10 (16 gauges).
- Sound deadening reinforcements between internal and external side panels to strengthen structure.
- Mounted on 150 mm height adjustable (0/+90 mm) oversized (65x65 mm) feet.
- Internal sides supporting the structure to have 45° degrees internal side corners junction system.
- 30 mm high middle-shelf in AISI 304 stainless steel, height-adjustable in 3 positions, with inner double fold to eliminate gaps between sides and back.
- Supplied with a channeled ventilation system (2 way outputs) which allows a correct airflow and even temperature inside the storage area.
- Fan assisted heating via armored elements ensuring temperature range from 30° to 90°C.
- Detachable control panel with mechanical thermostat and on/off green and orange indicator light for heating element operation.
- Telescopic runners to ease extraction of GN containers.
- Constructed entirely in AISI 304 Stainless Steel with Scotch Brite finish.

### Optional Accessories

- Stainless steel plinth, 500mm PNC 855821 ☐
- Stainless steel plinth for end elements, 700mm depth PNC 855837 ☐

APPROVAL: \_\_\_\_\_




Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)




**Electrolux**  
PROFESSIONAL

## Modular Preparation 500 mm Hot Cupboard with 3 Drawers

Front

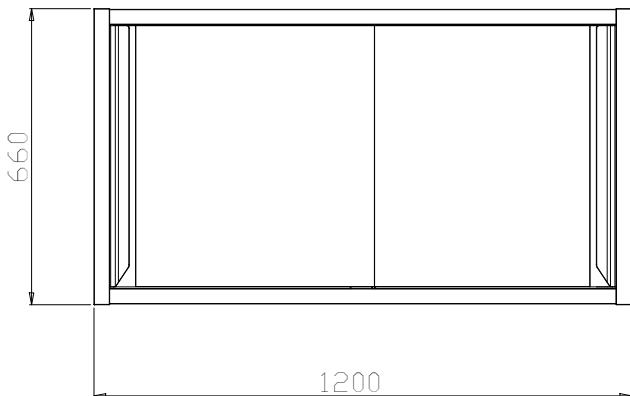


Side

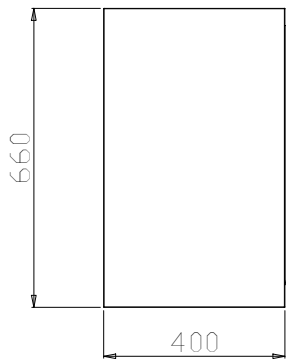

EI = Electrical inlet (power)

Top

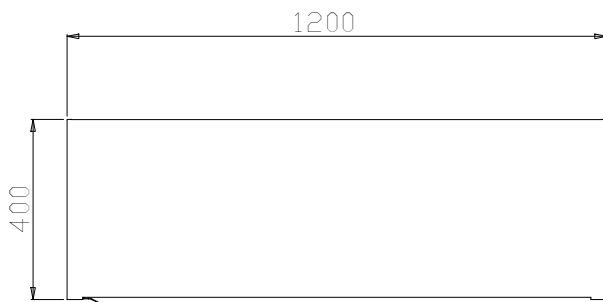

### Electric

Supply voltage:	230 V/1 ph/50/60 Hz
Total Watts:	1.4 kW

### Key Information:

Cabinet width:	500 mm
Cabinet depth:	680 mm
Cabinet height:	710 mm
External dimensions, Width:	500 mm
External dimensions, Depth:	680 mm
External dimensions, Height:	860 mm
Net weight:	40 kg
N° of drawers:	



Modular Preparation  
500 mm Hot Cupboard with 3 Drawers

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.06.30