

Warewashing HeroDry Freestanding blower for Hood Type and Undercounter Dishwasher

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



504350 (ETHDE1)

HeroDry freestanding
Blower for green&clean
Hood Type and
Undercounter Dishwasher

Short Form Specification

Item No. _____

Unit to be reversible, straight or corner, dryer suitable for installation on green&clean dishwasher handling, to boost drying effect. Ideal for any kind of crockery, suggested for reusable plastic items. Easy to operate by selecting one of the pre-settled 2 cycles, 130 sec. standard or 175 sec. Eco. Eco drying cycle activated via button, retro-illuminated. LED counter display shows machine status and allows to monitor the remaining drying cycle time. Dryer uses a diverted air flow to optimize the drying effect covering the full surface of the drying chamber. Energy Saving Device system allows fast temperature recovery by mixing the fresh air from the environment with the warm air from the chamber. Easy Rewarm function allows fast temperature recovery, maintaining constant in-store performances with minimum consumption, controlling the temperature inside the drying chamber via heating element switch. External panels and main structure in AISI 304 stainless steel. Electrical 380/415V three phase operation. Provided with a breaker button. Suitable for any feeding direction of the hood type/undercounter thanks to the easy reversibility on site by moving the external panels.

Main Features

- Drying zone removes most of the water from the crockery through a high powered fan that provides a greater air re-circulation flow; ensuring crockery will be at a temperature cool enough to be handled safely.
- Wide loading clearance allow to fit both 500x500 baskets for standard warewashing items or dining trays.
- User Interface provide on-off button, eco-cycle selection, start/pose button and a display that show machine status, alerts messages and cycles countdown.
- Electronically controlled to optimize drying results.
- IPx4 protection against splashing water, solid objects and small animals (larger than 6mm).
- The feeding direction can be either left to right or right to left in both straight or corner configuration, customizable on site.
- Supplied with 2 pairs of silicon curtains.
- Preheats by re-using the warm air from the chamber mixed with the environment fresh air and Rewarm function (activated as default) manages the power during standby to maintain the chamber temperature.
- Full accessibility to the interior and hygienic design to facilitate cleaning.
- Accessibility from the front for service purpose.

Construction

- Body made in heavy duty anticorrosive 304 type stainless steel.
- Heavy duty components for professional use.
- The freestanding unit is built to be placed close to the dishwasher and easily fits any layout, thanks to the on-site straight or corner configuration by easily changing the external panels position.

Optional Accessories

- Basket for reusable cups PNC 867082 ☐
- Protection grid for light items PNC 867083 ☐
- Front/side closure panel PNC 867084 ☐


APPROVAL: _____




Electrolux
PROFESSIONAL

Warewashing HeroDry Freestanding blower for Hood Type and Undercounter Dishwasher

Front

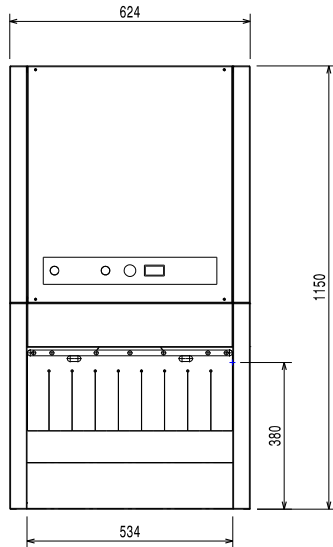


Side

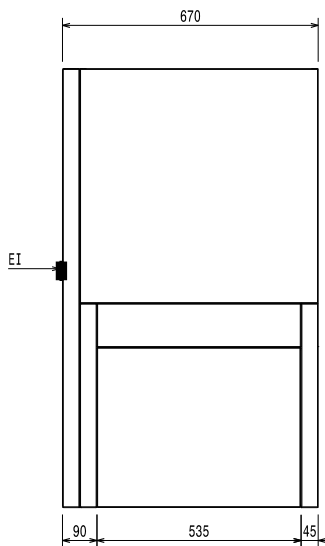

EI = Electrical inlet (power)
EO = Electrical Outlet

Top

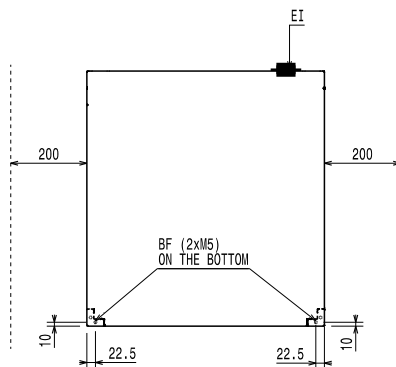

Electric

Supply voltage: 380-415 V/3N ph/50/60 Hz
Default Installed Power: 8.5 kW

Key Information:

Bowl's Capacity
Cycle, n: 2
Working cycle, sec (cycle1,
cycle2): 130/175
N° of cycles: 2
Duration cycle:* 130 sec.

Sustainability

Noise level: <62 dBA
Package type: Box on pallet



Warewashing
HeroDry Freestanding blower for Hood Type and Undercounter
Dishwasher
The company reserves the right to make modifications to the products
without prior notice. All information correct at time of printing.

2025.07.07