

Warewashing green&clean hood type Dishwasher, 80r/h

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____


520500 (EHT80ROW)

 Hood Type Dishwasher, with
 single skin manual hood,
 atmospheric boiler, 80r/h -
 S.E. Asia, China, India

Short Form Specification

Item No. _____

304 Stainless steel construction to include single skin hood, external, front and side panels, wash tank, tank filter plus wash and rinse arms. Uses 2 liters of clean water per final rinse cycle. 84°C rinse temperature and pressure guaranteed by AISI 304 built in atmospheric boiler and built in rinse booster pump. Washing performance is guaranteed by a powerful 0.8 kW wash pump and upper and lower stainless steel revolving washing spray arms. The unit is equipped with flexible fill hoses. Convertible from straight to corner operation and delivered on height-adjustable feet.

Main Features

- NSF/ANSI 3 and DIN 10512 compliant.
- Maximum capacity per hour of 80 racks or 1,440 dishes (High productivity mode) easy to switch to 63 racks or 1,134 dishes (NSF/ANSI 3 mode) by pressing a button.
- 45/84/150 seconds cycles (High productivity mode); 57/84/150 seconds cycles (NSF/ANSI 3 mode).
- Built-in atmospheric boiler sized to raise incoming cold water to a minimum of 84 °C for sanitizing rinse. No external boiler is required. Constant temperature of 84 °C throughout the rinsing cycle regardless of the network's water pressure.
- Unique temperature interlock guarantees required temperatures in both the wash and final rinse in case of emergency cold water feeding.
- Incorporated Soft Start feature to offer additional protection to more delicate items.
- Cycle may be interrupted at any time by lifting the hood.
- Automatic self-cleaning cycle and self-draining vertical wash pump and boiler to avoid bacteria proliferation.
- State-of-the-art electronic controls with built-in programming, self-diagnostics for serviceability and automatic interior self-cleaning cycle.
- IP25 protection against water jets, solid objects and small animals (larger than 6 mm).
- Slanted wash arms to avoid detergent-filled wash water dropping on clean dishes before the rinsing phase, thus guaranteeing ideal washing results.

Construction

- Heavy duty Stainless steel construction. Internal cavity as well as exterior panels are in 304 series Stainless steel.
- Pressed tank in front position to facilitate cleaning.
- Single skin hood supported by 3 springs to ensure smooth movement and guarantee operator safety.
- Specially designed Stainless steel wash/rinse arms and nozzles provide superior cleaning action.
- Revolving interchangeable Stainless steel wash/rinse arms above and below the rack, screw out for simple clean up.
- Pre-arranged for on-site HACCP implementation and Energy Management device.
- Element protection from dry fire and low water.

Sustainability

- The machine can be connected to cold water.
- Requires only 2 liters of water per washing cycle thus ensuring low energy, water, detergent and rinse aid consumption.

APPROVAL: _____




Included Accessories

- 1 of Stabbing basket 18 dishes 500x500mm PNC 888023
- 1 of Flat basket for cutlery containers 500x500mm PNC 888024


Optional Accessories

- Connectivity kit for Single Skin Hood Type Dishwashers (ECAP) PNC 864006 ☐
- Drain pump kit for single skin hood type PNC 864346 ☐
- Rinse aid dispenser kit for hood type PNC 864368 ☐
- Detergent dispenser kit for hood type PNC 864369 ☐
- Deliming device kit for Hood Type (drain pump included) PNC 864391 ☐
- Stabbing basket 18 dishes 500x500mm PNC 888023 ☐
- Flat basket for cutlery containers 500x500mm PNC 888024 ☐
- Power cord 3,5 m PNC 888025 ☐

Front

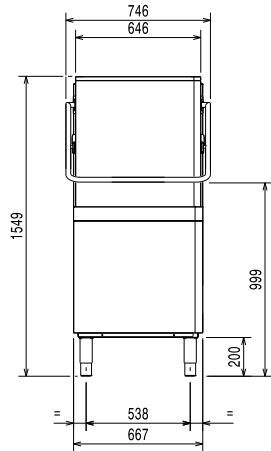


Side

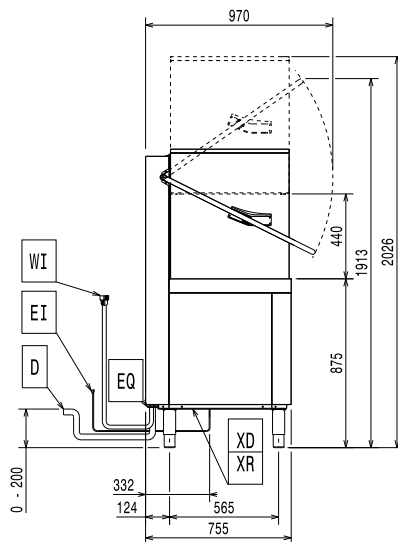

CWII = Cold Water inlet 1 (cleaning)
 D = Drain
 EI = Electrical inlet (power)
 EO = Electrical Outlet
 HWI = Hot water inlet
 WI = Water inlet

Top

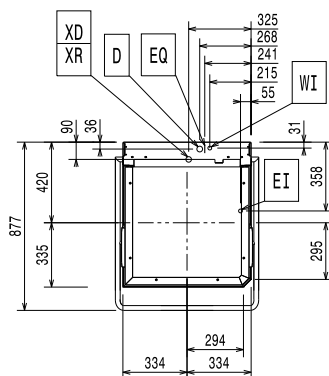

Electric

Supply voltage: 400 V/3N ph/50 Hz
 Convertible to: 230V 1N~; 230V 3~
 Default Installed Power: 9.9 kW
 Tank heating elements: 3 kW
 Boiler Heating Elements Power: 9 kW

Water:

Water supply temperature*: 10-65 °C
 Drain line size: 20.5mm
 Inlet water supply pressure: 0.5-7 bar
 Water consumption per cycle (lt): / 2
 Boiler Capacity (lt): 12
 Tank Capacity (lt): 24

Key Information:

N° of cycles: 3
 Duration cycle*: 45/84/150 sec.
 Duration cycle - NSF/ANSI 3 compliant: 57/84/150 sec.
 Racks per hour*: 80
 Racks per hour - NSF/ANSI 3 compliant: 63
 Dishes per hour*: 1440
 Dishes per hour - NSF/ANSI 3 compliant: 1134
 Wash temperature: 55-65 °C
 Wash temperature - NSF/ANSI 3 compliant: 75 °C
 Rinse temperature: 84 °C
 External dimensions, Width: 746 mm
 External dimensions, Depth: 755 mm
 External dimensions, Height: 1549 mm
 Net weight: 106 kg
 Shipping weight: 117 kg
 Shipping height: 1710 mm
 Shipping width: 920 mm
 Shipping depth: 770 mm
 Shipping volume: 1.21 m³

** When connected to cold water, the cycle time will be prolonged accordingly. The machine will have productivity per hour of 48 racks at 10°C supply temperature or 55 racks at 20°C supply temperature

Sustainability

Noise level: <68 dBA