

## Warewashing Medium hot air blower zone without door for green&clean multi-rinse Rack Type Dishwasher

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**534056 (NMHABE)**

 Medium hot air blower zone  
without door for  
green&clean Multi Rinse  
Rack Type Dishwasher

### Short Form Specification

**Item No.** \_\_\_\_\_

Unit to be medium hot air blower without door suitable to be installed with green&clean multi-rinse rack type dishwasher. Electrical characteristics to be \_\_ 400V three phase operation. The addition of the external air reduces the internal humidity thus increasing the drying efficiency without high energy consumption. Construction in AISI 304 stainless steel. Suitable for any feeding direction of the dishwasher thanks to easy reversibility on-site. Full pre-arrangement to be connected with green&clean multi-rinse rack type dishwasher without any modification.

### Main Features

- Unit to be placed between multi-rinse rack type dishwasher and handling system.
- All main components made in heavy duty anti-corrosive 304 type stainless steel: internal chamber, external, front and side panels and rack transportation system.
- Drying zone removes most of water from the crockery through a high powered fan that extracts dry air from outside mixing it with the internal air, thus providing dry plates at a temperature cool enough to handle safely.
- Electronically controlled to optimize drying results.
- IP25 protection against water jets, solid objects and small animals (larger than 6 mm).
- The feeding direction can be either left to right or right to left as it's reversible on site.

### Construction

- The chamber is pressed with fully rounded corners without internal pipes and therefore no hidden dirt traps.
- The unit is built on modularity concept to easily connect with multi-rinse rack type dishwasher without any modification including power connection.

### Optional Accessories

- Plain undershelf with hole for drain for Hot Air Blower, 560 mm PNC 863228 ☐
- Grid undershelf for Hot Air Blower, 555 mm PNC 863229 ☐
- Pair of legs for long conveyors connected directly to the Rack Type Dishwasher with hot air blower PNC 865477 ☐


**APPROVAL:** \_\_\_\_\_




**Electrolux**  
PROFESSIONAL

**Warewashing**  
**Medium hot air blower zone without door for**  
**green&clean multi-rinse Rack Type Dishwasher**

Front

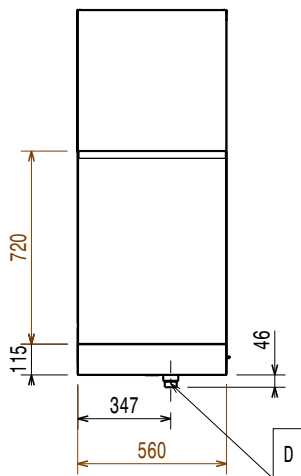


Side

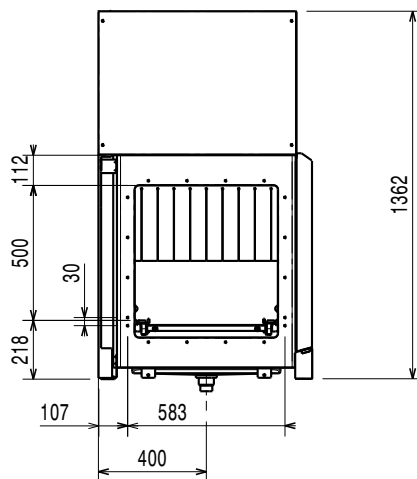

- D = Drain
- EI = Electrical inlet (power)
- EO = Electrical Outlet
- EQ = Equipotential screw
- ES = Electrical signal IN/OUT
- U = USB port

Top



**Electric**

Supply voltage:	380-415 V/3N ph/50 Hz
Default Installed Power:	4.4 kW
Dryer heating elements:	4.13 kW
Drying fan power:	0.23 kW

**Key Information:**

Reference norm used to measure the noise:  
IEC60335-2-58 annex AA.

Charging hole size (width):	530 mm
External dimensions, Width:	560 mm
External dimensions, Depth:	795 mm
External dimensions, Height:	1362 mm
Charging hole size (height):	490 mm
Net weight:	75 kg
Shipping weight:	75 kg
Shipping height:	1560 mm
Shipping width:	900 mm
Shipping depth:	720 mm
Shipping volume:	1.01 m <sup>3</sup>
Dryer air flow:	540 m <sup>3</sup> /h
Dryer air temperature:	70 °C

**Sustainability**

Noise level:	<62 dBA
--------------	---------



**Warewashing**  
**Medium hot air blower zone without door for green&clean multi-rinse**  
**Rack Type Dishwasher**  
The company reserves the right to make modifications to the products  
without prior notice. All information correct at time of printing.

2025.04.18