

Warewashing Medium hot air blower zone without door for green&clean multi-rinse Rack Type Dishwasher

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		



534056 (NMHABE)

Medium hot air blower zone without door for green&clean Multi Rinse Rack Type Dishwasher

Short Form Specification

Item No.

Unit to be medium hot air blower without door suitable to be installed with green&clean multi-rinse rack type dishwasher. Electrical characteristics to be __ 400V three phase operation. The addition of the external air reduces the internal humidity thus increasing the drying efficiency without high energy consumption. Construction in AISI 304 stainless steel. Suitable for any feeding direction of the dishwasher thanks to easy reversibility on-site. Full pre-arrangement to be connected with green&clean multi-rinse rack type dishwasher without any modification.

Main Features

- Unit to be placed between multi-rinse rack type dishwasher and handling system.
- All main components made in heavy duty anticorrosive 304 type stainless steel: internal chamber, external, front and side panels and rack transportation system.
- Drying zone removes most of water from the crockery through a high powered fan that extracts dry air from outside mixing it with the internal air, thus providing dry plates at a temperature cool enough to handle safely.
- Electronically controlled to optimize drying results.
- IP25 protection against water jets, solid objects and small animals (larger than 6 mm).
- The feeding direction can be either left to right or right to left as it's reversible on site.

Construction

- The chamber is pressed with fully rounded corners without internal pipes and therefore no hidden dirt traps.
- The unit is built on modularity concept to easily connect with multi-rinse rack type dishwasher without any modification including power connection.


Optional Accessories

- Plain undershelf with hole for drain for Hot Air Blower, 560 mm
- Grid undershelf for Hot Air
 PNC 863229 □
 Blower, 555 mm
- Pair of legs for long conveyors connected directly to the Rack Type Dishwasher with hot air blower

PNC 865477 🗖

APPROVAL:



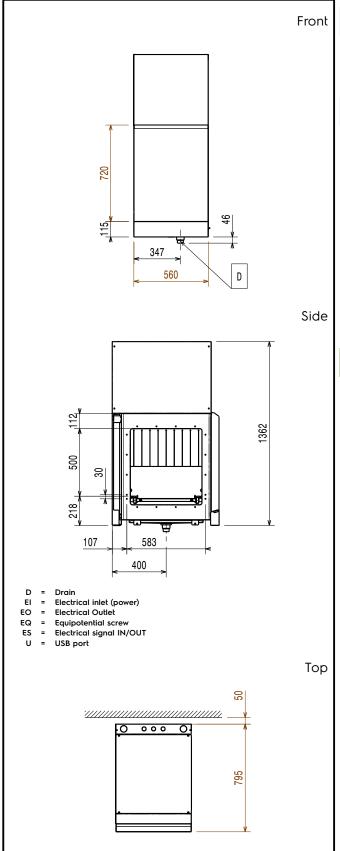

Electric

Supply voltage: 380-415 V/3N ph/50 Hz

Default Installed Power: 4.4 kW Dryer heating elements: 4.13 kW 0.23 kW Drying fan power:

Key Information:

Reference norm used to measure the noise: IEC60335-2-58 annex AA.

Charging hole size (width): 530 mm External dimensions, Width: 560 mm External dimensions, Depth: 795 mm External dimensions, Height: 1362 mm Charging hole size (height): 490 mm Net weight: 75 kg Shipping weight: 75 kg Shipping height: 1560 mm Shipping width: 900 mm Shipping depth: 720 mm Shipping volume: 1.01 m³ Dryer air flow: 540 m³/h Dryer air temperature: 70 °C

Sustainability

Noise level: <62 dBA

