

Soft Served
Capri Soft Ice Cream Dispenser, 1
flavour, electronical control & touch
panel, 290cones/h-pump

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

**560063 (CAP114DPA3PH)**

Soft ice cream dispenser with 8 l tank capacity and 1,95 l cylinder volume, 1 flavour, electronical control and touch screen panel, countertop, hourly production: 290 cones (75 gr), pump version, R452A

Short Form Specification

Item No. _____

Soft ice cream and frozen yogurt dispenser with 8 l tank capacity and 1,95 l cylinder volume, 1 flavour, hourly production: 290 cones (75gr). Digital control and touch screen panel. It is a countertop appliance with pump system. Tank agitator and stainless steel drip tray are included as standard. Air-cooled version: requires no water connections that means less operating costs and it is easy to install.

Main Features


- Countertop appliance with pump delivers soft ice cream and frozen yogurt, single-flavor equipment.
- Thanks to the pump feeding system, the equipment incorporates more air - high overrun - and therefore the dispensed ice cream is lighter and softer. High overrun means higher profit.
- Digital control with touch screen.
- The machine is equipped with tank agitator and stainless steel drip tray.
- Equipped with a 8 liters tank capacity and dispenses up to 290 cones/h (75 gr cones).

Construction


- Air-cooled version requires no water connections that means low operating costs and easy installation.
- Environmentally friendly: R452a as refrigerant gas.

APPROVAL: _____


Front

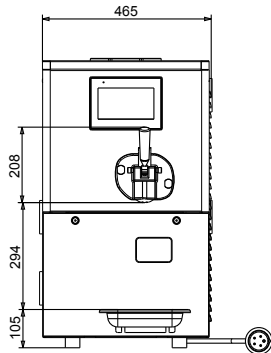

Side

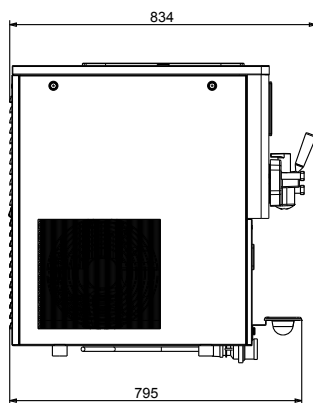

Distances

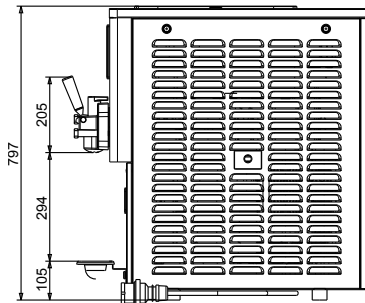

Electric

Supply voltage:

560063 (CAP114DPA3PH) 380-400 V/3N ph/50 Hz

Electrical power max.:

2 kW

Key Information:

External dimensions, Width: 475 mm

External dimensions, Depth: 600 mm

External dimensions, Height: 791 mm

Net weight: 120 kg

Freezing cylinder capacity: 195 l

Preparation system: Pump

N° of hoppers/grinders: 1

Hopper capacity: 8 l

Plug type: IEC/EN 60309-1/2

Refrigeration Data

Operating temperature min.: 20 °C

Operating temperature max.: 36 °C

Sustainability

Refrigerant type: R452A

Refrigerant weight: 780 g