

## Soft Served Firenze Soft Ice Cream Dispenser, 1 flavour, electronical control & touch panel, 310cones/h-gravity

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	
AIA #	_



#### 560070 (FIR118DGA3PH)

Soft ice cream dispenser with 13 I tank capacity and 1,95 I cylinder volume, 1 flavour, electronical control and touch screen panel, free standing, hourly production: 310 cones (75 gr), gravity version, R452A

# **Short Form Specification**

#### Item No.

Soft ice cream frozen yogurt dispenser with 13 I tank capacity and 1,95 I cylinder volume, 1 flavour, hourly production: 310 cones (75 gr). Digital control and touch screen panel. It is a floor-standing appliance, with gravity system. The tank agitator and the stainless steel drip tray are included as standard. Air-cooled version: requires no water connections that mean less operating costs and it is easy to install. R452a as refrigerant gas.

#### **Main Features**

- Floor-standing appliance, single-flavor equipment with gravity system.
- It delivers soft ice cream and frozen yogurt.
- Equipped with a tank of 13 liters capacity and dispenses 310 cones/h (75gr cones).
- The machine is equipped with tank agitator and stainless steel drip tray.
- Digital control with touch screen.
- The gravity machine is extremely easy to use, clean and maintain. Ice cream has a strong and very intense flavor.


### Construction


- Air-cooled version requires no water connections that means low operating costs and easy installation.
- Environmentally friendly: R452a as refrigerant gas.


APPROVAL:







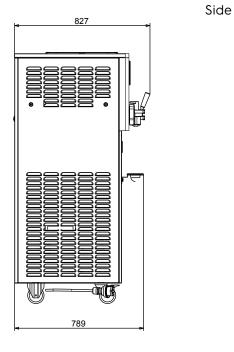





Supply voltage:

**560070 (FIR118DGA3PH)** 380-400 V/3N ph/50 Hz

Electrical power max.: 2.7 kW

**Key Information:** 

External dimensions, Width: 470 mm
External dimensions, Depth: 831 mm
External dimensions, Height: 1529 mm
Net weight: 159 kg
Freezing cylinder capacity: 1.95 l
Preparation system: Gravity
N° of hoppers/grinders: 1
Hopper capacity: 13 l

**Plug type:** IEC/EN 60309-1/2

**Refrigeration Data** 

Operating temperature min.: 20 °C Operating temperature max.: 40 °C

Sustainability

Refrigerant type: R452A

