

Soft Served Portofino Soft Ice Cream Dispenser, 2 flavours+1mix, electr.control&touch panel, 600cones/h-pump



DR214DPA3PH) Soft ice cream dispenser with 2x8 I tank capacity and 1,95 I cylinder volume, 2 flavours + 1 mix, electronical control and touch screen panel, countertop, hourly production: 600 cones (75 gr), pump version, R452A

## **Short Form Specification**

### Item No.

Soft ice cream and frozen yogurt dispenser with 2x8 I tank capacity and 1,95 I cylinder volume, 2 flavours + 1 mix, hourly production: 600 cones (75 gr). Digital control and touch screen panel. It is a countertop appliance with pump system. The tank agitator and the stainless steel drip tray are are included as standard. R452a as refrigerant gas. Air-cooled version: requires no water connections that means less operating costs and it is easy to install.

| ITEM #  |  |
|---------|--|
| MODEL # |  |
| NAME #  |  |
| SIS #   |  |
| AIA #   |  |

## Main Features

- It delivers soft ice cream and frozen yogurt.
- Thanks to the pump feeding system, the equipment incorporates more air high overrun and therefore the dispensed ice cream is lighter and softer. High overrun means higher profit.
- Digital control with touch screen.
- The machine is equipped with tank agitator and stainless steel drip tray.
- It delivers up to 600 cones/h (75 gr.) of soft ice cream and frozen yogurt.
- Countertop appliance with pump delivers soft ice cream and frozen yogurt, two-flavor equipment.
- The machine is equipped with two tanks of 8 liters capacity and dispenses 600 cones/h (75gr cones).


## Construction

- Air-cooled version requires no water connections that means low operating costs and easy installation.
- Environmentally friendly: R452a as refrigerant gas.

#### APPROVAL:

# Electrolux PROFESSIONAL

#### Soft Served Portofino Soft Ice Cream Dispenser, 2 flavours+1mix, electr.control&touch panel, 600cones/h-pump

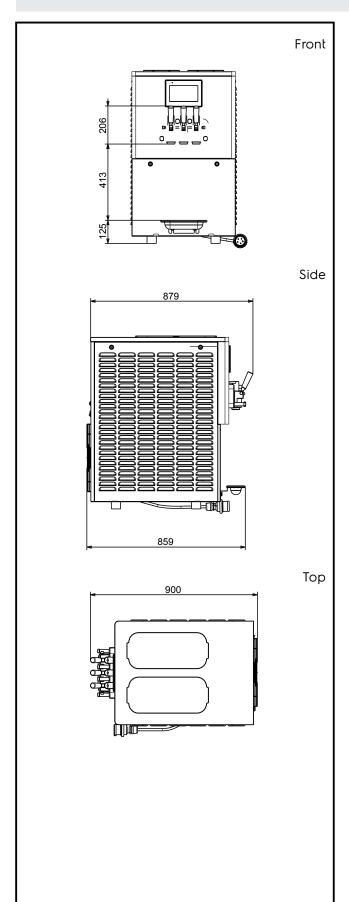

| Electric   |  |
|--|--|
| Supply voltage:<br>560075 (POR214DPA3PH)<br>Electrical power max.:   | 380-400 V/3N ph/50 Hz<br>4.5 kW  |
| Key Information:   |  |
| External dimensions, Width:<br>External dimensions, Depth:<br>External dimensions, Height:<br>Net weight:<br>Freezing cylinder capacity:<br>Preparation system:<br>N° of hoppers/grinders:<br>Hopper capacity:<br>Plug type: | 572 mm<br>875 mm<br>931 mm<br>201 kg<br>1.95 l<br>Pump<br>2<br>8 l<br>IEC/EN 60309-1/2 |
| Refrigeration Data   |  |
| Operating temperature min :  | 20 °C  |

| Operating | temperature | min.: | 20 °C |
|-----------|-------------|-------|-------|
| Operating | temperature | max.: | 40 °C |
|           |             |       |       |

# Sustainability

| Refrigerant type:   |  |
|---------------------|--|
| Refrigerant weight: |  |

R452A 1100 g