

**Soft Served  
 Roma Soft Ice Cream Dispenser, 2  
 flavours+1mix, electr.control&touch  
 panel, 550cones/h-gravity**

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**560078 (ROM218DGA3PH)** Soft ice cream dispenser with 2x13 l tank capacity and 1,95 l cylinder volume, 2 flavours + 1 mix, electronic control and touch screen panel, free standing, hourly production: 550 cones (75 gr), gravity version, R452A

### Short Form Specification

**Item No.** \_\_\_\_\_

Soft ice cream dispenser with 2x13 l tank capacity and 1,95 l cylinder volume, 2 flavours + 1 mix, hourly capacity: 550 cones/h (75gr cones). Digital control and touch screen panel, free standing with gravity version. Tank agitator and drip tray are included as standard. Air-cooled version: requires no water connections that means less operating costs and it is easy to install. Environmentally friendly: R452a as refrigerant gas.

### Main Features


- Digital control with touch screen.
- The machine is equipped with two tanks of 13 liters capacity and dispenses 550 cones/h (75gr cones).
- The machine is equipped with tank agitator and stainless steel drip tray.
- It delivers soft ice cream and frozen yogurt.
- Free-standing appliance, two-flavors equipment with gravity feeding system.
- The gravity machine is extremely easy to use, clean and maintain. Ice cream has a strong and very intense flavor.

### Construction


- Air-cooled version requires no water connections that means low operating costs and easy installation.
- Environmentally friendly: R452a as refrigerant gas.

**APPROVAL:** \_\_\_\_\_


Front

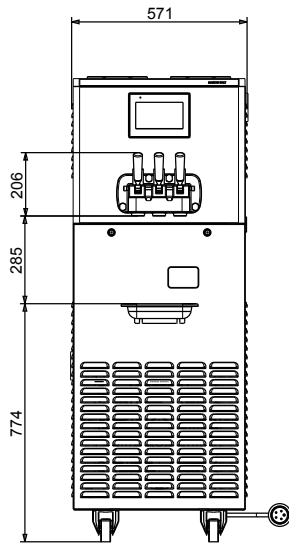

Side

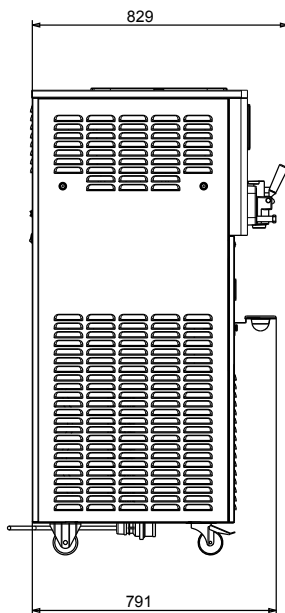

Top



### Electric

**Supply voltage:**

560078 (ROM218DGA3PH) 380-400 V/3N ph/50 Hz

**Electrical power max.:**

5.1 kW

### Key Information:

External dimensions, Width:	571 mm
External dimensions, Depth:	834 mm
External dimensions, Height:	1528 mm
Net weight:	221 kg
Freezing cylinder capacity:	1.95 l
Preparation system:	Gravity
N° of hoppers/grinders:	2
Hopper capacity:	13 l
Plug type:	IEC/EN 60309-1/2

### Refrigeration Data

Operating temperature min.:	20 °C
Operating temperature max.:	40 °C

### Sustainability

Refrigerant type:	R452A
Refrigerant weight:	1465 g