



Electrolux
PROFESSIONAL

**Soft Served
Roma Soft Ice Cream Dispenser, 2
flavours+1mix, electr.control&touch
panel, 650cones/h-pump**

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



560079 (ROM218DPA3PH)

Soft ice cream dispenser with 2x11 l tank capacity and 1,95 l cylinder volume, 2 flavours + 1 mix, electronic control and touch screen panel, free standing, hourly production: 650 cones (75 gr), pump version, R452A

Short Form Specification

Item No. _____

Soft ice cream dispenser with 2x11 l tank capacity and 1,95 l cylinder volume, 2 flavours + 1 mix, hourly capacity: 650 cones/h (75gr cones). Digital control and touch screen panel, free standing with pump version. Tank agitator and drip tray are included as standard. Air-cooled version: requires no water connections that means less operating costs and it is easy to install. Environmentally friendly: R452a as refrigerant gas.

Main Features

- Free-standing appliance, two-flavors equipment with pump feeding system.
- It delivers soft ice cream and frozen yogurt.
- Very powerful soft ice cream machine.
- The machine is equipped with two tanks of 11 liters capacity and dispenses 650 cones/h (75gr cones).
- Thanks to the pump feeding system, the equipment incorporates more air - high overrun - and therefore the dispensed ice cream is lighter and softer. High overrun means higher profit.
- The machine is equipped with tank agitator and stainless steel drip tray.
- Digital control with touch screen.

Construction


- Air-cooled version requires no water connections that means low operating costs and easy installation.
- Environmentally friendly: R452a as refrigerant gas.

APPROVAL: _____




Experience the Excellence
www.electroluxprofessional.com


Front

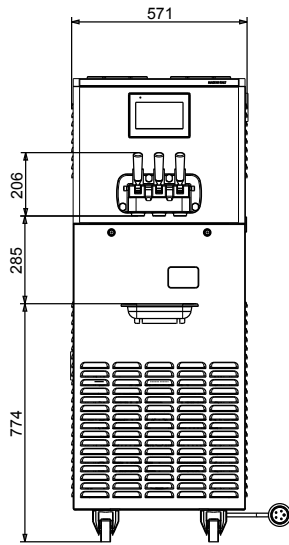

Side

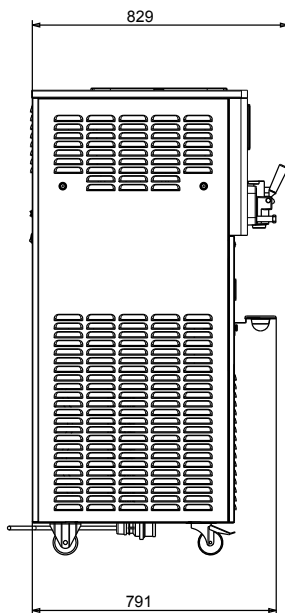

Top



Electric

Supply voltage:

560079 (ROM218DPA3PH) 380-400 V/3N ph/50 Hz

Electrical power max.:

5.1 kW

Key Information:

External dimensions, Width: 571 mm

External dimensions, Depth: 834 mm

External dimensions, Height: 1528 mm

Net weight: 221 kg

Freezing cylinder capacity: 1.95 l

Preparation system: Pump

N° of hoppers/grinders: 2

Hopper capacity: 11 l

Plug type: IEC/EN 60309-1/2

Refrigeration Data

Operating temperature min.: 20 °C

Operating temperature max.: 40 °C

Sustainability

Refrigerant type: R452A

Refrigerant weight: 1465 g