

Frozen Frozen granita dispenser with 2 bowls, electronic control and lighted panel



562511 (IPRO2ELR290)

Frozen Granita Dispenser with 2X11 I insulated bowls, electronic control and lighted panel, R290

# **Short Form Specification**

#### Item No.

Frozen granita dispenser with 2 bowls; the ITANK <sup>™</sup> Technology prevents ice accumulation on the outer side of the bowl and the bowl shape allows a natural mixing action to ensure an optimum consistency of the product. Customizable lid merchandiser and back graphic. Electronic control system and touch screen keypad. Front illuminated panel. Sliding drip tray.

ITEM #	
MODEL #	
NAME #	
<u>SIS #</u>	
AIA #	

## **Main Features**

- Ideal for the production of slush.
- The ITANK <sup>™</sup> Technology prevents ice accumulation on the outer side of the bowl, reducing condensation and increasing the cooling power of the machine.
- Bowl shape allows a natural mixing action to ensure an optimum consistency of the product.
- Customizable lid merchandiser and back graphic.
- The front illuminated panel provides customers with the opportunity to advertise their product and maximise impulse buying.
- Daily and weekly machine programming functionality.
- The insulated tank guarantees higher cooling efficiency and lower effect of the external temperature on product's preparation and maintenance time reducing condense and draining; it is the best solution in hot climate conditions.

### Construction

- Electronic control system and touch screen keypad.
- Sliding drip tray.

### Sustainability




• When the product reaches the right consistency, an automatic stand-by mode activates in order to save energy and reduce CO2 emissions.

#### APPROVAL:



## Frozen Frozen granita dispenser with 2 bowls, electronic control and lighted panel

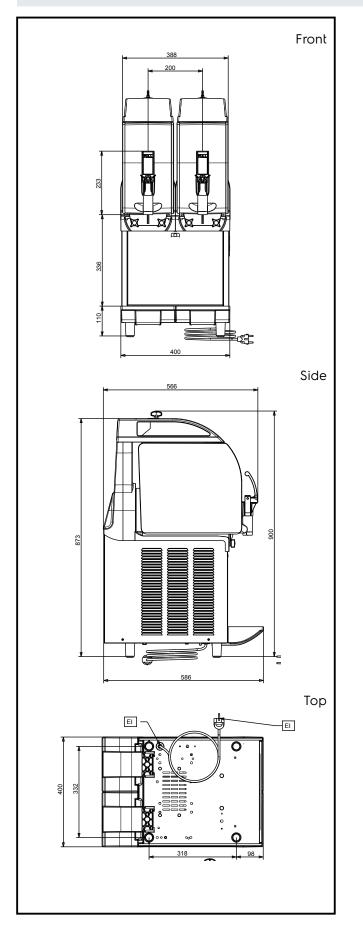

Frozen Frozen granita dispenser with 2 bowls, electronic control and lighted panel The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



Electric	
Supply voltage: Electrical power max:	220-240 V/1 ph/50 Hz 0.75 kW
Key Information:	
Net weight:	60 kg
Sustainability	
Refrigerant type: Refrigerant weight:	R290 106 g

