

Frozen Frozen granita dispenser with 3 bowls, electronic control



562512 (IPRO3ER290)

Frozen Granita Dispenser with 3X11 I insulated bowls, electronic control, R290

Short Form Specification

Item No.

Frozen granita dispenser with 3 bowls; the ITANK ™ Technology prevents ice accumulation on the outer side of the bowl and the bowl shape allows a natural mixing action to ensure an optimum consistency of the product. Customizable lid merchandiser and back graphic. Electronic control system and touch screen keypad. Sliding drip tray.

ITEM #	
MODEL #	
NAME #	
<u>SIS #</u>	
AIA #	

Main Features

- Ideal for the production of slush.
- The ITANK [™] Technology prevents ice accumulation on the outer side of the bowl, reducing condensation and increasing the cooling power of the machine.
- Bowl shape allows a natural mixing action to ensure an optimum consistency of the product.
- Customizable lid merchandiser and back graphic.
- Daily and weekly machine programming functionality.
- The insulated tank guarantees higher cooling efficiency and lower effect of the external temperature on product's preparation and maintenance time reducing condense and draining; it is the best solution in hot climate conditions.

Construction

- Electronic control system and touch screen keypad.
- Sliding drip tray.


Sustainability

• When the product reaches the right consistency, an automatic stand-by mode activates in order to save energy and reduce CO2 emissions.

APPROVAL:

Electrolux PROFESSIONAL

Frozen Frozen granita dispenser with 3 bowls, electronic control

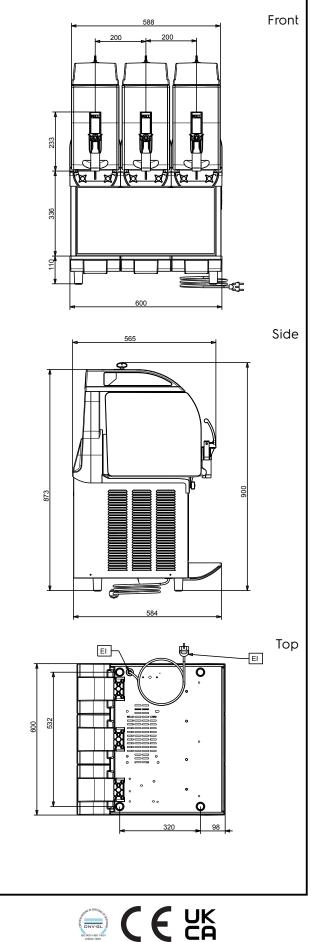

Electric	
Supply voltage: 562512 (IPRO3ER290) Electrical power max.:	220-240 V/1 ph/50 Hz 1.25 kW
Key Information:	
External dimensions, Width: External dimensions, Depth: External dimensions, Height: Net weight:	600mm 580mm 870mm 81 kg
Sustainability	
Refrigerant type:	R290

Frozen Frozen granita dispenser with 3 bowls, electronic control

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.