

Frozen Frozen granita dispenser with 3 bowls, electronic control with UK plug



562524 (IPRO3ER290)

Frozen Granita Dispenser with 3X11 I insulated bowls, electronic control, R290 - UK plug

Short Form Specification

Item No.

Frozen granita dispenser with 3 bowls; the ITANK ™ Technology prevents ice accumulation on the outer side of the bowl and the bowl shape allows a natural mixing action to ensure an optimum consistency of the product. Customizable lid merchandiser and back graphic. Electronic control system and touch screen keypad. Sliding drip tray.

Delivered with UK plug.

Main Features

- Ideal for the production of slush.
- The ITANK [™] Technology prevents ice accumulation on the outer side of the bowl, reducing condensation and increasing the cooling power of the machine.
- Bowl shape allows a natural mixing action to ensure an optimum consistency of the product.
- Customizable lid merchandiser and back graphic.
- Daily and weekly machine programming functionality.
- The insulated tank guarantees higher cooling efficiency and lower effect of the external temperature on product's preparation and maintenance time reducing condense and draining; it is the best solution in hot climate conditions.

Construction

- Electronic control system and touch screen keypad.
- Sliding drip tray.


Sustainability

• When the product reaches the right consistency, an automatic stand-by mode activates in order to save energy and reduce CO2 emissions.

APPROVAL:



Frozen Frozen granita dispenser with 3 bowls, electronic control with UK plug

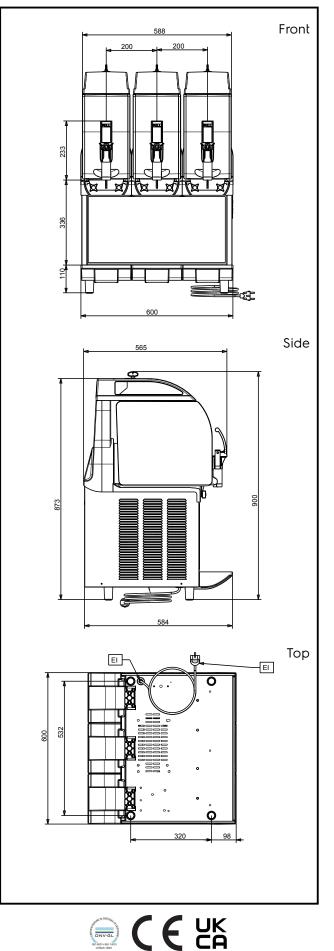

Electric	
Supply voltage: 562524 (IPRO3ER290) Electrical power max.:	220-240 V/1 ph/50 Hz 1.25 kW
Key Information:	
External dimensions, Width: External dimensions, Depth: External dimensions, Height: Net weight:	600mm 580mm 870mm 81 kg
Sustainability	
Refrigerant type:	R290

Frozen Frozen granita dispenser with 3 bowls, electronic control with UK plug

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.